

# 3D User Interface Techniques for Selection and Manipulation


Lecture #8: Selection and Manipulation  
Spring 2014  
Joseph J. LaViola Jr.

Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Interaction Workflow

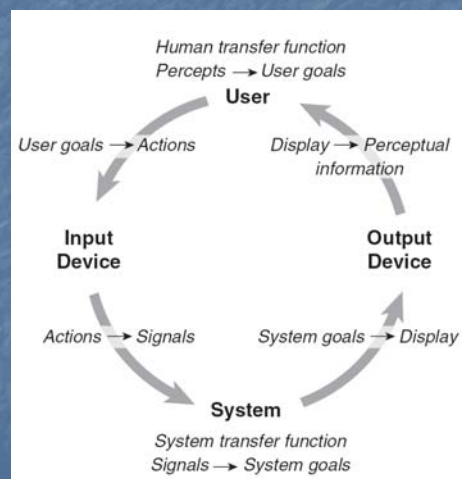

Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Universal 3D Interaction Tasks

- Navigation
  - Travel – motor component
  - Wayfinding – cognitive component
- Selection
- Manipulation
- System control
- Symbolic input

## Why Selection and Manipulation?

- Major method of interaction with physical environments
- Major method of interaction with virtual environments
- Affects the quality of entire 3D interface
- Design of 3D manipulation techniques is difficult

## Lecture Outline

- What is 3D selection and manipulation?
- Relationship between IT and input device
- Manipulation technique classification
- Techniques
  - selection
  - manipulation
  - hybrid
- Isomorphism vs. Non-isomorphism

Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Selection & Manipulation

- Selection: specifying one or more objects from a set
- Manipulation: modifying object properties (position, orientation, scale, shape, color, texture, behavior, etc.)

Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Goals of Selection

- Indicate action on object
- Query object
- Make object active
- Travel to object location
- Set up manipulation

## Selection Performance

- Variables affecting user performance
  - object distance from user
  - object size
  - density of objects in area
  - occluders

# Canonical Parameters

- Selection
  - distance and direction to target
  - target size
  - density of objects around the target
  - number of targets to be selected
  - target occlusion.
- Positioning
  - distance/direction to initial position
  - distance/direction to target position
  - translation distance
  - required precision of positioning
- Rotation
  - distance to target
  - initial orientation
  - final orientation
  - amount of rotation


Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

# 3D Interaction Techniques and the Input Device

- Number of control dimensions
- Control Integration
- Force vs. Position control
- Device placement
- Form Factor

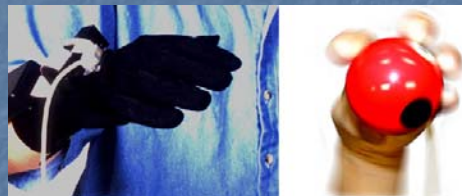

Attached to Hand


Rolled with fingers

Spring 2014


CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

# Technique Classification by Metaphor

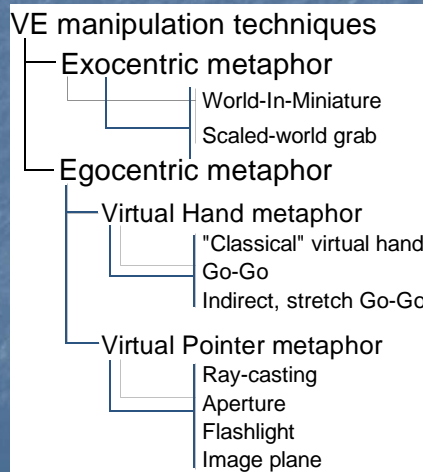

# Technique Classification by Components

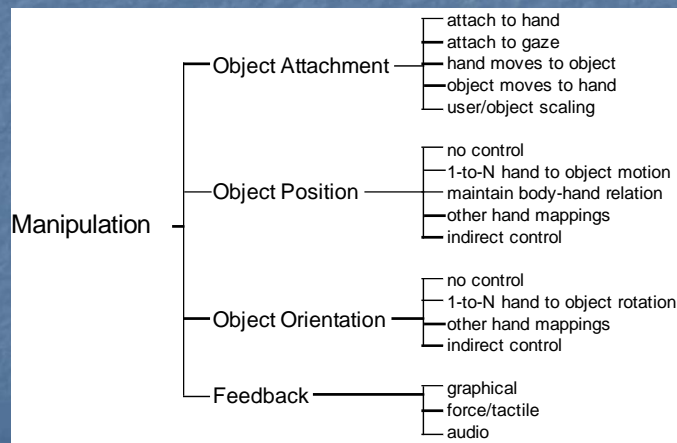

## 3D Selection and Manipulation Techniques

- Pointing
  - ray-casting
  - two-handed pointing
  - flashlight & aperture
  - image plane
- Direct manipulation
  - simple virtual hand
  - Go-Go
  - WIM
- Hybrids
  - Homer
  - Scaled-World Grab
  - Voodoo Dolls




Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Pointing – Ray-Casting

- User points at objects with virtual ray
- Ray defines and visualizes pointing direction

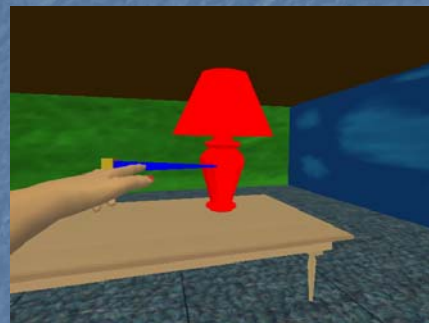

$$\mathbf{p}(\alpha) = \mathbf{h} + \alpha \cdot \vec{\mathbf{p}}$$

where  $0 < \alpha < \infty$

$\mathbf{h}$  = 3D position of virtual hand

$\vec{\mathbf{p}}$  = ray attached to  $\mathbf{h}$

Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Pointing – Two-Handed Pointing


- Ray casting with 2 hands
- More control
  - distance between hands controls length
  - twisting curves pointer

$$\mathbf{p}(\alpha) = \mathbf{h}_l + \alpha \cdot (\mathbf{h}_r - \mathbf{h}_l)$$

where  $0 < \alpha < \infty$

$\mathbf{h}_l$  = 3D position of left hand

$\mathbf{h}_r$  = 3D position of right hand



Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Pointing – Flashlight and Aperture



- Flashlight – soft selection technique
  - does not need precision
  - conic volume constant
- Aperture – extension to Flashlight
  - adjustable volume

$$\mathbf{p}(\alpha) = \mathbf{e} + \alpha \cdot (\mathbf{h} - \mathbf{e})$$

where  $0 < \alpha < \infty$

$\mathbf{h}$  = 3D position of hand

$\mathbf{e}$  = 3D coordinates of viewport



Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.



## Pointing – Image Plane Family


- Requires only 2 DOF
  - selection based on 2D projections
  - virtual image plane in front of user




Framing



Lifting Palms



Head-Crusher



Sticky Finger




Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Direct Manipulation – Virtual Hand

- Select and manipulate directly with hands
- Hand represented as 3D cursor
- Intersection between cursor and object indicates selection



$$\mathbf{p}_v = \alpha \cdot \mathbf{p}_r, \mathbf{R}_v = \mathbf{R}_r$$

$\mathbf{p}_r, \mathbf{R}_r$  = position and orientation of real hand

$\mathbf{p}_v, \mathbf{R}_v$  = position and orientation of hand in VE

$\alpha$  = a scaling factor



Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Direction Manipulation – Go-Go

- Arm-extension technique
- Like simple v. hand, touch objects to select them
- Non-linear mapping between physical and virtual hand position
- Local and distant regions

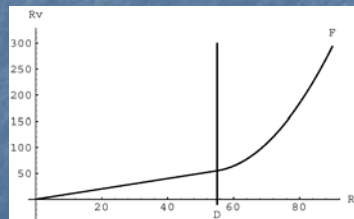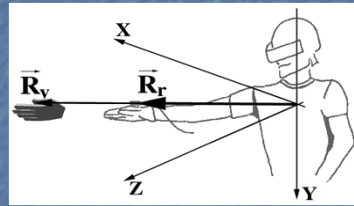

$$r_v = F(r_r) = \begin{cases} r_r & \text{if } r_r \leq D \\ r_r + \alpha(r_r - D)^2 & \text{otherwise} \end{cases}$$

where  $r_r$  = length of  $\vec{R}_r$

$r_v$  = length of  $\vec{R}_v$

$D, \alpha$  are constants



Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Direct Manipulation – WIM

- “Dollhouse” world held in user’s hand
- Miniature objects can be manipulated directly
- Moving miniature objects affects full-scale objects
- Can also be used for navigation



Spring 2014


CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Hybrids – HOMER

Hand-Centered  
Object  
Manipulation  
Extending  
Ray-Casting

- Select: ray-casting
- Manipulate: hand

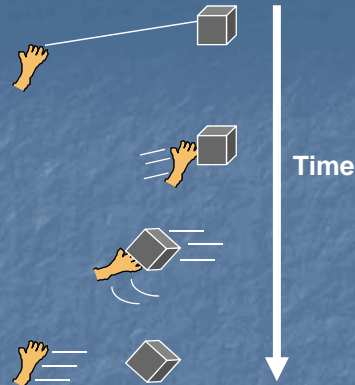

Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## HOMER Implementation

- Requires torso position  $t$
- Upon selection, detach virtual hand from tracker, move v. hand to object position in world CS, and attach object to v. hand (w/out moving object)
- Get physical hand position  $h$  and distance  $d_h = \text{dist}(h, t)$
- Get object position  $o$  and distance  $d_o = \text{dist}(o, t)$

Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## HOMER Implementation (cont.)

- Each frame:
  - Copy hand tracker matrix to v. hand matrix (to set orientation)
  - Get physical hand position  $h_{curr}$  and distance:  
 $d_{h-curr} = dist(h_{curr}, t)$
  - V. hand distance  $d_{vh} = d_{h-curr} \times \left( \frac{d_o}{d_h} \right)$
  - Normalize torso-hand vector  $th_{curr} = \frac{h_{curr} - t}{\|h_{curr} - t\|}$
  - V. hand position  $vh = t + d_{vh} * (th_{curr})$


Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Hybrids – Scaled-World Grab Technique

- Often used w/ occlusion
- At selection, scale user up (or world down) so that v. hand is actually touching selected object
- User doesn't notice a change in the image until he moves

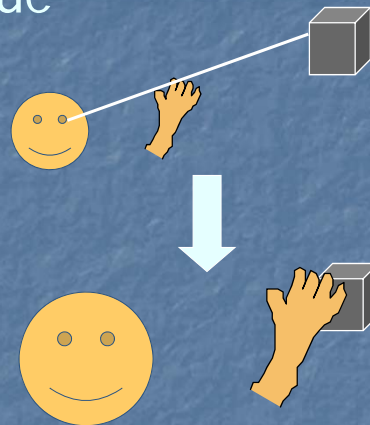

Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Scaled-World Grab Implementation

- At selection:
  - Get world CS distance from eye to hand  $d_{eh}$
  - Get world CS distance from eye to object  $d_{eo}$
  - Scale user (entire user subtree) uniformly by  $d_{eo} / d_{eh}$
  - Ensure that eye remains in same position
  - Attach selected object to v. hand (w/out moving object)
- At release:
  - Re-attach object to world (w/out moving object)
  - Scale user uniformly by  $d_{eh} / d_{eo}$
  - Ensure that eye remains in same position


Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Hybrids – Voodoo Dolls

- Two handed technique
- Builds upon image plane and WIM techniques
- Creates copies of objects (dolls) for manipulation
- Non-dominant hand – stationary frame of reference
- Dominant hand – defines position and orientation

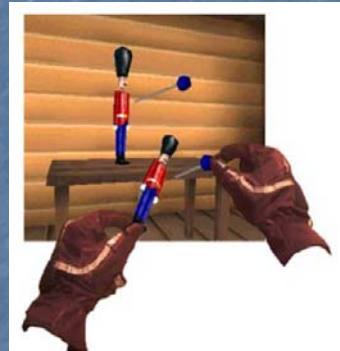

Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Isomorphic vs. Non-Isomorphic Philosophies

- Human-Machine interaction
  - input device
  - display device
  - transfer function (control to display mapping)
- Isomorphic – one-to-one mapping
- Non-isomorphic – scaled linear/non-linear mapping

Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Non-Isomorphic 3D Spatial Rotation

- Important advantages
  - manual control constrained by human anatomy
  - more effective use of limited tracking range (i.e. vision-based tracking)
  - additional tools for fine tuning interaction techniques
- Questions
  - faster?
  - more accurate?

Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Rotational Space

- Rotations in 3D space are a little tricky
  - do not follow laws of Euclidian geometry
- Space of rotations is not a vector space
- Represented as a closed and curved surface
  - 4D sphere or manifold
- Quaternions provide a tool for describing this surface

## Quaternions

- Four-dimensional vector  $(\mathbf{v}, w)$  where  $\mathbf{v}$  is a 3D vector and  $w$  is a real number
- A quaternion of unit length can be used to represent a single rotation about a unit axis  $\hat{u}$

and angle  $\theta$  as

$$q = \left( \sin\left(\frac{\theta}{2}\hat{u}\right), \cos\left(\frac{\theta}{2}\right) \right) = e^{\frac{\theta}{2}\hat{u}}$$

## Linear 0<sup>th</sup> Order 3D Rotation

- Let  $q_c$  be the orientation of the input device and  $q_d$  be the displayed orientation then

$$(1) \quad q_c = (\sin(\frac{\theta_c}{2} \hat{u}_c), \cos(\frac{\theta_c}{2})) = e^{\frac{\theta_c}{2} \hat{u}_c}$$

$$(2) \quad q_d = (\sin(\frac{k\theta_c}{2} \hat{u}_c), \cos(\frac{k\theta_c}{2})) = e^{\frac{k\theta_c}{2} \hat{u}_c} = q_c^k$$

- Final equations w.r.t. identity or reference orientation  $q_o$  are

$$(3) \quad q_q = q_c^k \quad (4) \quad q_d = (q_c q_o^{-1})^k q_o, \quad k = \text{CD gain coefficient}$$

## Non-Linear 0<sup>th</sup> Order 3D Rotation

- Consider

$$(3) \quad q_d = q_c^k \quad (4) \quad q_d = (q_c q_o^{-1})^k q_o$$

- Let  $k$  be a non-linear function as in

$$\omega = 2 \arccos(q_c \cdot q_o) \quad \text{or} \quad \omega = 2 \arccos(w)$$

$$k = F(\omega) = \begin{cases} 1 & \text{if } \omega < \omega_o \\ f(\omega) = 1 + c(\omega - \omega_o)^2 & \text{otherwise} \end{cases}$$

where  $c$  is a coefficient and  $\omega_o$  is the threshold angle



## Design Considerations

- Absolute mapping – taken on *i-th* cycle of the simulation loop

$$q_{d_i} = q_{c_i}^k$$

- Relative mapping – taken between the *i-th* and *i-1th* cycle of the simulation loop

$$q_{d_i} = (q_{c_i} q_{c_{i-1}}^{-1})^k q_{d_{i-1}}$$

## Absolute Non-Isomorphic Mapping

- Generally do not preserve directional compliance
- Strictly preserves nulling compliance

## Relative Non-Isomorphic Mapping

- Always maintain directional compliance
- Do not generally preserve nulling compliance

## Amplified Non-Linear Rotation for VE Navigation (1)

- Users expect the virtual world to exist in any direction
  - 3-walled Cave does not allow this
  - adapt expected UI to work in restricted environment
- Amplified rotation allows users to see a full 360 degrees in a 3-walled display
- A number of approaches were tested
  - important to take cybersickness into account

## Amplified Non-Linear Rotation for VE Navigation (2)

- Apply a non-linear mapping function to the user's waist orientation  $\theta$  and his or her distance  $d$  from the back of the Cave
- Calculate the rotation factor using a scaled 2D Gaussian function

$$\phi = f(\theta, d) = \frac{1}{\sqrt{2\pi\sigma_1}} e^{-\frac{(|\theta| - \pi(1-d/L))^2}{2\sigma_2^2}}$$


- The new viewing angle is  $\theta_{new} = \theta(1 - \phi)$

Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Amplified Non-Linear Rotation for VE Navigation (3)

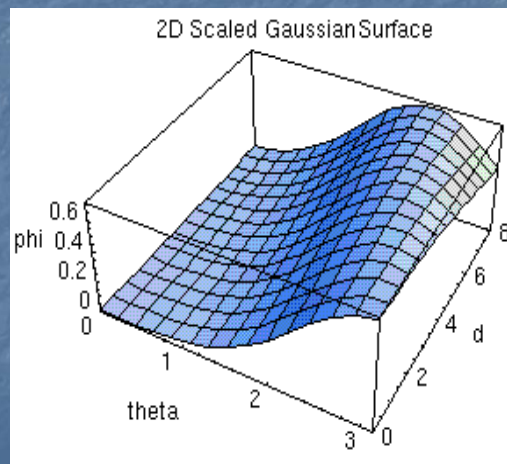

$$\sigma_1 = 0.57$$

$$\sigma_2 = 0.85$$

$$L = 30$$

$$\mu = \pi$$

Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Non-Linear Translation for VE Navigation (1)

- Users lean about the waist to move small to medium distances
  - users can lean and look in different directions
- Users can also lean to translate a floor-based interactive world in miniature (WIM)
  - Step WIM must be active
  - user's gaze must be 25 degrees below horizontal

Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Non-Linear Translation for VE Navigation (2)

- Leaning vector  $\vec{L}_R$  is the projection of the vector between the waist and the head onto the floor
  - gives direction and raw magnitude components
- Navigation speed is dependent on the user's physical location
  - Leaning sensitivity increases close to a boundary
- Linear function -  $L_T = a \cdot D_{\min} + b$
- Mapped velocity -  $v = \|\vec{L}_R\| - L_T$

Spring 2014

CAP6121 – 3D User Interfaces for Games and Virtual Reality

©Joseph J. LaViola Jr.

## Non-Linear Translation for VE Navigation (3)

- Navigation speed is also dependent on the user's head orientation with respect to the vertical axis
  - especially useful when translating the floor-based WIM
- Mapping is done with a scaled exponential function

$$F = \alpha \cdot e^{-\beta |\vec{H} \cdot \vec{V}_{up}|}$$

- Final leaning velocity is  $v_{final} = F \cdot v$

## Next Class

- Navigation – Travel
- Readings
  - 3DUI Book – Chapter 5