3D User Interface Hardware

Lecture #4: Visual Displays

Spring 2008

Joseph J. LaViola Jr.

Interaction Workflow

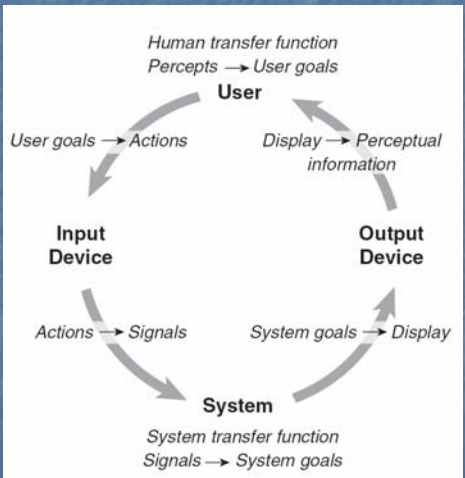

Introduction To Displays

- *Display*: device which presents perceptual information
- Often ‘display’ used to mean ‘visual display’
- Goal: display devices which accurately represent perceptions in simulated world

Lecture Outline

- Visual System
- Depth Cues
- Visual Display Characteristics
- Visual Display Examples
  - monitors
  - surround screen displays
  - workbenches
  - head mounted displays
  - arm-mounted displays
  - virtual retinal displays
  - autostereoscopic displays

Vision

- Stimulus: light of wavelengths ~350-750 nm

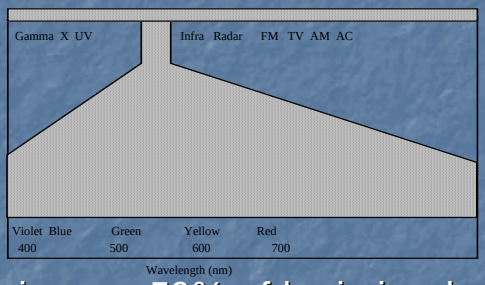

- Visual dominance: 50% of brain involved in processing!

Eye Physiology

- Camera metaphor:
  - lens (can change)
  - film (retina)
  - amount of exposure (pupil)



Retina

- Photoreceptors: rods & cones
- Distinction of function
  - rods: periphery, motion, B&W, sensitivity
  - cones: fovea, static, color, acuity

Rod/cone Distribution

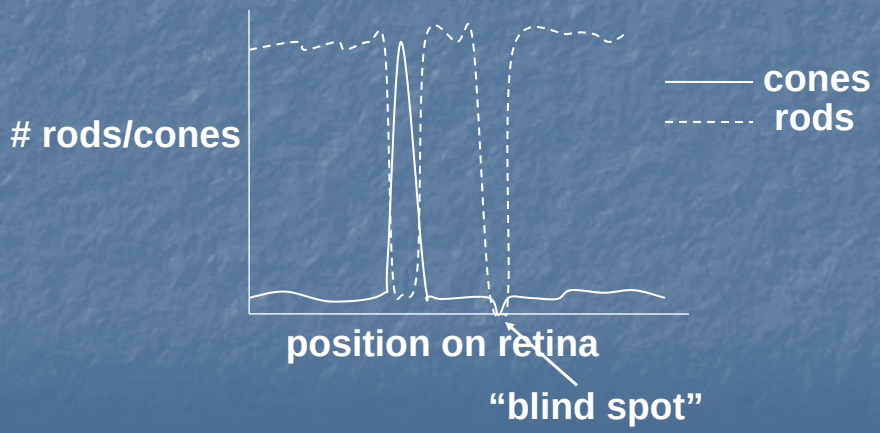

Depth Cues – How Do We See 3D?

- Monocular/static cues
- Occulomotor cues
- Motion Parallax
- Binocular Disparity and Stereopsis

Monocular/Static Cues

- Relative Size

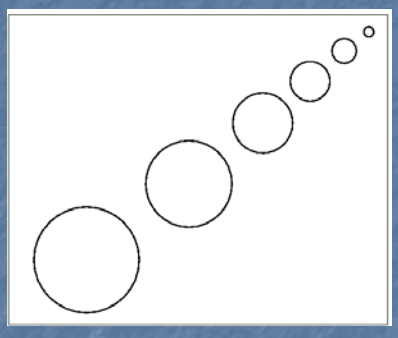

- Height relative to horizon

Monocular/Static Cues

- Occlusion and Linear Perspective

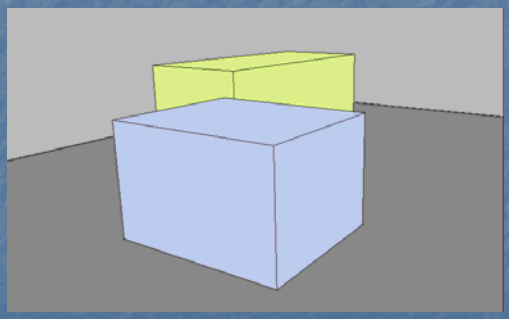

Monocular/Static Cues

- Shading, Lighting, and Texture

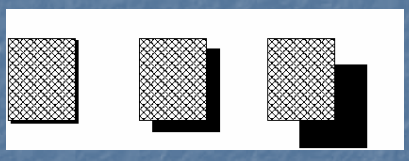

Oculomotor Cues

- Accommodation – physical stretching and relaxing of eye lens
- Convergence – rotation of viewer's eyes so images can be fused together at varying distances



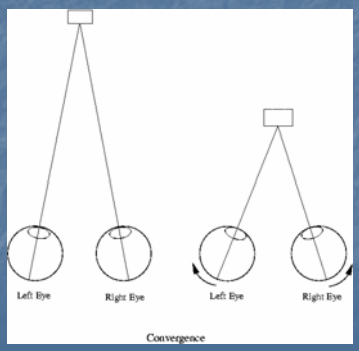

Motion Parallax

- Stationary viewer vs. moving viewer

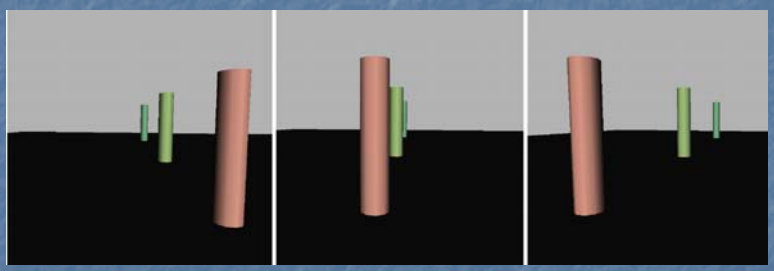

Binocular Disparity and Stereopsis

- Each eye gets a slightly different image
- Only effective within a few feet of viewer
- Many implementation schemes



Accommodation-Convergence Mismatch

- Standard stereo displays confuse the brain based on oculomotor cues

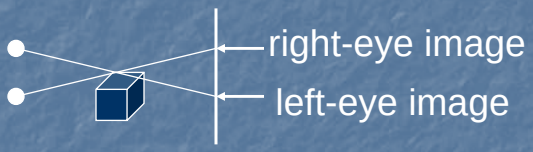

- Only “true 3D” displays can provide these correctly

Visual Display Characteristics

- Field of View (FOV) and Field of Regard (FOR)
  - FOR – amount of physical space surrounding viewer in which visual images appear
  - FOV – maximum visual angle seen instantaneously
- Spatial Resolution
  - number of pixels and screen size
- Screen Geometry
  - rectangular, hemispherical, etc...
- Light Transfer Mechanism
  - front projection, rear projection, laser light, etc...
- Refresh Rate
  - not the same as frame rate
- Ergonomics

Stereo Monitor

- Ordinary workstation equipped with emitter and shutter glasses

Stereo Monitor – Advantages

- Least expensive in terms of additional hardware over other output devices
- Allows usage of virtually any input device
- Good resolution
- User can take advantage of keyboard and mouse

Stereo Monitor – Disadvantages

- Not very immersive
- User really cannot move around
- Does not take advantage of peripheral vision
- Stereo can be problematic
- Occlusion from physical objects can be problematic

Surround Screen VE (1)

- Has 3 to 6 large screens
- Puts user in a room for visual immersion
- Usually driven by a single or group of powerful graphics engines





Surround Screen VE (2)

Surround Screen VE (3)

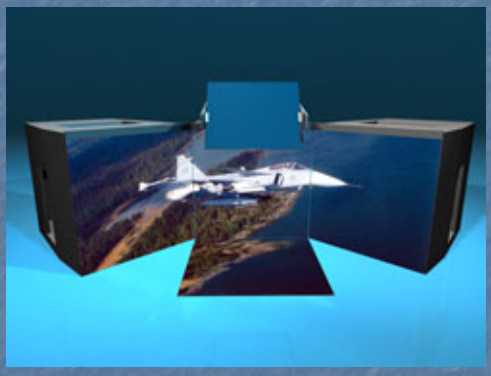



SSVE – Advantages

- Provides high resolution and large FOV
- User only needs a pair of light weight shutter glasses for stereo viewing
- User has freedom to move about the device
- Environment is not evasive
- Real and virtual objects can be mixed in the environment
- A group of people can inhabit the space simultaneously

SSVE – Disadvantages

- Very expensive (6-7 figures)
- Requires a large amount of physical space
- Projector calibration must be maintained
- No more that two users can be head tracked
- Stereo viewing can be problematic
- Physical objects can get in the way of graphical objects

SSVE – Interface Design

- Do not need to represent physical objects (i.e. hands) as graphical objects
- Can take advantage of the user's peripheral vision
- Do not want the user to get too close to the screens
- Developer can take advantage of the space for using physical props (i.e. car, motion platform)

Workbenches and Variants (1)

- Similar to SSVE but one display (two at most)
- Can be a desk or a large single display (i.e. PowerWall)
- Traditionally a table top metaphor

Workbenches and Variants (2)

Workbenches and Variants (3)

Workbenches – Advantages

- High resolution
- For certain applications, makes for an intuitive display
- Can be shared by several users

Workbenches – Disadvantages

- Limited movement
- At most two users can be head tracked
- No surrounding screens
- Physical objects can get in the way of graphical objects
- Stereo can be problematic

Workbenches – Interface Design

- Ergonomics are important especially when designing interfaces for table displays
- User can take advantage of direct pen-based input if display surface permits
- No need to make graphical representations of physical objects

Head Mounted Displays

- Device has either two CRT or LCD screens plus special optics in front of the users eyes
- User cannot naturally see the real world
- Provides a stereoscopic view that moves relative to the user

HMDs – Advantages

- Provides an immersive experience by blocking out the real world
- Fairly easy to set up
- Does not restrict user from moving around in the real world
- Average quality HMD is relatively inexpensive
- Can achieve good stereo quality

HMDs – Disadvantages

- Average quality HMDs have poor resolution and field of view (FOV)
- Does not take advantage of peripheral vision
- Isolation and fear of real world events
- Good quality devices cost in the 100,000 dollar range
- Heavy and do not fit well

HMDs – Interface Design

- Physical objects require a graphical representation
- Limits the types of input devices that can be used

Arm Mounted Display (BOOM)

- Like a HMD but mounted on an articulated arm
- Mostly use CRT technology
- Not really used anymore

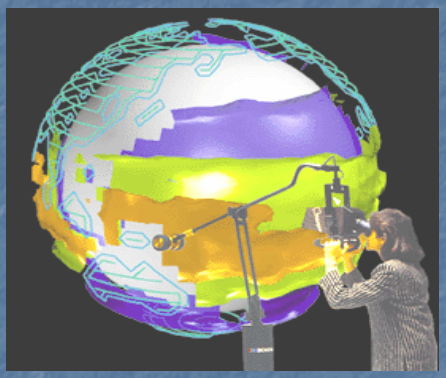

BOOM – Advantages

- Provides better resolution than HMDs and generally a higher FOV
- Light weight relative to the user
- Excellent tracking with minimal lag
- Easy to set up and switch users
- Good stereo quality

BOOM – Disadvantages

- Limited user movement
- Like looking through binoculars
- Does not take advantage of peripheral vision
- Requires the user to hold onto the BOOM for control

BOOM – Interface Design

- Must have at least one hand on the device which limits two-handed interaction
- Physical objects require graphical representation

Virtual Retinal Displays (VRD)

- Scans images directly onto the retina
- Invented at the HIT Lab in 1991
- Used for both virtual and augmented reality
- Commercially being developed at Microvision, Inc.

VRDs – Advantages

- Lightweight relative to the user
- Ability for high resolution and FOV
- Potential for complete visual immersion
- Can achieve good stereo quality

VRDs – Disadvantages

- Currently has low resolution and FOV is small
- Displays are currently monochrome

VRDs – Interface Design

- Avenue of research
- Questions arise about eye movement

AutoStereoscopic Displays

- Lenticular
- Volumetric
- Holographic

Which Visual Display to Use?

- Consider lists of pros and cons
- Consider depth cues supported
- Consider level of visual immersion
- But this is a very hard question to answer empirically

Next Class

- Auditory and Haptic Displays
- Readings
  - 3DUI Book – Chapter 3, pages 29-59