

Pen-Based Gestural User Interfaces

Lecture #6: Gestures
Joseph J. LaViola Jr.
Fall 2010

Fall 2010

CAP 6105 – Pen-Based User Interfaces

©Joseph J. LaViola Jr.

What is a Pen Gesture?

- Simple ink stroke or strokes to convey an idea
 - fast to perform
 - easy to remember
- Typically disappear after they are recognized
- Supports in-band interaction



Fall 2010

CAP 6105 – Pen-Based User Interfaces

©Joseph J. LaViola Jr.

Gesture Types

- Single stroke
- Multi-stroke
 - compound gestures
 - punctuated gestures
- Trade-off in recognition between single and multiple stroke gestures
- Used in
 - modeling
 - command languages
 - invoking interface widgets



Single stroke gesture



Multi-stroke gesture


Fall 2010

CAP 6105 – Pen-Based User Interfaces

©Joseph J. LaViola Jr.

Gestures in Modeling

- Used in 2D/3D object modeling
- Distinction between sketch-based modeling and gestures in modeling
- Used to
 - create geometry
 - manipulate geometry
 - guidance for computational algorithms

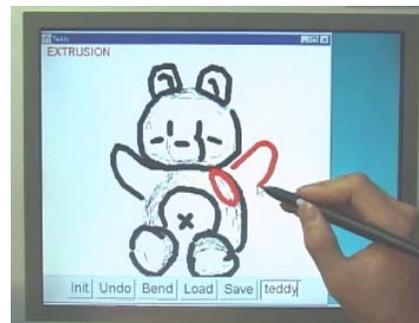

www-ui.is.s.u-tokyo.ac.jp/~takeo/research/teddy/teddy.htm


Fall 2010

CAP 6105 – Pen-Based User Interfaces

©Joseph J. LaViola Jr.

SKETCH


- Seminal work by Zeleznik et al. (1996)
- Conceptual modeling
- Uses simple lines and curves to build geometric primitives
 - cubes, cylinders, pyramids, etc...
- No machine learning-based recognition used
 - simple FSA
- Does make use of modifier keys



SKETCH Gesture Set (1)

		cube				Dragging objects
						Scaling objects
		cylinder				
						Copying objects
		cone				
						freehand drawing
		truncated cone				
						scaling along an axis
		sphere				
						freehand drawing
		duct				

SKETCH Gesture Set (2)

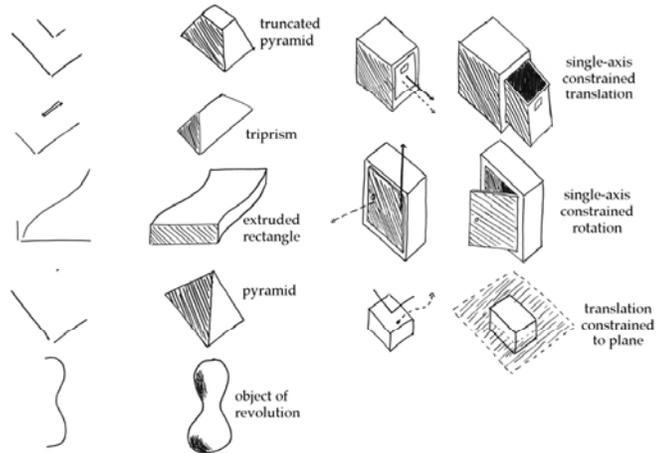

Fall 2010

CAP 6105 – Pen-Based User Interfaces

©Joseph J. LaViola Jr.

Teddy

- Seminal work by Igarashi et al. (1999)
 - did for organic modeling what Zeleznik et al. did for primitive-based modeling
- Supports
 - Object creation
 - Cutting
 - Extrusion
 - Smoothing
- No machine learning used
 - Simple FSA and geometric construction techniques



Smooth Teddy




Fall 2010

CAP 6105 – Pen-Based User Interfaces

©Joseph J. LaViola Jr.

Surface/Mesh Editing

- Fine line between sketching and gestures
- Uses simple gesture as input to a surface editing algorithm
- This type of approach has been used for image processing as well
 - see work of Salesin

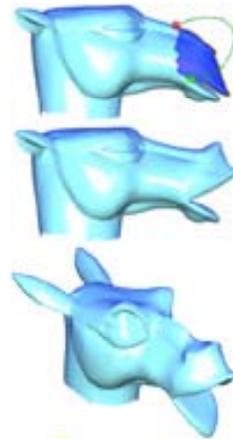


Nealen et al. (2005)

Gestures as Command Languages

- Gestural commands
 - replace traditional WIMP user interfaces
 - also used to invoke interface widgets
- Notion of in-band gestures
 - invoking commands and operations at the location of interaction
 - contrasts with having to move to top/side of the screen to press a button or find a menu item
- Used in
 - entering text
 - text editing
 - note taking
 - mathematical apps
 - etc...


Graffiti

- Language for entering text
- Maps to keyboard
- Used with Palm Pilot
- Single stroke language
 - Has prefix for some symbols
- Takes a while to learn

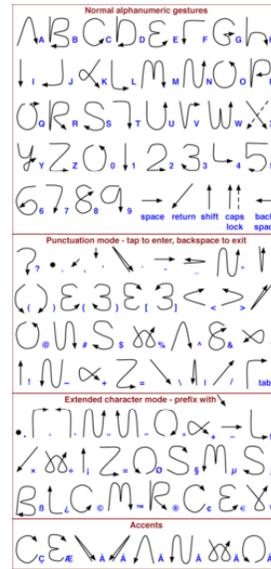

Text Editing


- Example of a gesture set taken from real world and developed for pen computers
- Natural connection between pencil and paper and computer

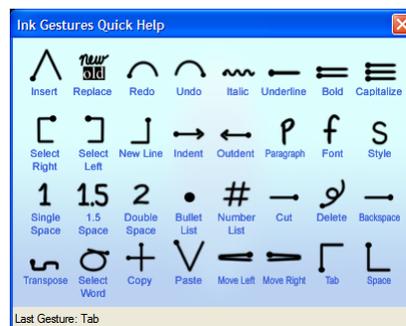

www.jumpingminds.com

MathPad²






- Simple gesture set for
 - invoking operations
 - manipulating ink
- Uses notion of punctuated gestures
 - multi-stroke (gesture + punctuation)
 - makes use of context
- Why?
 - reduce number of gestures
 - overload appropriate gestures
 - reduce conflicts



MathPad² Gesture Set (1)

Gesture	Result	Description
		Lasso and tap to recognize an expression
		Scribble and tap to delete ink
		Creates a graph, line starts in recognized math, no cusps or intersections
		Line through math and click on drawing makes association, Release makes rotation point
		Solves equation, includes simultaneous and ordinary differential equations
		Evaluate an expression, includes intergrals, derivatives, summations, etc.

MathPad² Gesture Set (2)

Gesture	Result	Description
		Makes implicit association using label family 'P'
		Makes implicit association with explicit tap on object
		Implicit angle association and rectification
		Nail two drawing elements by small circle and tap
		Group strokes
		Lasso and drag symbol to change position

Fall 2010

CAP 6105 – Pen-Based User Interfaces

©Joseph J. LaViola Jr.

Fluid Inking (Zelevnik and Miller 2006)

- Approach to augment free-form inking with gestures (collection of techniques)
- Guidelines
 - hardware impartiality (no buttons)
 - performability (minimal targeting)
 - extensibility
 - discoverability
- Uses
 - terminal punctuation
 - flicks



Gestures in top row, regular ink in bottom row.



Flick, mnemonic flick, ink

Gesture Class	Context	Gesture	Terminal	Example
Mnemonic flick	flick (∟)	letter		<i>s</i> saves the file
Punctuated:				
self-contained		lasso (⊃), scribble (##), or crop (⊥)	tap or pause	## deletes ink under it
mnemonic	lasso (⊃)	letter or scribble (##)	tap or pause	⊃ copies ink contained in the lasso
mimetic	lasso (⊃)	stroke hook (∟)	tap or pause	⊃ applies NE menu option to lasso contents

Fall 2010

CAP 6105 – Pen-Based User Interfaces


©Joseph J. LaViola Jr.

Recognizing Gestures

- FSA's and simple primitive operators
 - conditionals and saving state from one event trigger to another
 - Operators can be features
 - same features used in machine learning!
 - features must be excellent discriminators
- Machine learning techniques
 - SVMs, K-nearest neighbor, AdaBoost
 - more on this soon!

Anatomy of a Gesture

Detecting and equal sign



Note that as the gesture set increases the more tests you typically have to employ to avoid conflicts.

Input: Strokes s_{i-1} and s_{i-2} , a bounding box threshold ϵ_{box} , and a line difference threshold ϵ_{diff} .

Output: True or false.

DETECTEQUALSIGN($s_{i-1}, s_{i-2}, \epsilon_{box}, \epsilon_{diff}$)

(1) $P \leftarrow Points(s_{i-1})$

(2) $Q \leftarrow Points(s_{i-2})$

(3) $b_1 \leftarrow BoundingBox(s_{i-1})$

(4) $b_2 \leftarrow BoundingBox(s_{i-2})$

(5) $slen_1 \leftarrow \sum_{i=2}^n \|P_i - P_{i-1}\|$

(6) $slen_2 \leftarrow \sum_{i=2}^n \|Q_i - Q_{i-1}\|$

(7) **if** $slen_1 > \frac{\epsilon_{box} \sqrt{Width(b_1)^2 + Height(b_1)^2}}{\epsilon_{box} \sqrt{Width(b_2)^2 + Height(b_2)^2}}$ **or** $slen_2 >$

(8) **return** false

(9) **if** $Width(b_1) < Height(b_1)$ **or** $Width(b_2) < Height(b_2)$

(10) **return** false

(11) $diff_1 = |X(P_1) - X(Q_1)|$

(12) $diff_2 = |X(P_n) - X(Q_n)|$

(13) **if** $LineOverlap(P_1, P_n, Q_1, Q_n)$ **and** $diff_1 < \epsilon_{diff}$ **and** $diff_2 < \epsilon_{diff}$


(14) **return** true

(15) **else**

(16) **return** false

Learning Gestures

- How many gestures is too many?
- Learning strategies
 - Simple tutorials/manuals
 - Gesture practice tools
 - color coding (useful for multi-stroke gestures)
 - Showing gestures through animations
- Techniques not proven – open research area

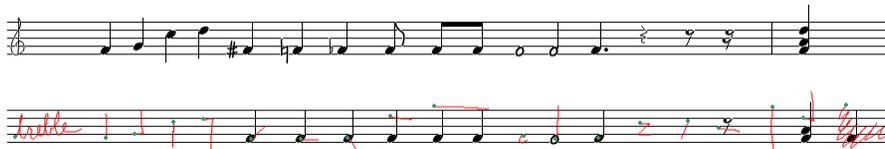

Music NotePad gestural tutorial system

Readings

- Zeleznik, R., K. Herndon, and J. Hughes. SKETCH: An Interface for Sketching 3D Scenes. *Proceedings of SIGGRAPH'96*, ACM Press, 163-170, 1996.
- Igarashi, T., S. Matsuoka, and H. Tanaka. Teddy: A Sketching Interface for 3D Freeform Design. *Proceedings of SIGGRAPH'99*, ACM Press, 409-416, 1999.
- Robert Zeleznik and Timothy Miller. Fluid Inking: Augmenting the Medium of Free-Form Inking with Gestures. In *Graphics Interface*. Canadian Human-Computer Communications Society, p 155-162, June 2006.