

# CNT 4714: Enterprise Computing Fall 2011

## Introduction to Servlet Technology– Part 3

Instructor :      Dr. Mark Llewellyn  
                         markl@cs.ucf.edu  
                         HEC 236, 407-823-2790  
                         <http://www.cs.ucf.edu/courses/cnt4714/fall2011>

Department of Electrical Engineering and Computer Science  
Computer Science Division  
University of Central Florida



# More XHTML Document Details

- Let's look a bit closer at what happens in our servlet as it executes. (See the servlet code on page 22 of servlets-part 2 notes.)

```
protected void doGet( HttpServletRequest request,  
                    HttpServletResponse response )  
    throws ServletException, IOException {
```

- This line begins the overridden method `doGet` to respond to the get requests. In this case, the `HttpServletRequest` object parameter represents the client's request and the `HttpServletResponse` object parameter represents the server's response to the client.
- If method `doGet` is unable to handle a client's request, it throws an exception of type `javax.servlet.ServletException`. If `doGet` encounters an error during stream processing (when reading from the client or writing to the client), it throws a `java.io.IOException`.



# More XHTML Document Details (cont.)

```
response.setContentType( "text/html" );  
    PrintWriter out = response.getWriter();
```

- The first line above uses the response object's `setContentType` method to specify the content type of the document to be sent as the response to the client. This enables the client browser to understand and handle the content it receives from the server. The content type is also referred to as the **MIME (Multipurpose Internet Mail Extension)** type of the data. In this servlet, the content type is `text/html` to indicate to the browser that the response is an XHTML document.
- The second line above uses the response object's `getWriter` method to obtain a reference to the `PrintWriter` object that enables the servlet to send content to the client. If the response is binary data, like an image, method `getOutputStream` would be used to obtain a reference to a `ServletOutputStream` object.



# More XHTML Document Details (cont.)

```
out.println( "<?xml version = \"1.0\"?>" );
out.println( "<!DOCTYPE html PUBLIC \"- //W3C//DTD " +
    "XHTML 1.0 Strict//EN\" \"http://www.w3.org\" +
    \"/TR/xhtml1/DTD/xhtml1-strict.dtd\">" );
out.println("<html xmlns =
    \"http://www.w3.org/1999/xhtml\">" );
// head section of document
    out.println( "<head>" );
    out.println( "<title>Welcome to Servlets!</title>" );
    out.println( "</head>" );
// body section of document
    out.println( "<body>" );
    out.println( "<h1>Welcome To The World Of Servlet
        Technology!</h1>" );
    out.println( "</body>" );
// end XHTML document
    out.println( "</html>" );
```

- These lines create the XHTML document shown in the box on page 22 of *servlets-part 2 notes*.



# Deploying a Web Application

- Servlets, JSPs and their supporting files are deployed as part of a Web application.
- Web applications are deployed in the `webapps` subdirectory of Tomcat.
- A Web application has a well-known directory structure in which all the files that are part of the application reside.
- This directory structure is created by the server administrator in the `webapps` directory, or the entire directory structure can be archived in a Web application archive file known as a WAR file (ending with a `.war` file extension – `war` stands for web application archive) which is placed in the `webapps` directory.



# Deploying a Web Application (cont.)

- The Web application directory structure contains a context root, which is the top-level directory for an entire Web application along with several subdirectories as shown below:

**context root** – The root directory for the Web application. All the JSPs, HTML documents, servlets and supporting files such as images and class files reside in this directory or one of the subdirectories. The name of this directory is specified by the Web application creator. To provide structure in a Web application, subdirectories can be placed in the context root. It is common to see an images subdirectory, for example.

**WEB-INF** – This subdirectory contains the Web application deployment descriptor **web.xml**.

**WEB-INF/classes** – This subdirectory contains the servlet class files and other supporting class files used in a Web application. If the classes are part of a package, the complete package directory structure would begin here.

**WEB-INF/lib** – This subdirectory contains Java archive (JAR) files. The JAR files can contain servlet class files and other supporting class files.



# Deploying a Web Application (cont.)

- As we mentioned in the previous section of notes, Tomcat will default to a welcome page which is specified in the `web.xml` file. The standard default values were shown on page 9 in the previous set of notes.
- If you do not create one of these files, the default page for a web application is not very appealing.



# Deploying a Web Application (cont.)

- Since we would like our clients to see something more appropriate than the default web application page, you should create your own web application welcome page.
- This page is simply an HTML page and I've created one for the web applications we create from this point forward. I've simply modeled the page using our course web page as a template. The code for this page is included on the course code page if you want to use it, but feel free to design your own.
- I'll utilize this page as a home page for all of our servlets and JSPs that we'll see later in the course.
- I've also created a new web application named CNT4714 that we'll use for our future servlets and JSPs.
- Now, when the client enters the URL, <http://localhost:8080/CNT4714> they will see the home page shown in the next slide.





CNT 4714 - Fall 2011 - Windows Internet Explorer

http://localhost:8080/CNT4714/

File Edit View Favorites Tools Help

★ Favorites | ★ Suggested Sites | Web Slice Gallery

CNT 4714 - Fall 2011

Home RSS Print Page Safety Tools



# CNT 4714 - Enterprise Computing Fall 2011

---

Instructor: [Dr. Mark Llewellyn](#)  
HEC 236  
(407) 823-2790  
Email to: [markl@cs.ucf.edu](mailto:markl@cs.ucf.edu)

---

## Welcome To The CNT 4714 Servlet Home Page

---

**SERVLET HOME PAGE**

Click any of the links below to directly invoke the corresponding servlet

[Click here to invoke a simple Welcome Servlet](#)


[Click here to invoke a more personal Welcome Servlet](#)

Local intranet | Protected Mode: Off | 90%



# Deploying a Web Application (cont.)

- The Web application directory structure that I set up for the CNT4714 web application looks like the following:

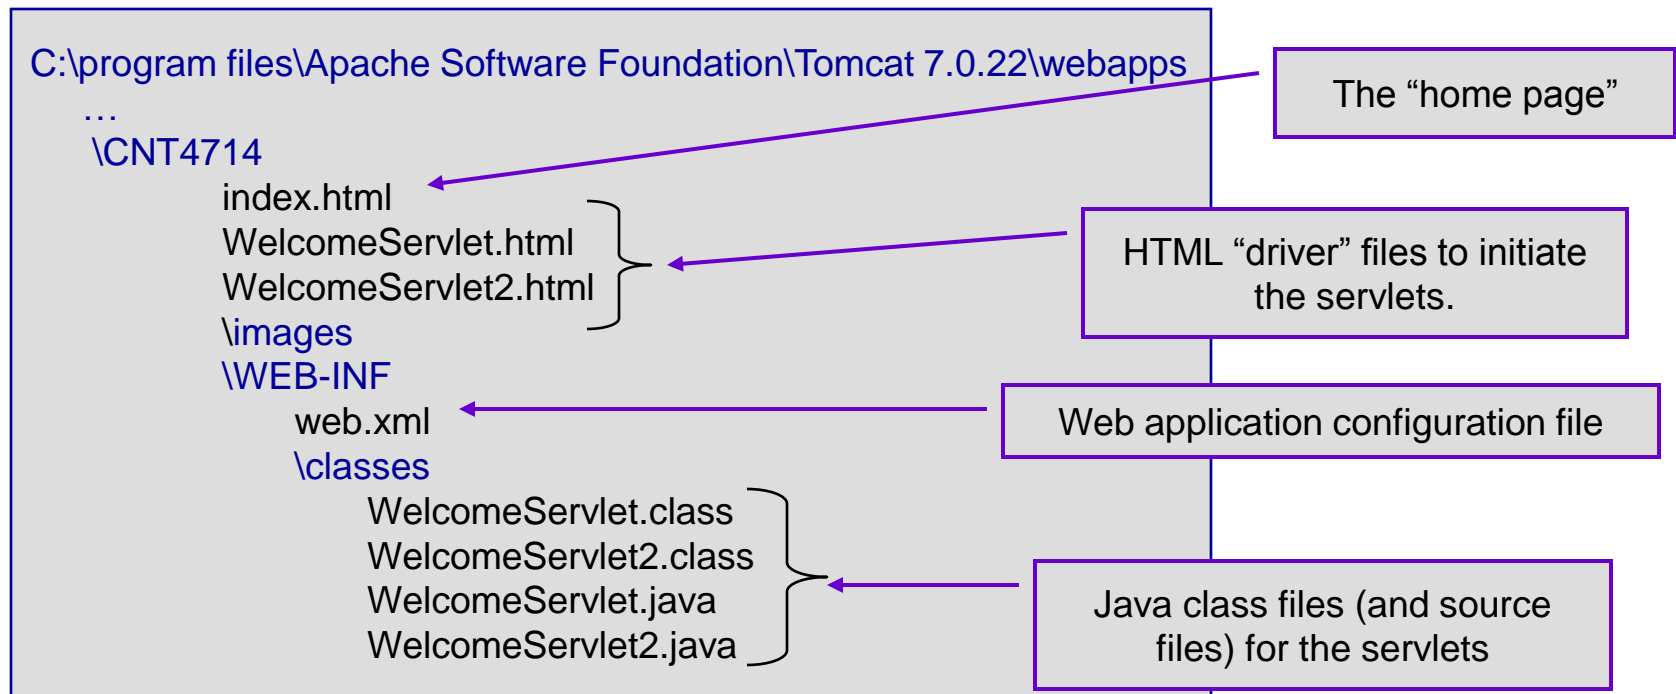

# A Closer Look at the `web.xml` File

```
<web-app xmlns="http://java.sun.com/xml/ns/j2ee"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://java.sun.com/xml/ns/j2ee
    http://java.sun.com/xml/ns/j2ee/web-app_2_4.xsd"
  version="2.4">
```

```
<!-- General description of your Web application -->
```

```
<display-name>
  Servlet Technology
</display-name>
```

```
<description>
  This is the Web application in which we will
  demonstrate our JSP and Servlet examples.
</description>
```

The `web-app` element defines the configuration of each servlet in the Web application and the servlet mapping for each servlet.

The `display-name` element specifies a name which can be displayed to the server administrator on which the Web application is installed.

The `description` element specifies a description of the Web application that can also be displayed to the server administrator.



# A Closer Look at the `web.xml` File

```
<!-- Servlet definitions -->
```

```
<servlet>  
  <servlet-name>welcome1</servlet-name>
```

Element `servlet` describes a servlet. There is one of these for each servlet in the Web application. Element `servlet-name` is the name chosen for the servlet.

```
  <description>  
    A simple welcome servlet that handles an HTTP get request.  
  </description>
```

Element `description` describes the servlet and can be displayed to the server administrator.

```
  <servlet-class>  
    WelcomeServlet  
  </servlet-class>  
</servlet>
```

Element `servlet-class` specifies the compiled servlet's fully qualified path name. In this case the servlet is defined by the class `WelcomeServlet`.

```
<!-- Servlet mappings -->
```

```
<servlet-mapping>  
  <servlet-name>welcome1</servlet-name>  
  <url-pattern>/welcome1</url-pattern>  
</servlet-mapping>
```

Element `servlet-mapping` specifies the `servlet-name` and `url-pattern` elements. The URL pattern helps the server determine which requests are sent to the servlet (`welcome1`). Since this web application will be installed as part of the `CNT4714` context root, the relative URL supplied to the browser to invoke the servlet is `/CNT4714/welcome1`.


```
</web-app>
```



# Handling HTTP `get` Requests Containing Data

- When a requesting a document or resource from a Web server, it is often the case that data needs to be supplied as part of the request. The second servlet example in the previous set of notes responds to an HTTP `get` request that contains the name entered by the user. The servlet uses this name as part of the response to the client.
- Parameters are passes as name-value pairs in a `get` request. Within the source code for the second `WelcomeServlet2` you will find the following line (see next page):

```
String clientName = request.getParameter( "clientname" );
```



Invoke request object's  
`getParameter` method





```
WelcomeServlet2 - Notepad
File Edit Format View Help

// welcomeServlet2.java
// Processing HTTP get requests containing data.

import javax.servlet.*;
import javax.servlet.http.*;
import java.io.*;

public class welcomeServlet2 extends HttpServlet {
    // process "get" request from client
    protected void doGet( HttpServletRequest request,
        HttpServletResponse response )
        throws ServletException, IOException
    {
        String clientName = request.getParameter( "clientname" );
        response.setContentType( "text/html" );
        PrintWriter out = response.getWriter();
        // send XHTML document to client
        // start XHTML document
        out.println( "<?xml version = \"1.0\"?>" );
        out.println( "<!DOCTYPE html PUBLIC \"-//w3c//DTD \" +
            \"XHTML 1.0 Strict//EN\" \"http://www.w3.org\" +
            \"/TR/xhtml1/DTD/xhtml1-strict.dtd\">" );
        out.println("<html xmlns = \"http://www.w3.org/1999/xhtml\">" );
        out.println("<body bgcolor=white background=images/background.jpg lang=EN-US link=blue vlink=blue" );
        out.println("<body style='tab-interval:.5in'>");
        // head section of document
        out.println("<head>" );
        out.println("<title>Processing get requests with data</title>" );
        out.println("</head>" );
        // body section of document
        out.println("<body>" );
        out.println("<h1>Hello " + clientName + ",<br />" );
        out.println();
        out.println("welcome to the Exciting world of servlet Technology!</h1>" );
        out.println("</body>" );
        // end XHTML document
        out.println("</html>" );
        out.close(); // close stream to complete the page
    }
}
```

Invoke request object's  
getParameter method




# Handling HTTP `get` Requests Containing Data (cont.)

- The `WelcomeServlet2.html` document provides a form in which the user can input their name into the text input element `clientname` and click the `Submit` button to invoke the servlet.
- When the user clicks the `Submit` button, the values of the input elements are placed in name-value pairs as part of the request to the server.
- Notice in the screen shot on the next page that the Tomcat server has appended `?clientname=Mark` to the end of the `action` URL. The `?` separates the **query string** (i.e., the data passed as part of the `get` request) from the rest of the URL in a `get` request. The name-value pairs are passed with the name and value separated by `=`. If there is more than one name-value pair, each pair is separated by an `&`.



# Handling HTTP `get` Requests Containing Data

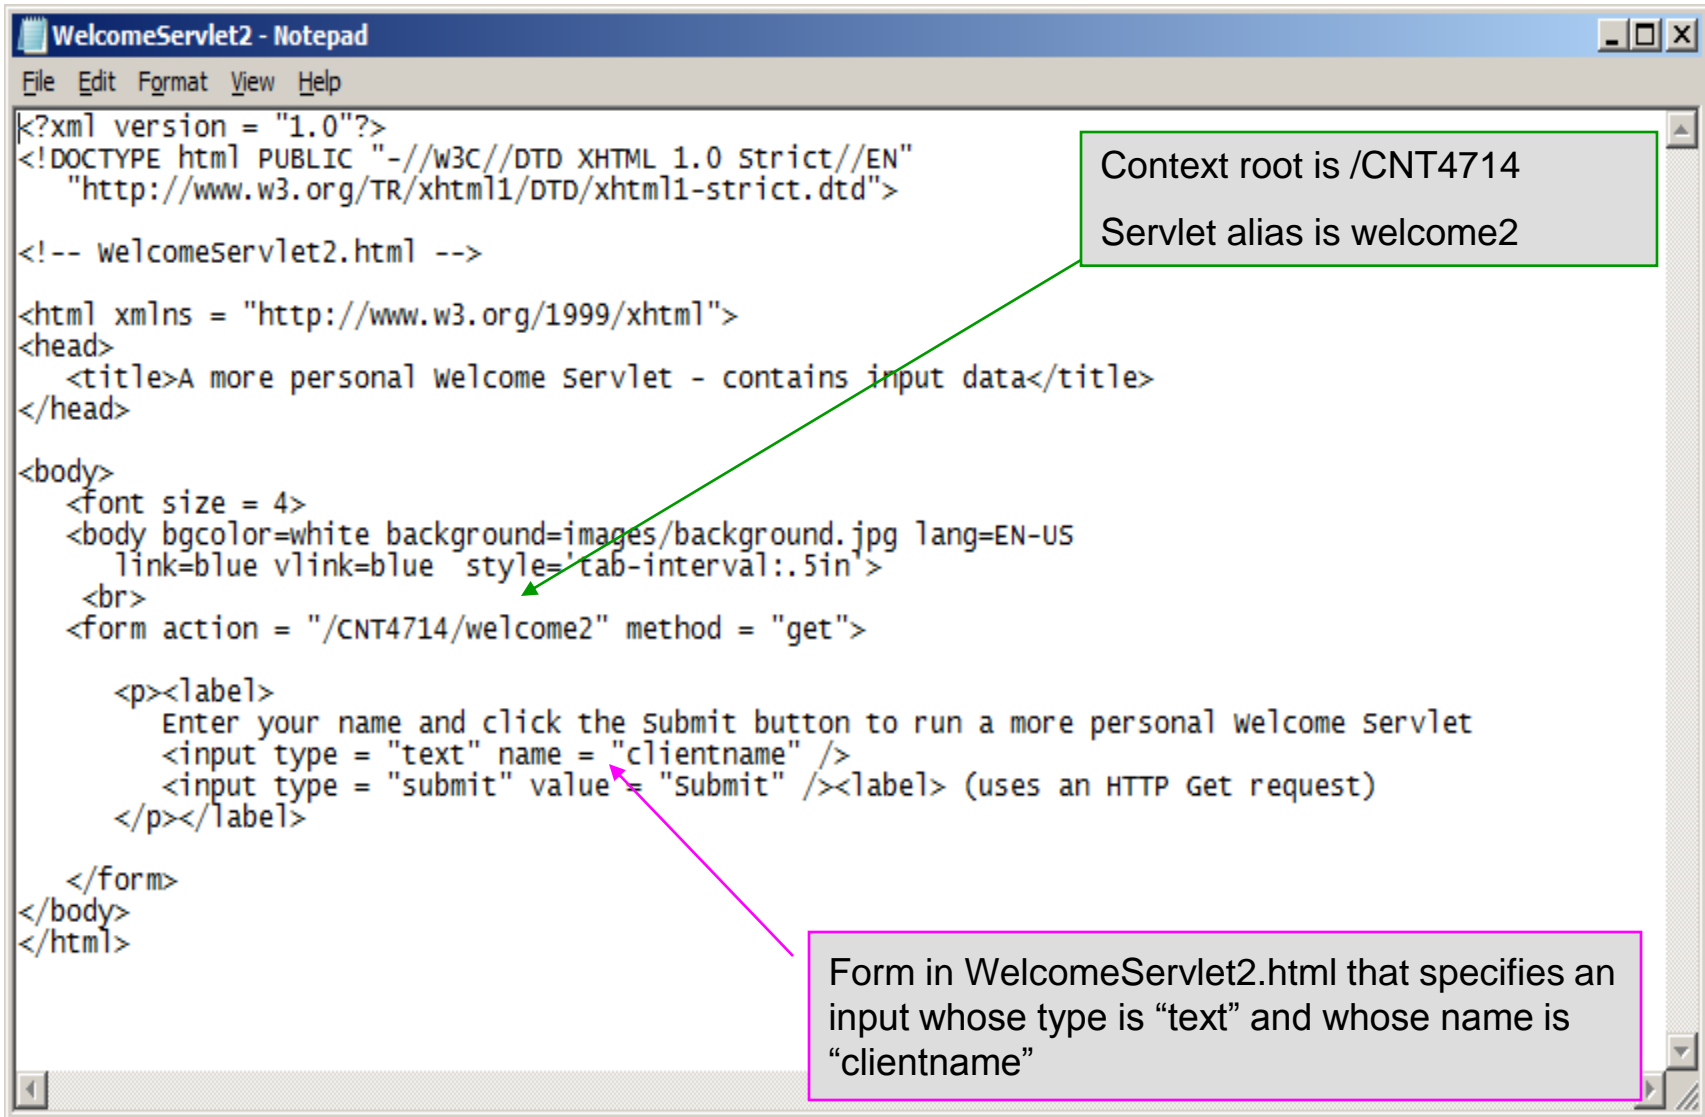

```
WelcomeServlet2 - Notepad
File Edit Format View Help
<?xml version = "1.0"?>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">

<!-- welcomeServlet2.html -->

<html xmlns = "http://www.w3.org/1999/xhtml">
<head>
  <title>A more personal welcome servlet - contains input data</title>
</head>
<body>
  <font size = 4>
  <body bgcolor=white background=images/background.jpg lang=EN-US
  link=blue vlink=blue style=tab-interval:.5in>
  <br>
  <form action = "/CNT4714/welcome2" method = "get">

    <p><label>
      Enter your name and click the submit button to run a more personal welcome servlet
      <input type = "text" name = "clientname" />
      <input type = "submit" value = "submit" /></label> (uses an HTTP Get request)
    </p></label>

  </form>
</body>
</html>
```

Context root is /CNT4714  
Servlet alias is welcome2

Form in WelcomeServlet2.html that specifies an input whose type is "text" and whose name is "clientname"





A more personal Welcome Servlet - contains input data - Windows Internet Explorer

http://localhost:8080/CNT4714/WelcomeServlet2.html

File Edit View Favorites Tools Help

Enter your name and click the Submit button to run a more personal Welcome Servlet   (uses an HTTP Get request)



Processing get requests with data - Windows Internet Explorer


http://localhost:8080/CNT4714/welcome2?clientname=Mark

File Edit View Favorites Tools Help

**Hello Mark,  
Welcome to the Exciting World of Servlet Technology!**

Done Local intranet | Protected Mode: Off 100%



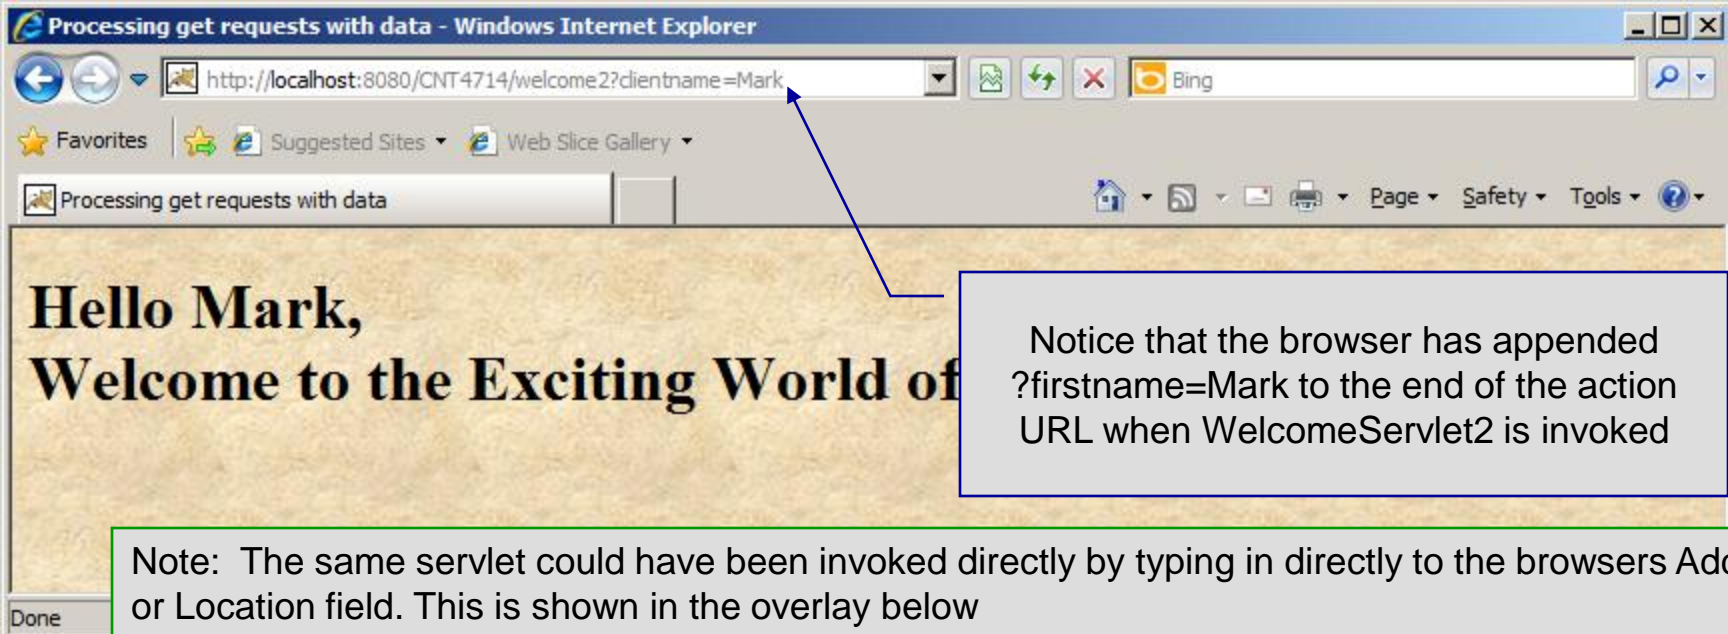

Note: The same servlet could have been invoked directly by typing in directly to the browsers Address or Location field. This is shown in the overlay below



# Handling HTTP `post` Requests

- An HTTP `post` request is typically used to send data from an HTML form to a server-side form handler that processes the data. For example, when you respond to a Web-based survey, a `post` request normally supplies the information you entered into the form to the Web server.
- If you were to replace the `doGet` method in `WelcomeServlet2` with a `doPost` method, nothing would change in the apparent execution of the servlet with the exception that the values passed to the server are **not** appended to the request URL.
- This is illustrated by `WelcomeServlet3` which is exactly the same as `WelcomeServlet2` except that it uses the `doPost` method. Notice how the URL differs between the two versions.





Processing get requests with data - Windows Internet Explorer

http://localhost:8080/CNT4714/welcome2?clientname=Mark

Processing get requests with data

# Hello Mark, Welcome to the Exciting World of Servlet Technology!

WelcomeServlet2 uses a get method.

WelcomeServlet2 uses the get method to supply the data to the form whereas WelcomeServlet3 uses the post method to do the same. Notice that the data is appended to the URL when the get method is used but it is not appended to the URL when the post method is used.

Done Local intranet | Protected Mode: Off 100%

http://localhost:8080/CNT4714/welcome3

Processing post requests with data

# Hello Mark, Welcome to Servlets!

WelcomeServlet3 uses a post method.

Done Local intranet | Protected Mode: Off 100%



# Modifications Necessary to `web.xml` File For Handling Additional Servlets

- In addition to modifying our `index.html` (homepage) file to include descriptors for launching the additional `WelcomeServlet2` and `WelcomeServlet3` servlets, we also need to modify the `web.xml` configuration file to register these servlets with Tomcat.
- We will need to include servlet definitions and servlet mappings for both `WelcomeServlet2` and `WelcomeServlet3`.
- The additional statements that must be included in this file are shown on the next slide.
- You must also include the Java class files for these servlets in the `classes` folder.



```
<servlet>
  <servlet-name>welcome2</servlet-name>

  <description>
    A more personal welcome servlet
  </description>

  <servlet-class>
    WelcomeServlet2
  </servlet-class>
</servlet>
```

Servlet descriptions

```
<servlet>
  <servlet-name>welcome3</servlet-name>

  <description>
    A more personal welcome servlet - using a post action
  </description>

  <servlet-class>
    WelcomeServlet3
  </servlet-class>
</servlet>
```

Servlet mappings

```
<servlet-mapping>
  <servlet-name>welcome2</servlet-name>
  <url-pattern>/welcome2</url-pattern>
</servlet-mapping>
<servlet-mapping>
  <servlet-name>welcome3</servlet-name>
  <url-pattern>/welcome3</url-pattern>
</servlet-mapping>
```



# Redirecting Requests to Other Resources

- Sometimes it is useful to redirect a request to a different resource. For example, a servlet's job might be to determine the type of the client's browser and redirect the request to a Web page that was designed specifically for that browser.
- The same technique is used when redirecting browsers to an error page when the handling of a request fails.
- Shown on the next two pages is the source code for a `ReDirectionServlet` (available on the course website) which redirects the client to another resource selected from a list of resources.



## RedirectionServlet.java

```
// Redirecting a client to a different web page.
import javax.servlet.*;
import javax.servlet.http.*;
import java.io.*;

public class ReDirectionServlet extends HttpServlet {

    // process "get" request from client
    protected void doGet( HttpServletRequest request,
        HttpServletResponse response )
        throws ServletException, IOException
    {
        String location = request.getParameter( "page" );
        if ( location != null )
        {
            if ( location.equals( "CNT 4714" ) )
                response.sendRedirect( "http://www.eecs.ucf.edu/courses/cnt4714/fall2011" );
            else
            {
                if ( location.equals( "welcome1" ) )
                    response.sendRedirect( "welcome1" );
                else
                {
                    if ( location.equals( "cyclingnews" ) )
                        response.sendRedirect( "http://www.cyclingnews.com" );
                    else
                    {
                        if ( location.equals( "error" ) )
                            response.sendRedirect( "error" );
                    }
                }
            }
        }

        // code that executes only if this servlet does not redirect the user to another page
    }
}
```

sendRedirect is a method within the HttpServletResponse Interface. The string parameter is utilized as the URL to which the client's request is redirected.





RedirectionServlet.java  
continued

```
// code that executes only if this servlet does not
response.setContentType( "text/html" );
PrintWriter out = response.getWriter();

// start XHTML document
out.println( "<?xml version = \"1.0\"?>" );

out.println( "<!DOCTYPE html PUBLIC \"-//W3C//DTD \" +
    \"XHTML 1.0 Strict//EN\" \"http://www.w3.org\" +
    \"/TR/xhtml1/DTD/xhtml1-strict.dtd\">" );

out.println(
    "<html xmlns = \"http://www.w3.org/1999/xhtml\">" );

// head section of document
out.println( "<head>" );
out.println( "<title>Invalid page</title>" );
out.println( "</head>" );

// body section of document
out.println( "<body>" );
out.println( "<h1>Invalid page requested</h1>" );
out.println( "<p><a href = \" +
    \"\"RedirectionServlet.html\">" );
out.println( "click here for more details</a></p>" );
out.println( "</body>" );

// end XHTML document
out.println( "</html>" );
out.close(); // close stream to complete the page
}
```



```
1 <?xml version = "1.0"?>
2 <!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN"
3   "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
4 <!-- ReDirectionServlet.html -->
5 <html xmlns = "http://www.w3.org/1999/xhtml">
6 <head>
7   <title>Redirecting a Request to Another Site</title>
8 </head>
9 <body>
10  <font size = 4><body bgcolor=white background=images/background.jpg lang=EN-US
11    link=blue vlink=blue style='tab-interval:.5in'>
12  <br>
13  <p><b>CLICK A LINK TO BE REDIRECTED TO THE APPROPRIATE RESOURCE</b></p>
14  <p>
15  <a href = "/CNT4714/redirect?page=CNT 4714">
16    www.eecs.ucf.edu/courses/cnt4714/fall2011</a><p>
17  <a href = "/CNT4714/redirect?page=welcome1">
18    Original Welcome servlet</a><p>
19  <a href = "/CNT4714/redirect?page=cyclingnews">
20    www.cyclingnews.com</a><p>
21  <a href="/CNT4714/redirect?page=error">
22    Intentional error - redirected page does not exist</a><p>
23  </p>
24 </body>
25 </html>
```




# The servlet and servlet-mapping Portions Of web.xml Modified To Handle The ReDirectionServlet

```
<servlet>
  <servlet-name>redirect</servlet-name>
  <description>
    A redirection servlet.
  </description>
  <servlet-class>
    ReDirectionServlet
  </servlet-class>
</servlet>

<servlet-mapping>
  <servlet-name>redirect</servlet-name>
  <url-pattern>/redirect</url-pattern>
</servlet-mapping>
```



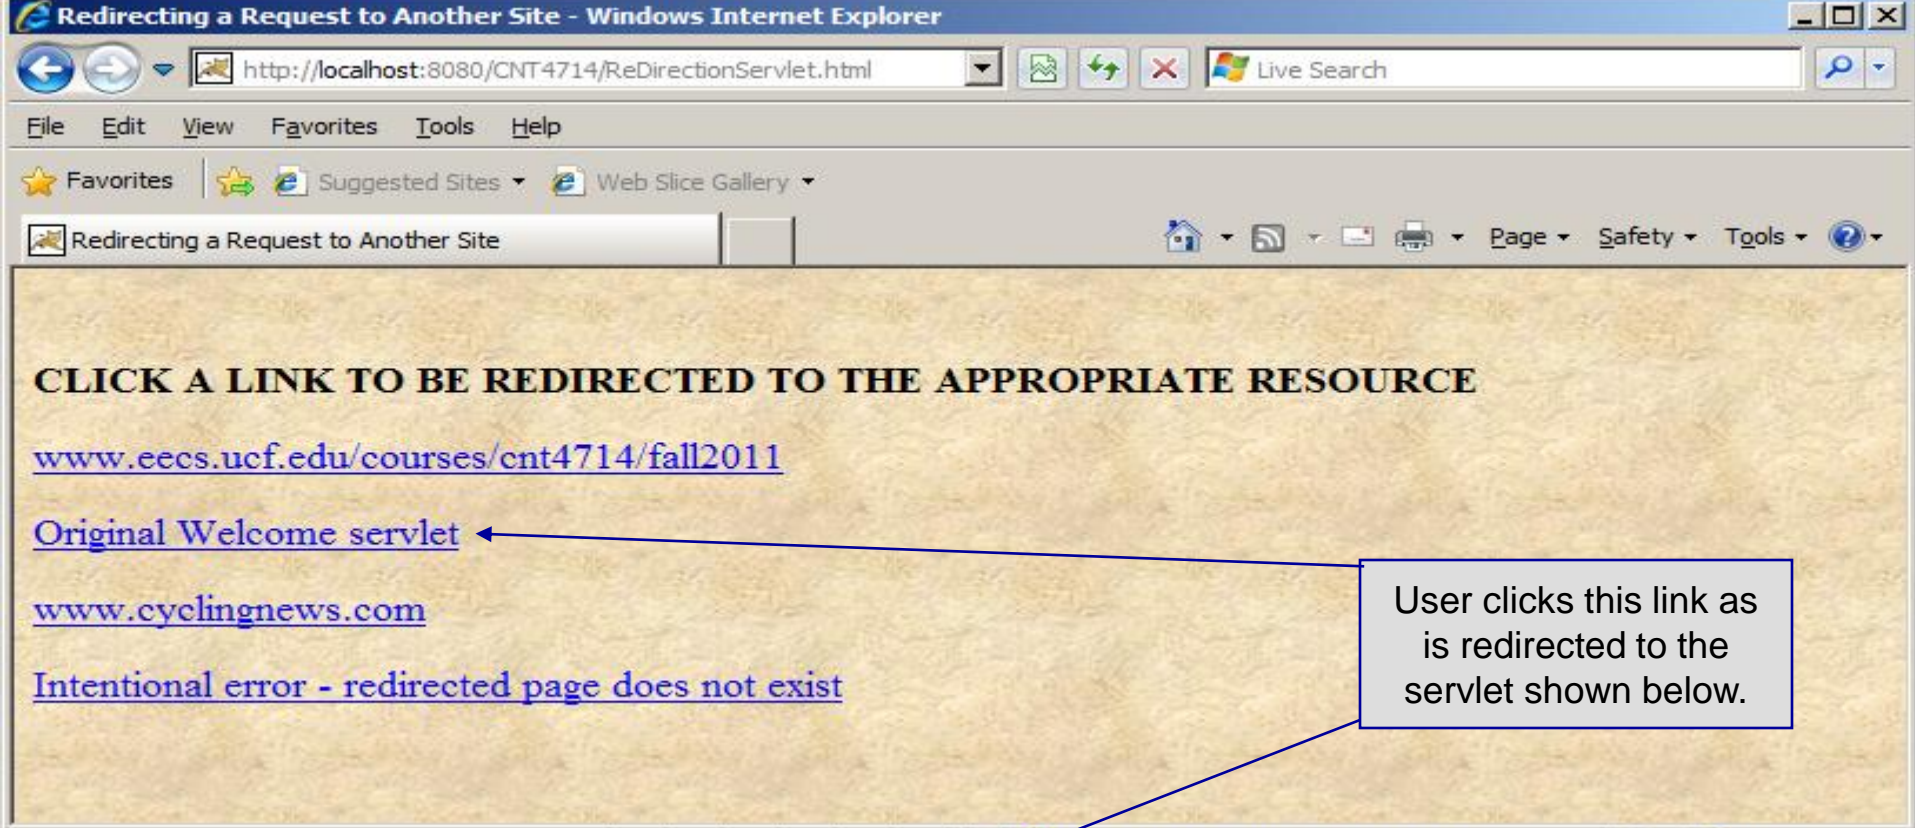



Navigation buttons: Back, Forward, Stop, Refresh, Home, Live Search

Address bar: <http://www.eecs.ucf.edu/courses/cnt4714/fall2011/>

Menu: File Edit View Favorites Tools Help

Navigation: Favorites, Suggested Sites, Web Slice Gallery

Page Title: CNT 4714

User clicks link to be redirected to our course website.



# CNT 4714 - Enterprise Computing - Fall 2011

Monday, Wednesday and Friday 10:30-11:20 am HEC 110

Instructor: [Dr. Mark Llewellyn](#)

Office: HEC 236

Office Hours: M & W 12:30-1:20 pm and 2:30-3:20 pm, T & TH 3:00-5:30 pm, F 12:30-1:20 pm

(407) 823-2790

Email to: [markl@cs.ucf.edu](mailto:markl@cs.ucf.edu)


## TA Information

Mr. Anthony Wehrer

Office Hours: Friday 10:30am - 12:30pm in HEC 308

System tray: Internet | Protected Mode: Off, 100% zoom



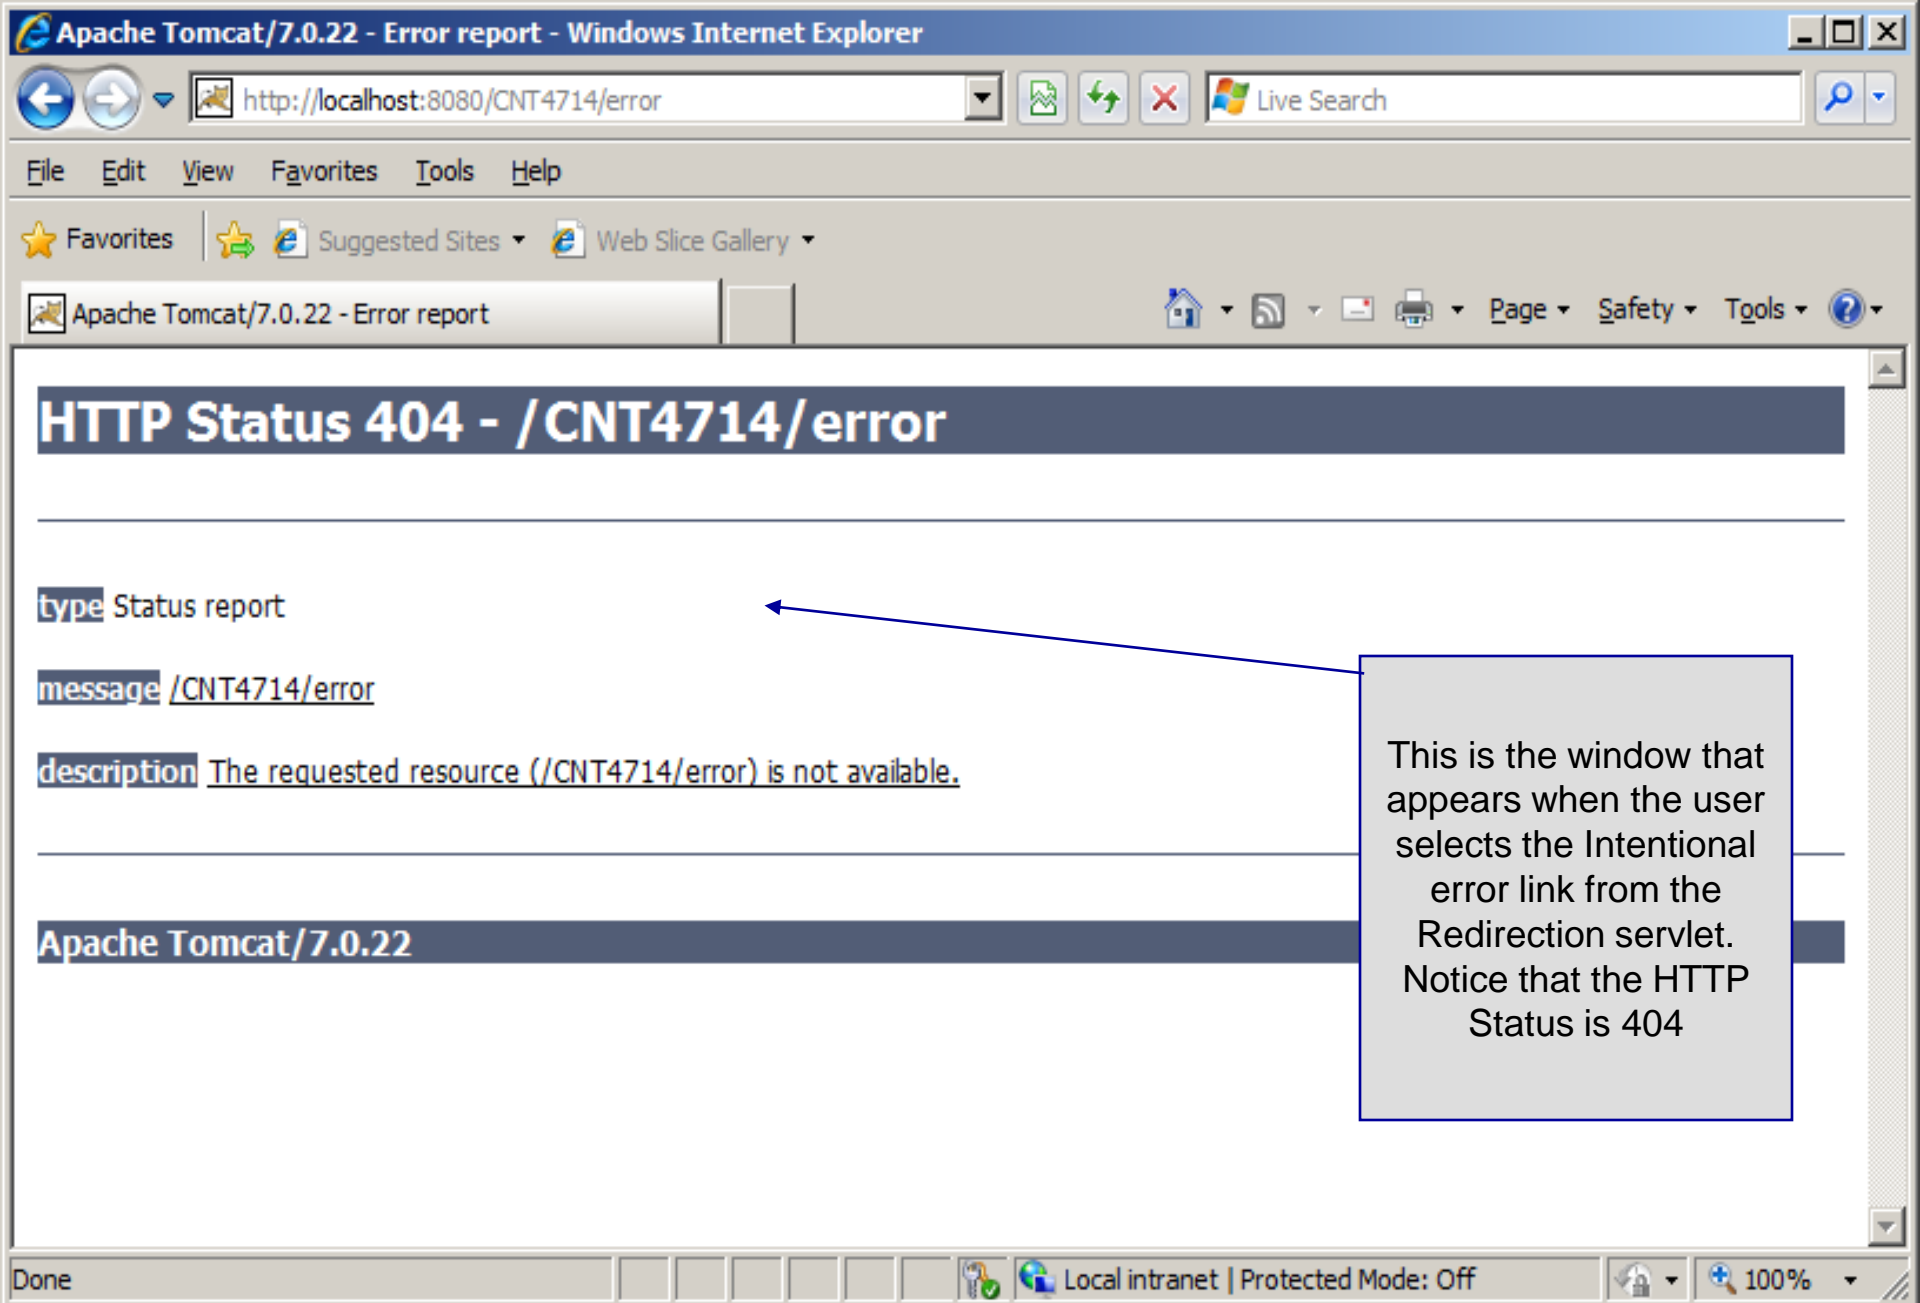

# HTTP Status 404 - /CNT4714/error

**type** Status report

**message** </CNT4714/error>

**description** The requested resource (/CNT4714/error) is not available.

Apache Tomcat/7.0.22

This is the window that appears when the user selects the Intentional error link from the Redirection servlet. Notice that the HTTP Status is 404

