

COP 4610L: Applications in the Enterprise Spring 2005

Introduction to Servlet Technology – Part 1

Instructor : Mark Llewellyn
markl@cs.ucf.edu
CSB 242, 823-2790
<http://www.cs.ucf.edu/courses/cop4610L/spr2005>

School of Electrical Engineering and Computer Science
University of Central Florida



Client-Server Relationship Revisited

- In a client-server relationship, the client requests that some action be performed and the server performs the action and responds to the client.
- This **request-response model** of communication is the foundation for the highest-level view of networking in Java – **servlets** and **JavaServer Pages (JSP)**.
- A **servlet** extends the functionality of a server, such as a Web server that serves Web pages to a user's browser using the HTTP protocol. A servlet can almost be thought of as an applet that runs on the server side--without a face. Java servlets make many Web applications possible.
- Packages `javax.servlet` and `javax.servlet.http` provide the classes and interfaces to define servlets. Packages `javax.servlet.jsp` and `javax.servlet.jsp.tagext` provide the classes and interfaces that extend the servlet capabilities for JSP.



Client-Server Relationship Revisited (cont.)

- Using special syntax, JSP allows Web-page implementers to create pages that encapsulate Java functionality and even to write scriptlets of actual Java code directly into the page.
- A common implementation of the request-response model is between Web browsers and Web servers. When a user selects a Web site to browse through the browser (the client application), a request is sent to the appropriate Web server (the server application). The server normally responds to the client by sending the appropriate XHTML Web page.
- Servlets are effective for developing Web-based solutions that help provide secure access to a Web site, interact with databases on behalf of a client, dynamically generate custom XHTML documents to be displayed by browsers and maintain unique session information for each client.



Static and Dynamic Web Content

- Consider how a web page is displayed by a browser.
 - Typically, the web page is created using HTML and stored as a file on the web server. A user enters a URL for the file from a web browser. The browser contacts the web server and requests the file. The server finds the file and returns it to the browser. The browser then displays the file for the user.
- Static information is stored in HTML files. The HTML files can be updated, but at any given time, every request for the same file returns exactly the same content. The contents do not change regardless of who requested the file.




Static and Dynamic Web Content (cont.)

- Not all information, however, is static in nature. Recall, the first programming assignment. The HTML pages that generated this information must be generated dynamically.
- Dynamic web pages are generated by web server. The web server will execute certain programs to process user requests from browsers in order to produce a customized response.
- The **Common Gateway Interface (CGI)** was proposed to generate dynamic web content. The interface provides a standard framework for web servers to interact with external program known as **CGI programs**.



CGI Programming

- When a web server receives a request from a browser it passes it to the CGI program. The CGI program processes the request and generates a response at runtime. CGI programs can be written in any language, but Perl is the most popular choice.

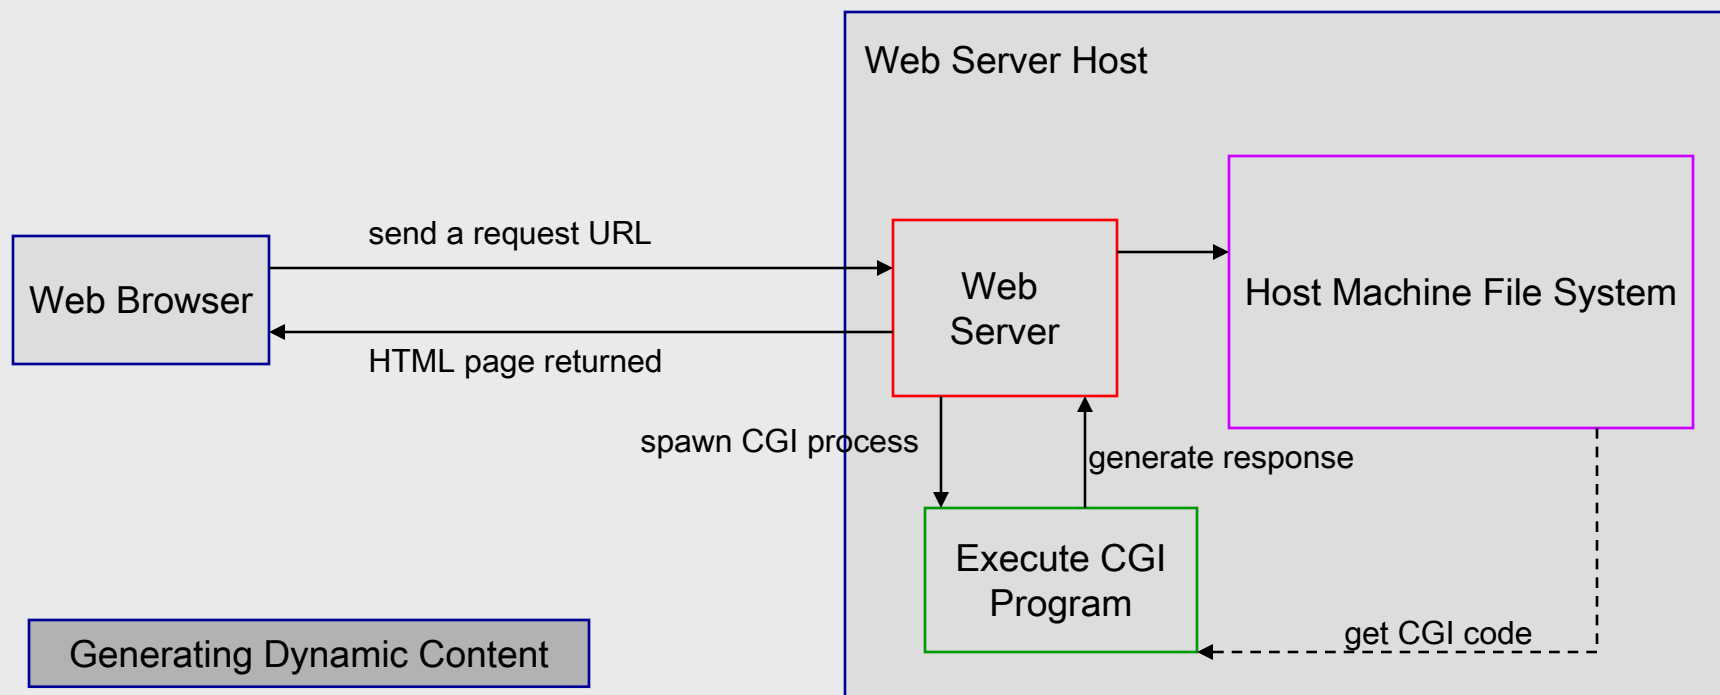

The GET and POST Methods

- The two most common HTTP requests, also known as methods, are GET and POST.
- The web browser issues a request using a URL or an HTML form to trigger the web server to execute a CGI program. (We'll deal with forms later.) When issuing a CGI request directly from a URL, the GET method is used.
- This form of a URL is known as a **query string**. The URL query string consists of the location of the CGI program, parameters, and their values.
- When issuing a request from an HTML form, either a GET or POST method can be used.



The GET and POST Methods (cont.)

- The form explicitly specifies which of the two is used.
- If the GET method is used, the data in the form are appended to the request string as if they were submitted using a URL.
- If the POST method is used, the data in the form are packaged as part of the request file. The server program obtains the data by reading the file.

The GET and POST methods both send requests to the web server. The POST method always triggers the execution of the corresponding CGI program. The GET method may not cause the CGI program to be executed if the previous same request is cached in the web browser. Browsers often cache web pages so that the same request can be quickly responded to without contacting the web server. The browser checks the request sent through the GET method as a URL query string. If the results for the exact same URL are cached on a disk, then the previous web page for the URL may be displayed. To ensure that a new web page is always displayed, use the POST method.



From CGI To Java Servlets

- CGI provides a relatively simple approach for creating dynamic web applications that accept a user request, process it on the server side, and return responses to the user's browser.
- However, CGI is extremely slow when handling a large number of requests simultaneously, because the web server must spawn a process for executing each CGI program.
- Java servlets were developed to remedy the performance problem of CGI programs. Java servlets are basically Java programs that behave like CGI programs.



Java Servlets

- Java servlets are executed upon request from a web browser.
- All servlets execute inside a **servlet container**, also referred to as a **servlet server** or a **servlet engine**.
- A servlet container is a single process that runs a JVM (Java Virtual Machine). The JVM creates a thread to handle each servlet (recall that threads have considerably less overhead than full-blown processes). All the threads share the same memory allocated to the JVM. Since the JVM persists beyond the lifecycle of a single servlet execution, servlets can share objects already created in the JVM.
 - For example, if multiple servlets access the same database, they can share the connection object.



Thin Clients

- Servlets are the ideal solution for database-intensive applications that communicate with **thin clients**.
 - **Thin clients** are applications that provide presentation but do not process data, thus requiring few computing resources.
- The server is responsible for database access. Clients connect to the server using standard protocols available on most client platforms. The presentation-logic code for generating dynamic content can be written once and reside on the server for access by clients, to allow programmers to create efficient thin clients.



Apache Tomcat Server

- Sun Microsystems, through the Java Community Process is responsible for the development of the servlet and JSP specifications.
- To run Java servlets, you need a servlet container. While many servlet containers are available, the reference implementation of both these standards is developed by the Apache Software Foundation (www.apache.org) as part of the Jakarta Project.
- The Jakarta Project contains many subprojects designed to help commercial server-side developers.
- The servlet and JSP part of the Jakarta Project is called **Tomcat**. Tomcat is the official reference implementation of the JSP and servlet standards. Tomcat can be used standalone as a web server or plugged into a web server like Apache, IIS, etc.. The current stable implementation is Tomcat 5.5.7.



Servlet Overview and Architecture

- The Internet offers many protocols. The HTTP (Hypertext Transfer Protocol) that forms the basis of the WWW uses URLs (Uniform Resource Locators) to locate resources on the Internet.
- URLs can represent files or directories and can represent complex tasks such as database lookups and Internet searches.
- JSP technology, basically an extension of servlet technology, simplifies the process of creating pages by separating presentation from content.
- Typically, JSPs are used when most of the content sent to the client is static text and markup, and only a small portion of the content is generated dynamically with Java code.




Servlet Overview and Architecture (cont.)

- Servlets are more commonly used when a small portion of the content sent to the client is static text or markup. In fact, some servlets do not produce content. Rather, they perform a task on behalf of the client, then invoke other servlets or JSPs to provide a response.
- Note that in most cases servlet and JSP technologies are interchangeable.
- The server that executes a servlet is referred to as the **servlet container** or **servlet engine**.
- Servlets and JSP have become so popular that they are now supported directly or with third-party plug-ins by most major Web servers and application servers (servers that execute applications to generate dynamic Web pages in response to requests).



Servlet Overview and Architecture (cont.)

- We'll look at servlets that implement the request-response model between clients and servers using the HTTP protocol. This architecture is shown in the diagram below.

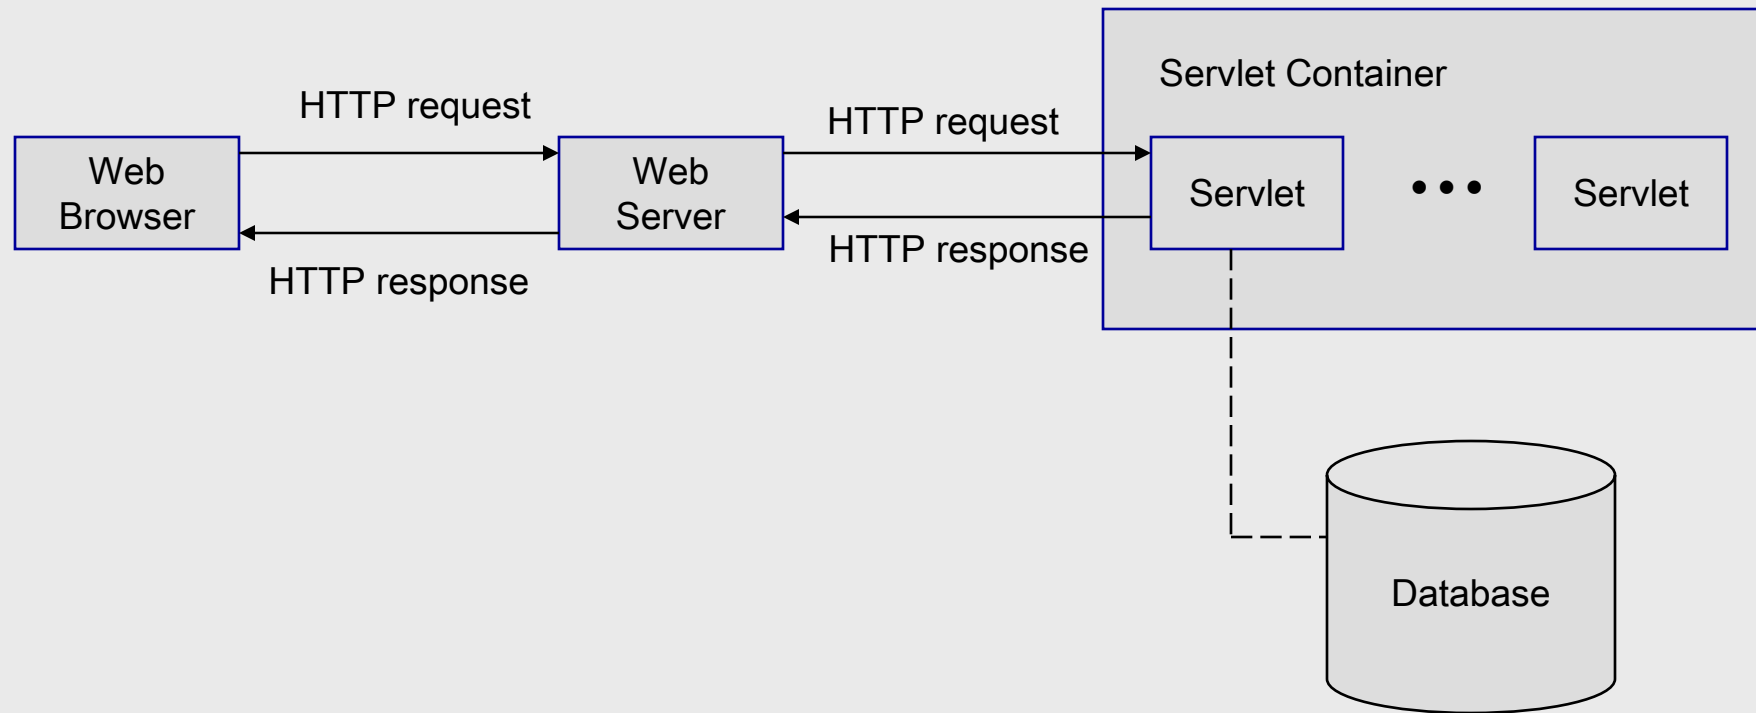

Servlet Overview and Architecture (cont.)

Explanation of the architecture diagram on previous page

- A client application sends an HTTP request to the server.
- The servlet container receives the request and directs it to be processed by the appropriate servlet.
- The servlet does its processing, which may include interacting with a database or other server-side components, such as other servlets or JSPs.
- The servlet returns its results to the client – normally in the form of an HTML, XHTML, or XML document to display in a browser.



Interface Servlet and the Servlet Lifecycle

- Architecturally speaking, all servlets must implement the Servlet interface of package `javax.servlet`.
- The methods of interface Servlet are invoked by the servlet container. This interface declares five methods which deal with the execution of a servlet. These methods are shown on the next page. For the details see: www.java.sun.com/j2ee/1.4/docs/api/javax/servlet/Servlet.html
- A servlet's life cycle begins when the servlet container loads it into memory – normally, in response to the first request for the servlet.
- Before the servlet can handle that request, the container invokes the servlet's `init` method.



Methods of the Servlet Interface

Method	Description
<code>destroy()</code>	Called by the servlet container to indicate to a servlet that the servlet is being taken out of service.
<code>getServletConfig()</code>	Returns a <code>ServletConfig</code> object, which contains initialization and startup parameters for this servlet.
<code>getServletInfo()</code>	Returns information about the servlet, such as author, version, and copyright.
<code>init()</code>	Called by the servlet container to indicate to a servlet that the servlet is being placed into service.
<code>service()</code>	Called by the servlet container to allow the servlet to respond to a request.



The Servlet Lifecycle

- After `init` completes execution, the servlet can respond to its first request.
- All requests are handled by the a servlet's `service` method, which receives the request, processes it and sends a response to the client.
- During the servlet's lifecycle, the method `service` is invoked once per request. Each new request is typically handled in a separate thread of execution (managed by the servlet container) in which method `service` executes.
- When the servlet container terminates the servlet (whenever the servlet needs more memory or when it is shutdown), the servlet's `destroy` method is invoked to release servlet resources.



Setting Up Tomcat

- Tomcat is a fully functional implementation of servlets and JSP. It includes a Web server, so it can be used as a standalone test container for servlets and JSPs.
 - The current stable version is 5.5.7 available from www.apache.org. This version was declared stable on January 30, 2005.
1. Select Jakarta from the menu on the left-hand side of the screen. As shown on page 13.
 2. Once in the Jakarta project, select Download binaries from the left-hand side of the screen as shown on page 15.
 3. Once in the download binaries screen, move well down the page, until you find the tomcat 5.5.7 area and select the option of your choice. This is shown on page 18.



The Apache Software Foundation

http://www.apache.org/

Apache Projects

[HTTP Server](#)
[Ant](#)
[APR](#)
[Cocoon](#)
[DB](#)
[Excalibur](#)
[Forrest](#)
[Geronimo](#)
[Gump](#)
[Incubator](#)
[Jakarta](#)
[James](#)
[Lenya](#)
[Logging](#)
[Lucene](#)
[Maven](#)
[Perl](#)
[Portals](#)
[SpamAssassin](#)
[Struts](#)
[TCL](#)
[Web Services](#)
[XML](#)
[XMLBeans](#)
[XML Graphics](#)
[Conferences](#)
[Foundation](#)

Other Projects

[PHP](#)

Welcome!

The Apache Software Foundation provides support for the Apache community of open-source software projects. The Apache projects are characterized by a collaborative, consensus based development process, an open and pragmatic software license, and a desire to create high quality software that leads the way in its field. We consider ourselves not simply a group of projects sharing a server, but rather a community of developers and users.

Support the Apache Software Foundation

You are invited to participate in The Apache Software Foundation. Our [membership](#) consists of those individuals who have demonstrated a commitment to collaborative open-source software development through sustained participation and contributions within the Foundation's projects. Of course, you can contribute to the foundation in many ways:

[Buy Apache Gear](#)

[Donate your old car](#)

[Donate via PayPal](#)

[Support FAQ](#)

Latest News

If you would like to keep up with news and announcements from the foundation and all its projects, you can subscribe to the new [Apache Announcements List](#).

Make plans for ApacheCon Europe 2005 in Germany

We hope you all had an excellent time at [ApacheCon 2004 US in Las Vegas](#). Please make plans to join us in Stuttgart, Germany on July 18-22, 2005 for ApacheCon Europe 2005.

ASF Position Regarding Sender ID

As part of the [IETF MARID Working Group](#) last call for comments, the Apache Software Foundation has sent the working group [an open letter](#) detailing why the patent licensing of the Sender ID specification will prevent ASF projects from implementing and deploying software that supports the Sender ID

Select the Jakarta project

Foundation

- [FAQ](#)
- [Licenses](#)
- [Public Records](#)
- [Donations](#)
- [Thanks](#)
- [Contact](#)

News

- [Conferences](#)
- [Other Events](#)

How it works

- [Introduction](#)
- [Meritocracy](#)
- [Structure](#)
- [Roles](#)
- [Collaboration](#)
- [Infrastructure](#)
- [Incubator](#)
- [Other entities](#)
- [Glossary](#)
- [Voting](#)

Get Involved

- [Mailing Lists](#)
- [Version Control](#)
- [Developer Info](#)





The Apache Jakarta Project

<http://jakarta.apache.org/>

Support

- [Downloads](#)
- [CVS / SVN](#)
- [Mailing Lists](#)
- [Bug Database](#)
- [Jakarta Wiki](#)
- [FAQs](#)

Subprojects

- [Alexandria](#)
- [BCEL](#)
- [BSF](#)
- [Cactus](#)
- [Commons](#)
- [ECS](#)
- [HiveMind](#)
- [JMeter](#)
- [ORO](#)
- [POI](#)
- [Regexp](#)
- [Slide](#)
- [Taglibs](#)
- [Tapestry](#)
- [Tomcat](#)
- [Turbine](#)
- [Velocity](#)
- [Watchdog](#)

Incubating

Welcome to The Jakarta Project

The Jakarta Project offers a diverse set of open source Java solutions and is a part of [The Apache Software Foundation](#) (ASF) which encourages a collaborative, consensus-based development process under an open [software license](#).

Jakarta is organized into subprojects, summarized in the [section below](#). The ASF contains other Java projects, some of which were a part of Jakarta, that are detailed on the [ASF Project](#) page.

It is recommended that users of Jakarta products [subscribe](#) to the Jakarta [announcements mailing list](#).

News

[ApacheCon Europe 2005 July 18-22 Stuttgart](#)

[Latest Jakarta News](#)

- [6 March 2005 - Commons Logging 1.1-alpha-2 Released](#)
- [24 February 2005 - HiveMind 1.1-alpha-2 Released](#)
- [22 February 2005 - Tapestry 3.1-alpha-1 Released](#)
- [20 February 2005 - Tomcat 5.5.8-alpha Released](#)
- [15 February 2005 - Tapestry 3.0.2 Released](#)
- [14 February 2005 - Lucene moves to TLP](#)
- [06 February 2005 - Commons HttpClient 3.0 RC1 Released](#)
- [30 January 2005 - Tomcat 5.5.7 Voted Stable](#)
- [28 January 2005 - Cactus 1.7 Released](#)
- [20 January 2005 - Tomcat 5.5.7-alpha Released](#)
- [19 January 2005 - HiveMind 1.1-alpha-1 Released](#)

Click on Tomcat

About Jakarta

- [Welcome](#)
- [News](#)
- [Contacting Us](#)
- [Who We Are](#)
- [Charter](#)
- [Java@Apache](#)

Reference

- [Apache Website](#)
- [How The ASF Works](#)
- [Developer Resources](#)
- [Get Involved](#)
- [Vendor Support](#)
- [Project Guidelines](#)
- [Reference Library](#)
- [Apache on the JSPA](#)
- [Acknowledgements](#)

Search Jakarta

Unaffiliated Links

- [Apache News](#)
- [FreeBSD Java Ports](#)
- [JPackage](#)
- [Planet Apache](#)



The Apache Jakarta Project

<http://jakarta.apache.org/>



Tomcat

- [Home](#)
- [Bug Database](#)
- [Resources](#)
- [IRC](#)
- [FAQ](#)

Apache Jakarta Tomcat

Tomcat is the servlet container that is used in the official Reference Implementation for the [Java Servlet](#) and [JavaServer Pages](#) technologies. The Java Servlet and JavaServer Pages specifications are developed by Sun under the [Java Community Process](#).

Tomcat is developed in an open and participatory environment and released under the [Apache Software License](#). Tomcat is intended to be a collaboration of the best of breed developers from around the world. To learn more about getting involved, [click here](#).

Click on Binaries

Documentation

- [Tomcat 5.5](#)
- [Tomcat 5.0](#)
- [Tomcat 4.1](#)
- [Tomcat 3.3](#)

Tomcat Versions

For the impatient, current Tomcat production quality releases vs. Servlet/JSP specifications:

Servlet/JSP Spec	Tomcat version
2.4/2.0	5.5.7
2.3/1.2	4.1.31
2.2/1.1	3.3.2

Download

- [Binaries](#)
- [Source Code](#)

Archives

- [Tomcat 4.0](#)
- [Tomcat 3.2](#)

The releases are described in more detail below to help you determine which one is right for you. More details about each release can be found in the associated release notes.

Please note that although we offer downloads and documentation of older releases, such as Tomcat 3.x and 4.x, we strongly encourage users to use the latest stable version of Tomcat whenever possible. We recognize that upgrading across major version may not be a trivial task, and some support is still offered on the mailing list for users of old versions. However, because of the community-driven support approach, the older your version the less people would be interested or able to support you.

Links

- [Front Page](#)
- [News & Status](#)

Tomcat 5.x



The Apache Jakarta Project

<http://jakarta.apache.org/>

Support

- [Downloads](#)
- [CVS / SVN](#)
- [Mailing Lists](#)
- [Bug Database](#)
- [Jakarta Wiki](#)
- [FAQs](#)

Subprojects

- [Alexandria](#)
- [BCEL](#)
- [BSF](#)
- [Cactus](#)
- [Commons](#)
- [ECS](#)
- [HiveMind](#)
- [JMeter](#)
- [ORO](#)
- [POI](#)
- [Regexp](#)
- [Slide](#)
- [Taglibs](#)
- [Tapestry](#)
- [Tomcat](#)
- [Turbine](#)
- [Velocity](#)
- [Watchdog](#)

Incubating

Downloads

Binary and source releases, nightly builds and links into the [archives](#) may be obtained by selecting a project below.

Release Announcements

We recommend that you subscribe to the Jakarta [announcements](#) mailing list to be notified when releases are made by the Jakarta project.

Downloads

- [BCEL](#)
- [BSF](#)
- [Cactus](#)
- [Commons](#)
- [ECS](#)
- [Hivemind](#)
- [JMeter](#)
- [ORO](#)
- [POI](#)
- [Regexp](#)
- [Slide](#)
- [Taglibs](#)
- [Tapestry](#)
- [Tomcat](#)
- [Turbine](#)
- [Velocity](#)

Click on Tomcat

About Jakarta

- [Welcome](#)
- [News](#)
- [Contacting Us](#)
- [Who We Are](#)
- [Charter](#)
- [Java@Apache](#)

Reference

- [Apache Website](#)
- [How The ASF Works](#)
- [Developer Resources](#)
- [Get Involved](#)
- [Vendor Support](#)
- [Project Guidelines](#)
- [Apache License Library](#)
- [Apache License on the JSPA](#)
- [Apache License Medgements](#)

Search Jakarta

Unaffiliated Links

- [Apache News](#)
- [FreeBSD Java Ports](#)
- [JPackage](#)
- [Planet Apache](#)



The Apache Jakarta Project

<http://jakarta.apache.org/>

Support

- [Downloads](#)
- [CVS / SVN](#)
- [Mailing Lists](#)
- [Bug Database](#)
- [Jakarta Wiki](#)
- [FAQs](#)

Subprojects

- [Alexandria](#)
- [BCEL](#)
- [BSF](#)
- [Cactus](#)
- [Commons](#)
- [ECS](#)
- [HiveMind](#)
- [JMeter](#)
- [ORO](#)
- [POI](#)
- [Regexp](#)
- [Slide](#)
- [Taglibs](#)
- [Tapestry](#)
- [Tomcat](#)
- [Turbine](#)
- [Velocity](#)
- [Watchdog](#)

Incubating

Tomcat Downloads

For more information concerning Tomcat, see the [Tomcat](#) site.

- [Tomcat 3](#)
- [Tomcat 4](#)
- [Tomcat 5](#)
- [Tomcat Connectors \(mod_jk, mod_jk2, mod_webapp\)](#)

Select Tomcat 5

About Jakarta

- [Welcome](#)

Reference

- [Apache Website](#)
- [How The ASF Works](#)
- [Developer Resources](#)
- [Get Involved](#)
- [Vendor Support](#)
- [Project Guidelines](#)
- [Reference Library](#)
- [Apache on the JSPA](#)
- [Acknowledgements](#)

Search Jakarta

Unaffiliated Links

- [Apache News](#)
- [FreeBSD Java Ports](#)
- [JPackage](#)
- [Planet Apache](#)

ie Jakarta Site - Tomcat 5 Downloads - Microsoft Internet Explorer

Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Refresh Mail Print Wordpad Find Favorites

http://jakarta.apache.org/site/downloads/downloads_tomcat-5.cgi

- 5.5.8 alpha zip
 - [md5] [pgp]
- 5.5.7
 - Binary
 - [README \(contains packaging information\)](#)
 - [5.5.7.exe](#)
 - [md5] [pgp]
 - [5.5.7.tar.gz](#)
 - [md5] [pgp]
 - [5.5.7.zip](#)
 - [md5] [pgp]
 - [5.5.7 Deployer tar.gz](#)
 - [md5] [pgp]
 - [5.5.7 Deployer zip](#)
 - [md5] [pgp]
 - [5.5.7 Embed tar.gz](#)
 - [md5] [pgp]
 - [5.5.7 Embed zip](#)
 - [md5] [pgp]
 - [5.5.7 Admin tar.gz](#)
 - [md5] [pgp]
 - [5.5.7 Admin zip](#)
 - [md5] [pgp]
 - [5.5.7 Compat tar.gz](#)
 - [md5] [pgp]
 - [5.5.7 Compat zip](#)
 - [md5] [pgp]
 - Source
 - [5.5.7.tar.gz](#)
 - [md5] [pgp]
 - [5.5.7.zip](#)
 - [md5] [pgp]
- 5.0.30-beta
 - Binary
 - [README \(contains packaging information\)](#)
 - [5.0.30-beta.exe](#)
 - [md5] [pgp]
 - [5.0.30-beta.tar.gz](#)

Select one of these options. Your choice of downloads. For Windows users, the .exe version provides a typical Windows installer.

Setting Up Tomcat

- Once you've downloaded and installed Tomcat you're ready to run a demonstration test that will tell you if you've got everything set-up properly.

NOTE: During the install, Tomcat will ask you which TCP port Tomcat should run on. To avoid any conflict with standard Web servers which default to TCP port 80, Tomcat is set to default to TCP port 8080. If you have any other service running on this port change the port number at this time to one on which no conflict will occur.


In all subsequent examples, I'm running Tomcat on TCP port 8080.



Starting Up Tomcat

- Once Tomcat is installed, you need to start it as a service. On Windows machines, the current versions of Tomcat are installed as a service that will start when Windows starts. On Unix/Linux a startup.sh file is included so you just type startup (assuming you are in the bin directory where you located Tomcat).
1. Start Tomcat running.
 2. Start your Web browser.
 3. Enter URL: <http://localhost:8080>
 4. You should see the screen on the following page if everything is set up ok.



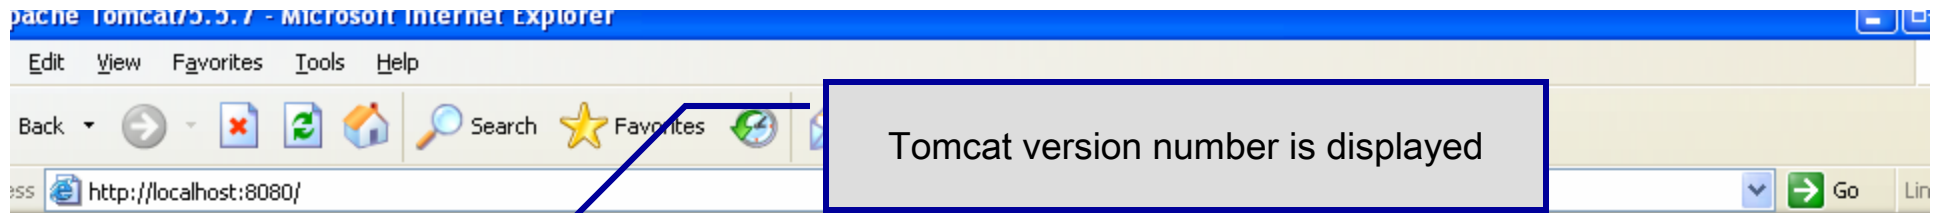

Apache Tomcat/5.5.7



The **Apache Jakarta Project**

<http://jakarta.apache.org/>

Administration

[Status](#)

[Tomcat Administration](#)

[Tomcat Manager](#)

Documentation

[Release Notes](#)

[Change Log](#)

[Tomcat Documentation](#)

Tomcat Online

[Home Page](#)

[Jug Database](#)

[Open Bugs](#)

[Users Mailing List](#)

[Developers Mailing List](#)

[FAQ](#)

Examples

**If you're seeing this page via a web browser, it means you've setup Tomcat successfully.
Congratulations!**

As you may have guessed by now, this is the default Tomcat home page. It can be found on the local filesystem at:

`$CATALINA_HOME/webapps/ROOT/index.jsp`

where "\$CATALINA_HOME" is the root of the Tomcat installation directory. If you're seeing this page, and you don't think you should be, then either you're either a user who has arrived at new installation of Tomcat, or you're an administrator who hasn't got his/her setup quite right. Providing the latter is the case, please refer to the [Tomcat Documentation](#) for more detailed setup and administration information than is found in the INSTALL file.

NOTE: This page is precompiled. If you change it, this page will not change since it was compiled into a servlet at build time. (See `$CATALINA_HOME/webapps/ROOT/WEB-INF/web.xml` as to how it was mapped.)

NOTE: For security reasons, using the administration webapp is restricted to users with role "admin". The manager webapp is restricted to users with role "manager". Users are defined in `$CATALINA_HOME/conf/tomcat-users.xml`.

Included with this release are a host of sample Servlets and JSPs (with associated source code), extensive documentation (including the Servlet 2.4 and JSP 2.0 API JavaDoc), and an introductory guide to developing web applications.