



## Sequence Analysis

# EPIP: A novel approach for condition-specific enhancer-promoter interaction prediction

Amlan Talukder<sup>1</sup>, Samaneh Saadat<sup>1</sup>, Xiaoman Li<sup>2,\*</sup> and Haiyan Hu<sup>1,\*</sup>

<sup>1</sup>Department of Computer Science, University of Central Florida, Orlando, FL 32816, USA and

<sup>2</sup>Burnett School of Biomedical Science, College of Medicine, University of Central Orlando, FL 32816, USA.

\* To whom correspondence should be addressed. Tel: +1 407 882 0134; Fax: +1 407 823 5835; Email: haihu@cs.ucf.edu. Correspondence may also be addressed to Xiaoman Li. Tel: +1 407 823 4811; Fax: +1 407 823 5835; Email: xiaoman@mail.ucf.edu.

Associate Editor: XXXXXXX

Received on XXXXX; revised on XXXXX; accepted on XXXXX

## Abstract

**Motivation:** The identification of enhancer-promoter interactions (EPIs), especially condition-specific ones, is important for the study of gene transcriptional regulation. Existing experimental approaches for EPI identification are still expensive, and available computational methods either do not consider or have low-performance in predicting condition-specific EPIs.

**Results:** We developed a novel computational method called EPIP (Enhancer Promoter Interaction Prediction) to reliably predict EPIs, especially condition-specific ones. EPIP is capable of predicting interactions in samples with limited data as well as in samples with abundant data. Tested on more than eight cell lines, EPIP reliably identifies EPIs, with an average area under the receiver operating characteristic curve of 0.95 and an average area under the precision-recall curve of 0.73. Tested on condition-specific enhancer-promoter interactions, EPIP correctly identified 99.26% of them. Compared with two recently developed methods, EPIP outperforms them with a better accuracy.

**Availability:** The EPIP tool is freely available at <http://www.cs.ucf.edu/~xiaoman/EPIP/>.

**Contact:** xiaoman@mail.ucf.edu or haihu@cs.ucf.edu

**Supplementary information:** Supplementary data are available at *Bioinformatics* online.

## 1 Introduction

Enhancers play important regulatory roles. They control the expression patterns of their target genes by directly interacting with the promoter regions of those genes (Mora *et al.*, 2015). Even though enhancers may be tens of kilobases (kb) away from their target genes, they get in direct contact with the promoters of their target genes via chromatin looping (Dekker *et al.*, 2002; De Laat *et al.*, 2013; Cai *et al.*, 2010; Zheng *et al.*, 2014). Because of the long range of possible distances (1 kb to several megabases (Mb)) between enhancers and their targeted promoters, it is challenging to predict enhancer-promoter interactions (EPIs) (De Laat *et al.*, 2013). To date, the majority of EPIs under specific experimental conditions have not been discovered yet (Corradin *et al.*, 2014).

Experimental approaches for identifying EPIs are mainly based on chromosome conformation capture (3C) and its variants such as chromatin interaction analysis with paired-end tag sequencing (ChIA-PET) and

high throughput genome-wide chromosome conformation capture (Hi-C) (Dekker *et al.*, 2002; Fullwood *et al.*, 2009; Rao *et al.*, 2014). These experimental techniques determine the relative frequency of direct physical contacts between genomic regions and have successfully identified EPIs and other long-range interactions (He *et al.*, 2014). However, the ChIA-PET method still has a low signal-to-noise ratio and most available Hi-C data have a low resolution (Fullwood *et al.*, 2009; Rao *et al.*, 2014). In addition, since certain EPIs are condition-specific, experimental EPI data in one sample cannot always be directly applied to infer EPIs in other samples. Here, a “sample” refers to a cell type, a cell line, or a tissue sample under a specific experimental condition. An EPI is called condition-specific, if the interaction only occurs in a specific sample.

As most experimental procedures are expensive, computational methods have been indispensable alternatives for identifying EPIs. These methods employ available genomic and/or epigenomic data to predict EPIs in an inexpensive way. Early methods considered the closest promoter as the only target of an enhancer. However, a study demonstrated that only 40% of enhancers regulate their nearest promoters and one enhancer

may regulate multiple genes (Andersson *et al.*, 2014). Later, several computational approaches were developed based on the correlation of epigenomic signals in enhancers and those in promoters (Corradin *et al.*, 2014; Andersson *et al.*, 2014; Thurman *et al.*, 2012; Ernst *et al.*, 2011). One challenge of using these methods is to find a proper threshold of correlations to reduce false EPI predictions (Roy *et al.*, 2015; Whalen *et al.*, 2016). Recently, supervised learning based methods have been developed, such as IM-PET (He *et al.*, 2014), PETModule (Zhao *et al.*, 2016), RIPPLE (Roy *et al.*, 2015), and TargetFinder (Whalen *et al.*, 2016). These methods commonly use genomic and epigenomic data such as those from DNase I hypersensitive sites sequencing (DNase-seq) and histone modification based chromatin immunoprecipitation followed by massive parallel sequencing (ChIP-seq) to extract features for EPI predictions. IM-PET, RIPPLE and PETModule utilize random forests as their classifier, while TargetFinder is based on boosted trees. These methods either do not consider or have low-performance on condition-specific EPI predictions (Roy *et al.*, 2015).

Here we proposed a computational method for predicting condition-specific EPIs called EPIP. EPIP stands for “Enhancer-Promoter Interaction Prediction”. It is a supervised learning-based approach that utilizes functional genomic and epigenomic data to build a robust model to predict shared and condition-specific EPIs. EPIP can work with missing data, different types of datasets, and even a dataset with a partial list of features. Tested on experimental data from more than eight samples, EPIP reliably predicted condition-specific EPIs and shared EPIs in different samples with the average area under the receiver operating characteristic curve (AUROC) about 0.95, and the average area under the precision-recall curve (AUPR) about 0.73. In addition, we compared EPIP with two state-of-the-art computational methods for predicting EPIs and showed that EPIP outperformed both.

## 2 Materials and Methods

### 2.1 Enhancers and promoters

We obtained all 32693 enhancers annotated by FANTOM from [http://slidebase.binf.ku.dk/human\\_enhancers/results](http://slidebase.binf.ku.dk/human_enhancers/results) (Andersson *et al.*, 2014). We chose this set of enhancers because this was arguably the largest set of enhancers that were defined with the same criteria and supported by experiments. We next overlapped the FANTOM enhancers with the computationally predicted ChromHMM enhancers (Ernst *et al.*, 2011) for samples that had the ChromHMM data available (GM12878, HeLa, HMEC, HUVEC, IMR90 and NHEK). These ChromHMM enhancers were defined with fifteen hidden states (<https://genome.ucsc.edu/cgi-bin/hgTrackUi?g=wgEncodeBroadHmm&db=hg19>). We considered both strong and weak enhancers (states 4-7) as valid ChromHMM enhancers (Ernst *et al.*, 2011). The FANTOM enhancers overlapping with at least one ChromHMM enhancer in a sample were considered as the enhancers for that sample in the following analyses. Since KBM7 does not have any annotated ChromHMM enhancer, all FANTOM enhancers were used for KBM7. An enhancer was considered “active” in a sample if it overlapped with the H3K27ac ChIP-seq peaks in this sample. The H3K27ac peaks were downloaded from ENCODE (Dunham *et al.*, 2012). With no H3K27ac data available for KBM7, all obtained enhancers were considered as “active” enhancers. In this way, we obtained 7023 to 32693 enhancers and 4888 to 32693 active enhancers in a sample (Table S1).

We obtained all annotated transcription start sites (TSSs) from GENCODE V19 (Harrow *et al.*, 2012) and considered the regions between 1 kb upstream and 100 base pairs downstream of the TSSs as “promoters”. This resulted in 57783 promoters. For samples with RNA-Seq data (Dunham *et al.*, 2012) (GM12878, HeLa, HUVEC, IMR90, K562 and

NHEK), we defined promoters as “active” if the corresponding genes had at least 0.30 reads per kb of transcript per million mapped reads with the irreproducible discovery rate of 0.1, similarly as previously (Whalen *et al.*, 2016). For samples without RNA-Seq data (HMEC and KBM7), all promoters were considered as active promoters (Table S2).

### 2.2 Training data

To train EPIP, we defined positive and negative enhancer-promoter pairs (EP-pairs) (i.e. interacting and non-interacting EP-pairs) using the normalized Hi-C contact matrices, which were generated with the Knight and Ruiz normalization vectors by Rao *et al.* (Rao *et al.*, 2014). Rao *et al.* inferred these matrices for the following seven samples: GM12878, HMEC, HUVEC, IMR90, K562, KBM7 and NHEK (GSE63525). They also extracted significant intra-chromosomal chromatin interactions called “looplists” in the above seven samples and the HeLa sample. The number of EP-pairs from the looplists defined at the highest resolution for these samples was too small to train the EPIP model well. We thus defined the positive and negative EP-pairs from their normalized Hi-C contact matrices, as previously (Li *et al.*, 2016; Zhao *et al.*, 2016) (Table S3).

In brief, if an “active” enhancer and an “active” promoter overlapped with a pair of regions that were supported by at least 30 normalized Hi-C reads, we considered this EP-pair as a positive EP-pair. Similarly, an EP-pair was considered as negative if it did not overlap with any pair of regions that were supported by 5 or more normalized Hi-C reads (Figure 1A). The cutoffs, 30 and 5, were chosen based on our test results with different cutoffs (Table S3). In this way, we defined positive and negative EP-pairs for the above seven samples with contact matrices.


To train EPIP, we used both balanced and unbalanced models. We randomly chose 30% of positive EP-pairs and the same number of negative EP-pairs in each of the above seven samples. We then combined these positives and negatives from different samples to train a balanced prediction model. We also combined 30% of positive EP-pairs and ten times randomly-chosen negative EP-pairs in each sample to train an unbalanced prediction model. We then combined the two models into the final EPIP model, which predicts an EP-pair as a “negative” pair only when both models predict this pair as a negative pair and predicts an EP-pair as a positive pair otherwise. This strategy was based on the observation that the balanced model had a high sensitivity and the unbalanced model had a high specificity when tested on the training data by cross-validation. For simplicity’s reason, in the remaining of the paper, we called this final EPIP model as “EPIP”.

### 2.3 Testing data

We tested EPIP on a variety of data (Figure 1B). We tested it on the remaining 70% of positive EP-pairs, together with the same number of randomly selected negative pairs that were not used for training (balanced test data). We also tested it on the remaining 70% of positive EP-pairs together with ten times randomly selected negative pairs that were not used for training (unbalanced test data). We tested EPIP on all EP-pairs within 2 Mb that were not used for training as well. Moreover, we tested EPIP on the positive EP-pairs defined with normalized Hi-C contact matrices under the cutoffs 10, 20, 30, 50, and 100. Finally, we tested EPIP on EP-pairs collected in other studies (Li *et al.*, 2012; Jin *et al.*, 2012; Rao *et al.*, 2014), which were obtained from the strictly-defined interacting regions by the original studies and represented more strictly-defined EP-pairs.

### 2.4 Features of EP-pairs considered

EPIP considers three common features of EP-pairs in every sample. These features are the distance between the enhancer and the promoter in an EP-pair, the conserved synteny score that measures the co-conservation of an

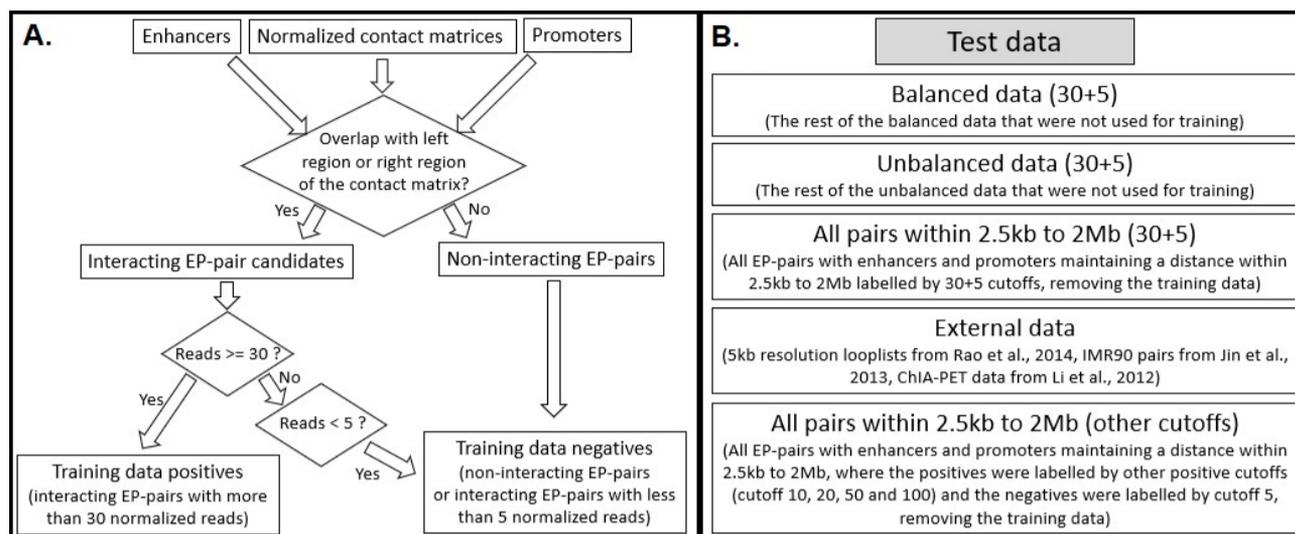

**Fig. 1.** (A) The flowchart of training data creation. Here all the read numbers are normalized. An EP-pair with the enhancer overlapping with one of the two interacting regions and the promoter overlapping with the other of the two interacting regions will be considered as an interacting EP-pair candidate. (B) The five test data sets on which we tested EPIP.

EP-pair in five other vertebrate genomes (chicken galGal3, chimpanzee panTro4, frog xenTro3, mouse mm10 and zebrafish zv9) and the correlation of epigenomic signals in the enhancer region and that in the promoter region of an EP-pair across ENCODE Tiers 1 and 2 samples (Zhao *et al.*, 2016). For simplicity's sake, in the following, these features are called "distance", "css", and "corr", respectively.

In addition, depending on the types of data available in a sample, EPIP considers features from fourteen additional types of data. These include DNase-seq data, ChIP-seq data for nine types of histone modifications (H3K4me1, H3K4me2, H3K4me3, H3K27ac, H3K27me3, H3K36me3, H3K79me2, H3K9ac and H4K20me1) and four types of chromatin factors (CTCF, POL2, RAD21 and SMC3). These data are shown to provide important indicators for predicting EPIs (Roy *et al.*, 2015). For each of the fourteen types of data, EPIP generates two features that correspond to its signals in enhancer regions and its signals in promoter regions (Table S4). The value of a feature for a region corresponds to the "peak strength" value of this feature in its signal peak that overlapped with this region. If a region overlaps with multiple peaks of a feature signal, we considered the average signal value in these overlapping peaks as the feature value for this region. For instance, when H3K4me1 ChIP-seq data is available for an enhancer in a sample, the H3K4me1 feature value for this enhancer is the average peak strength of all H3K4me1 ChIP-seq peaks overlapping with this enhancer. The feature signal peaks and their signal strength are downloaded from ENCODE (Dunham *et al.*, 2012). Due to the difference of available types of data in different samples, we could consider 31, 25, 27, 31, 31, 3 and 27 features in GM12878, HMEC, HUVEC, IMR90, K562, KBM7 and NHEK, respectively, including the three common features (Table S4).

## 2.5 Partitioning feature space to handle missing data

EPIP groups features into eleven partitions or overlapping feature sets (Figure 2A, Table S5). Partitions with overlapping features are used, because in this way, (i) EPIP can be trained and tested on various samples, no matter whether the samples have data for a large or small number of features; (ii) such partitions enable more samples to be used to train each partition and thus likely produce more accurate predictors; and (iii) the trained EPIP model can be used to make predictions in more samples. For instance, samples with a large number of features will benefit from a large

number of partitions, while EPIP can still make predictions for samples with a small number of features.


In brief, EPIP considers the three common features: distance, css, and corr, as a partition, which shows the static genomic information of EPIs. Moreover, EPIP considers the above three common features together with features from each of the following feature groups as a different partition: H3K4me1; DNase-seq; H3K4me1 and H3K27ac; DNase-seq and H3K27ac; H3K4me1 with H3K27ac and H3K4me3; DNase-seq with H3K27ac and H3K4me3; H3K4me1-3 together with H3K27ac and DNase-seq (Table S5). Note that for every histone modification mark, EPIP considers its signal values in enhancers and in promoters. Therefore, the above partitions have two features for every histone modification mark (such as H3K4me1\_P and H3K4me1\_E for the mark H3K4me1 in promoters and enhancers, respectively). Finally, EPIP considers the largest sets of features that are not considered above and occur in at least one training sample as additional partitions (Figure 2B).

## 2.6 An ensemble approach to predict condition-specific EPIs under a variety of conditions

We developed an ensemble method called EPIP to distinguish positive from negative EP-pairs (Figure 2A). The method uses the training data to train the model iteratively, based on the idea of AdaBoost (Polikar *et al.*, 2000). The details are in the following paragraphs.

With the above partitions of features, EPIP trains an incremental learner for every partition. An incremental learner consists of a number of weak learners trained on the training data. The weak learners in EPIP are decision tree classifiers. We set a maximum allowed depth of ten for the decision trees to avoid overfitting, after testing on several depth options. For a given partition and a corresponding sample, EPIP trains 200 weak learners, because 200 is the smallest number that gives EPIP the highest AUROC and AUPR scores (Figure S1). With weak learners trained on data from all samples with the required features by the corresponding partition, the corresponding incremental learner combines predictions from all its weak learners through a majority voting. EPIP then combines the predictions by the trained incremental learners from all partitions by a majority voting (Figure 2A).

EPIP trains weak learners iteratively. Given a partition and a sample with the required features by this partition, the first weak learner is trained

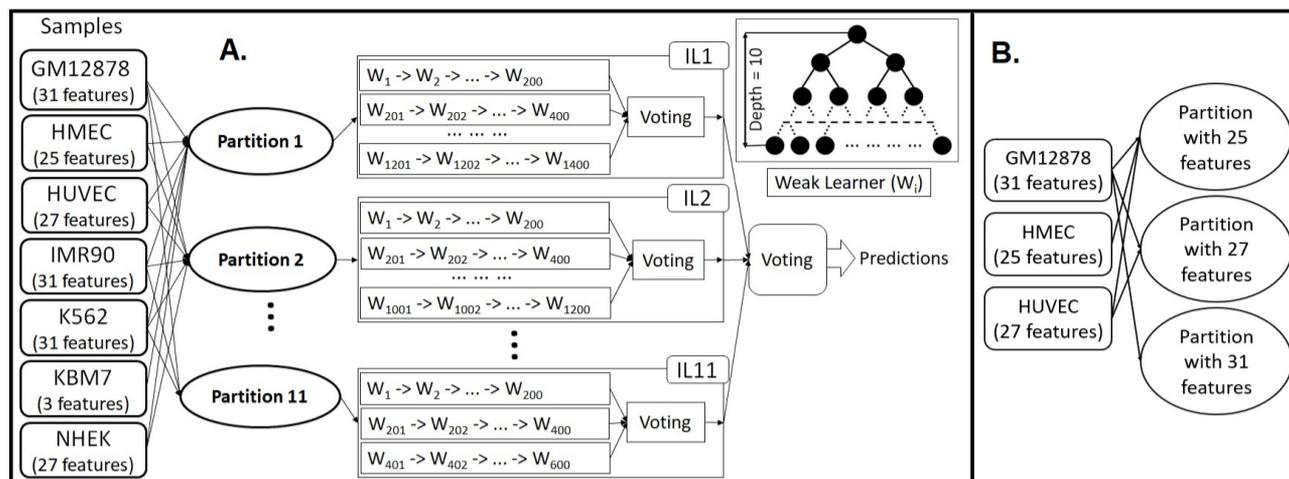

**Fig. 2.** (A) The training process of EPIP. There are three types of partitions and in total 11 partitions used. Samples with the features required by a partition are used to train the corresponding incremental learner (IL) for this partition. Each incremental learner trains a maximum 200 weak learners (W) for a sample. The weak learners trained from all available samples then vote to make the predictions for the corresponding incremental learner. The prediction of all incremental learners determines the final prediction with another voting process. (B) An example of the third type of partitions from three samples. The 25 features in HMEC are included in the 27 features in HUVEC, which are included in the 31 features in GM12878.

with equal weight to all data points (i.e. all EP-pairs) in the training data in this sample. The second weak learner is then trained with the same input data points but with increased weights to the misclassified data points and decreased weight to the correctly classified data points by the first weak learner. The modified weights to the data points are calculated according to the AdaBoost algorithm, based on the prediction errors and the average weights of the misclassified data points by the previous weak learners (Freund *et al.*, 1997). Similarly, the third weak learner is trained with the same input data points but with increased weights to the misclassified data points and decreased weight to the correctly classified data points by the first two weak learners. This process is repeated again and again until the 200th weak learner is trained.

With a new sample that has at least a subset of the aforementioned fourteen types of data, EPIP is able to learn from this sample without retraining the whole model. EPIP identifies the partitions applicable to the new sample. For these partitions, similarly as above, the corresponding incremental learners learn the new training sample by an additional set of 200 weak learners iteratively trained with the new training data. EPIP then combines the predictions from the updated incremental learners and the originally trained incremental learners by the majority voting.

## 2.7 Comparison with TargetFinder and Ripple

TargetFinder predicted EPs in six samples (GM12878, HeLa, HUVEC, IMR90, K562 and NHEK) (Whalen *et al.*, 2016). It provided positive and negative EP-pairs used, together with its prediction by four classifiers (<https://github.com/shwhalen/targetfinder>). One of the classifiers, gradient boosting (gbm), showed a better precision and recall than the other three classifiers. We thus compared EPIP with TargetFinder by running EPIP and TargetFinder (gbm) on both the TargetFinder data and EPIP data.

Ripple uses a combination of random forests and group LASSO in a multi-task learning framework (Roy *et al.*, 2015). It uses different types of data such as DNase-seq, ChIP-seq, and RNA-Seq data to extract features. RIPPLE is trained on multiple samples and is capable of predicting condition-specific interactions in a new sample. Its training and test data were based on the 5C (GSE39510) and Hi-C (GSE63525) datasets. We compared EPIP with Ripple by running them on EPIP data and the above TargetFinder data in three shared samples (GM12878, HeLa, and K562). We did not compare them on the Ripple data, as (i) the Ripple data is

balanced, which does not represent the reality well, where we often have much more negatives than positive EP-pairs; (ii) the resolution of the Ripple data is low, where a promoter within 2.5 kb of a pair of interacting regions may be considered as the targets of one of the regions; and (iii) the data barely overlap with any FANTOM enhancer.

We used the 10-fold cross-validation method to train and test EPIP, TargetFinder and Ripple, similarly as that in the TargetFinder study and in the Ripple study. We used the generate\_training.py in TargetFinder to generate TargetFinder features for EP-pairs. Then we used the procedure mentioned in its readme file to apply the 10-fold cross-validation on the training data using GradientBoostingClassifier (GBM). In terms of Ripple, we used the genFeatures tool in Ripple to generate features for EP-pairs. Then we used its runAllfeatures\_crosscellline.m Matlab code to apply 10-fold cross-validation on the training data.

## 3 Results

### 3.1 EPIP reliably predicts EPs

We tested EPIP on the balanced test data, unbalanced test data, all EP-pairs within 2.5 kb to 2 Mb, EP-pairs defined with different normalized Hi-C contact number cutoffs, and EP-pairs from other studies. EPIP reliably predicted untrained EPs in all datasets, with a high AUROC, AUPR and/or F1 score (Table 1, Table S6-S8). The AUROC, AUPR and the F1 score were calculated using the scikit-learn libraries (Pedregosa *et al.*, 2011).

We studied the performance of EPIP on the balanced test data, the unbalanced test data, and all EP-pairs within 2.5 kb to 2 Mb (Material and Methods). No EP-pair in these test data was used for training. With five sets of randomly chosen training data and the corresponding test data, on average, EPIP had an AUROC of 0.96, 0.96, and 0.95; an AUPR of 0.96, 0.92, and 0.73; an F1 score of 0.99, 0.95, and 0.51 for the balanced, unbalanced, and all EP-pairs within 2.5 kb to 2 Mb test data, respectively (Table 1 and S6). Note that the F1 score on the third test data was not bad, given the fact that the number of negatives was around 13 times the number of positives here. In this test dataset, the recall in all samples was higher than 0.92, although KBM7 had no epigenomic data. The average precision was 0.34 in these samples, with the largest precision in GM12878, where the Hi-C sequencing depth was the highest. The much higher precision and F1 score in GM12878 suggests that the estimated precision and F1 scores may be underestimated in other samples, as the lower sequencing

Table 1. The performance of EPIP on all pairs within 2.5kbp and 2Mb, balanced and unbalanced test data.

Cell line	AUROC	AUPR	F1	Precision	Sensitivity/Recall
GM12878	0.9007 (0.994,0.9941)	0.8502 (0.9939,0.9541)	0.9337 (0.9942,0.9862)	0.8772 (0.9979,0.979)	0.9979 (0.9906,0.9936)
HMEC	0.9872 (0.9962,0.9981)	0.9038 (0.9963,0.9929)	0.4287 (0.9893,0.9415)	0.2733 (0.9873,0.8955)	0.9938 (0.9913,0.9925)
HUVEC	0.9842 (0.9943,0.9934)	0.8904 (0.9952,0.9807)	0.3081 (0.9844,0.9369)	0.1824 (0.987,0.8978)	0.9915 (0.9818,0.9796)
IMR90	0.9963 (0.9985,0.9981)	0.9894 (0.9989,0.995)	0.6365 (0.9933,0.9577)	0.4672 (0.9921,0.9247)	0.9985 (0.9946,0.9932)
K562	0.9947 (0.9985,0.9986)	0.9874 (0.9988,0.9939)	0.5589 (0.9884,0.9486)	0.3887 (0.9909,0.9141)	0.9938 (0.9859,0.9859)
KBM7	0.9856 (0.9856,0.9861)	0.9285 (0.9876,0.9509)	0.5317 (0.9864,0.9328)	0.3629 (0.9876,0.8905)	0.994 (0.9852,0.9793)
NHEK	0.9942 (0.9979,0.9981)	0.9394 (0.9982,0.9939)	0.4485 (0.9892,0.9406)	0.2897 (0.9899,0.8969)	0.9926 (0.9885,0.9887)

The scores for all pairs within 2.5kbp to 2Mb are shown as the first value. The scores for balanced and unbalanced data are shown in parenthesis.

depth in other samples that may prevent from labeling many true positive pairs as positives while these positives were indeed predicted as positives by EPIP. We also tested EPIP on condition-specific EP-pairs within 2.5 kb to 2 Mb. EPIP predicted 12455 (99.26%) of the 12548 condition-specific EP-pairs in the seven samples that were not used for training.

Since the above test datasets were based on the cutoffs 30 and 5, which were not rigorously determined, we tested EPIP on more strictly-defined EP-pairs. We tested EPIP on EP-pairs defined with the looplists at 5 kb resolution Hi-C data by Rao et al. (Rao *et al.*, 2014), the Hi-C data for IMR90 published by Jin et al. (Jin *et al.*, 2012) and the ChIA-PET data for K562 and MCF7 (Li *et al.*, 2012). **The EP-pairs were similarly obtained by overlapping “active” enhancers and “active” promoters with the strictly-defined interacting regions in these studies. On average, EPIP had a precision of 0.90, 0.89, and 0.93, respectively; a recall of 0.83, 0.81, and 0.89, respectively; and an F1 score of 0.86, 0.85 and 0.91, respectively (Figure 3 and Table S7).** Note that although EPIP was not trained on MCF7, EPIP correctly predicted 89.70% of EPs in MCF7.

We also tested EPIP on all EP-pairs within 2.5 kb to 2 Mb with positives defined by different cutoffs (Table S8). We found that when the cutoff was increasing, overall, the AUROC was increasing while the AUPR and the F1 scores were decreasing. This was due to the fact that the number of negatives was the same for different cutoffs, while the number of positive EP-pairs was decreased with the larger cutoffs. Under all cutoffs, the recall (sensitivity) was larger than 0.92 and was increasing with the increment of the cutoff, **suggesting that the trained EPIP model was robust and reliable to predict true positive EP-pairs. This was because although EPIP was trained with data under the cutoff 30, it predicted the vast majority of “positive” EP-pairs under different cutoffs and became more accurate when tested on more “strictly-defined” positive EP-pairs.** The average specificity was 0.80 and unchanged under different cutoffs, since the negative EP-pairs were the same. The average precision was decreasing from 0.76 at the cutoff 10 to 0.09 at the cutoff 100. The dramatically decreasing precision suggested that the larger cutoffs such as 50 and 100 were likely too stringent and the cutoff 30 may be more proper to define positives, given the fact that EPIP had good precision and recall on more strictly-defined EP-pairs from the above three previous studies (Figure 3).

In summary, EPIP reliably predicted EPs especially condition-specific ones. Its high precision, recall, and F1 scores were demonstrated with the published datasets from previous studies. The more realistic measurement of its AUROC and AUPR may come from the test data with all EP-pairs defined with the cutoffs 30 and 5, supported by our analyses with the published datasets and different cutoffs. In this case, EPIP on average had an AUROC of 0.95 and an AUPR of 0.73.

### 3.2 EPIP reliably predicts condition-specific EPs in new samples

We studied the performance of EPIP on predicting EP-pairs especially condition-specific ones in new samples. We trained one EPIP model on

EP-pairs in every group of six samples and then tested the model on the remaining sample, for each of the seven samples with a normalized Hi-C contact matrix. **Following the same way we obtained the EPIP model, we defined the training positive and negative EP-pairs with the cutoffs 30 and 5, and obtained the EPIP model with the combination of the balanced and unbalanced models trained on the corresponding six samples.**

Trained similarly as above on positive pairs and two sets of negative pairs from six samples, on average, EPIP had an AUROC of 0.96, an AUPR of 0.89, on the seventh sample, when tested on all EP-pairs within 2.5 kb to 2 Mb based on the cutoffs 30 and 5 (Tables 2 and S8). In terms of condition-specific EP-pairs, which only occurred in the seventh sample, on average, EPIP predicted 5498 (97.66%) of 5630 condition-specific EP-pairs in seven samples except for GM12878. EPIP predicted only 31.77% of condition-specific EP-pairs in GM12878 (Table 2).

We hypothesized that the low performance in GM12878 was likely due to the fact that the Hi-C sequencing depth was much higher in GM12878 than that in other samples. In other words, the quality of the EP-pairs in other samples was different from that in GM12878. To test this hypothesis, **we applied the same EPIP model trained on other six samples based on the cutoffs 30 and 5 to test condition-specific EP-pairs defined with the cutoff 100 in GM12878.** We found that EPIP correctly predicted 2396 (78.69%) of 3045 condition-specific EP-pairs in GM12878 (Table S9). Therefore, EPIP indeed can reliably predict condition-specific EP-pairs in new samples, with an accuracy of 91.00% (7894 out of 8675 condition-specific EPs) in all seven samples

### 3.3 EPIP performs better than the state-of-the-art methods TargetFinder and Ripple

We compared EPIP with two recently published methods, TargetFinder and Ripple. We compared them on the TargetFinder data and the EPIP all EP-pair test data within 2 kb to 2 Mb. EPIP showed better performance than TargetFinder and Ripple (Table 3).

First, we compared EPIP with TargetFinder and Ripple on the data from TargetFinder (Tables 3 and S10). For the six samples in TargetFinder data (GM12878, HeLa, HUVEC, IMR90, K562 and NHEK), on average, EPIP had an AUROC, AUPR, F1, precision, recall and specificity of 0.95, 0.84, 0.64, 0.98, 0.48 and 1.00, respectively. TargetFinder had an AUROC, AUPR, F1, precision, recall and specificity of 0.92, 0.59, 0.50, 0.72, 0.39 and 0.99 respectively (Table 3). Ripple had an AUROC, AUPR, F1, precision, recall and specificity of 0.75, 0.19, 0.02, 0.75, 0.01 and 1.00 respectively (Table 3). The poor performance of Ripple may be due to the fact that Ripple could not deal with unbalanced data well, although the real data are always unbalanced in practice.

Next, we compared EPIP with TargetFinder and Ripple on all EP-pairs test data within 2.5 kb to 2 Mb (Tables 3 and S11). For the five samples shared with the TargetFinder study (GM12878, HUVEC, IMR90, K562, NHEK), on average, EPIP had an AUROC, AUPR, F1, precision, recall and specificity of 1.00, 0.98, 0.99, 0.99, 1.00 and 1.00, respectively. Based

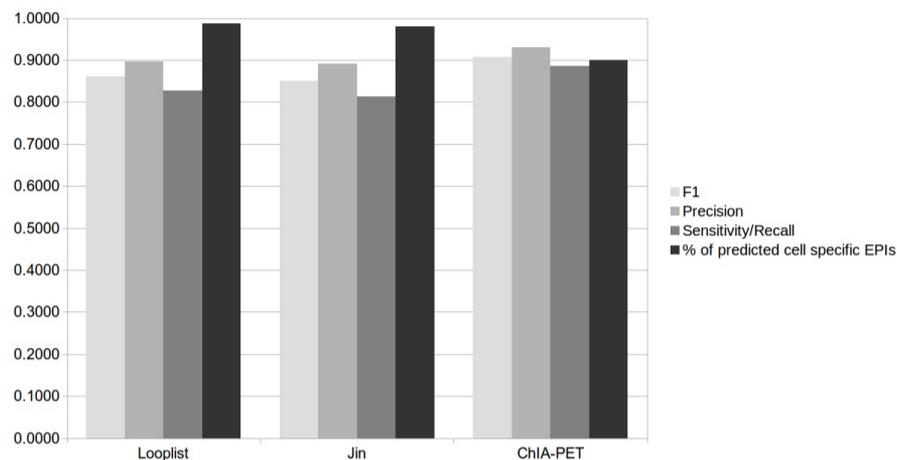


Fig. 3. The overall performance of EPIP on external datasets.

Table 2. The performance of cell specific EPIP models on all pairs within 2.5kbp to 2Mb.

Cell line	AUROC	AUPR	F1	Precision	Sensitivity/Recall	# of cell specific EPs	% of predicted cell specific EPs
GM12878	0.9873	0.9835	0.9385	0.9946	0.8885	58765	0.9975
HMEC	0.9951	0.9905	0.7664	0.6256	0.9889	42	0.8333
HUVEC	0.9920	0.9816	0.6955	0.5387	0.9810	73	0.8767
IMR90	0.9979	0.9960	0.9286	0.8714	0.9938	2781	0.9960
K562	0.9955	0.9921	0.9093	0.8421	0.9881	1178	0.9677
KBM7	0.9892	0.9826	0.8431	0.7377	0.9836	2004	0.9880
NHEK	0.9942	0.9791	0.7675	0.6275	0.9879	102	0.8235

The number and percentage of cell specific EP-pairs predicted are also shown in the last two columns.

on the predictions from its best model, GBM, on average, TargetFinder had an AUROC, AUPR, F1, precision, recall and specificity of 0.96, 0.87, 0.86, 0.94, 0.79 and 0.98, respectively. To find out how Ripple performed on the same data set, we considered the 23808 positive and 52313 negative EP-pairs in two common samples (GM12878 and K562) with the promoters and enhancers used in Ripple predictions. Ripple showed an AUROC, AUPR, F1, precision, recall and specificity of 0.66, 0.39, 0.36, 0.61, 0.25 and 0.93, respectively, while EPIP showed a much better AUROC, AUPR, F1, precision, recall and specificity of 1.00, 1.00, 1.00, 0.99, 1.00 and 1.00 respectively, on the same dataset.

Next, we compared EPIP with TargetFinder and Ripple on condition-specific EPs in TargetFinder data. EPIP predicted 51.36% of the 8471 condition-specific EP-pairs in the six samples, while TargetFinder predicted 38.85% of the 8471 condition-specific EP-pairs (Table S10). Ripple predicted only 0.53% of the 5787 condition-specific EP-pairs in the three samples shared by the Ripple study and the TargetFinder study (GM12878, HeLa and K562), while EPIP predicted 54.42% of the same 5787 EP-pairs (Table S10). The accuracy of EPIP on condition-specific EP-pairs here was much lower compared with that on EPIP test data, which may be because the TargetFinder data were not in good quality. For instance, enhancers and promoters used by TargetFinder were from computational predictions (Ernst *et al.*, 2012; Hoffman *et al.*, 2012), which were prone to errors. Moreover, almost 50% of their enhancers and promoters overlap with their promoters and enhancers, respectively. In addition, the negative EP-pairs in TargetFinder data were problematic. TargetFinder labeled an EP-pair “negative”, if it did not overlap with Rao *et al.* looplists of any resolution. Due to the limited sequencing resolution and the limitation of the algorithms to analyze raw Hi-C reads to generate

looplists, EP-pairs not identified as looplists are not necessarily negative pairs (Forcato *et al.*, 2017).

Finally, we compared EPIP with TargetFinder and Ripple on condition-specific EPs on EPIP test data. EPIP predicted 99.99% of the condition-specific EP-pairs in five common samples shared with the TargetFinder study. TargetFinder predicted only 83.91% of these condition-specific EP-pairs (Table S11). In the two common samples shared with the Ripple study, EPIP predicted 99.99% of the condition-specific EP-pairs, while Ripple only could predict 27.07% of them (Table S11).

## 4 Discussion

Identifying EPs is important for the study of gene transcriptional regulation. Although several computational methods are available to predict EPs, they often cannot predict condition-specific EPs and their performance is still not satisfactory. We thus developed a computational method, EPIP, to learn the patterns of EPs and to predict condition-specific EPs. We demonstrated that, on average, EPIP correctly predicts 99.26% of condition-specific EPs in different samples. We also showed that EPIP has a much better performance than two state-of-the-art computational methods.

EPIP provides an important framework to integrate useful data for EPI predictions. EPIP has a partitioning method that enables it to use samples with partially available features and samples with abundant types of data. Therefore, it can be trained on various types of samples and thus makes the training model more accurate and more representative. In addition, the

Table 3. The performance comparison between EPIP with TargetFinder and Ripple for the two types of data considered.

		# Pos	# Neg	F1	Precision	Sensitivity/Recall
TargetFinder data	EPIP vs TargetFinder	1394	197	0.9018 (0.6433)	0.9182 (0.997)	0.8859 (0.4749)
	EPIP vs Ripple	67	18	0.8824 (0.275)	0.8696 (0.8462)	0.8955 (0.1642)
EPIP data	EPIP vs TargetFinder	912	197	0.9431 (0.2507)	0.8924 (0.985)	1 (0.1436)
	EPIP vs Ripple	3230	79867	0.917 (0.2271)	0.8474 (0.7238)	0.9991 (0.1347)

F1, Precision and Sensitivity/Recall columns show the EPIP score first, and TargetFinder or Ripple score in parenthesis.

learning approach in EPIP provides the opportunity to efficiently train the model when new data become available.

EPIP is trained with different samples. This means that data from different samples are fed to the training model in a specific order. To investigate whether the order of the samples in training has an impact on the performance of EPIP, we considered HUVEC as the testing sample and trained the EPIP model on the remaining six samples in all possible 120 orders. We observed that the order of the samples used in training EPIP does not significantly impact the final performance, as the standard deviation of the AUROC and the F1 score was 0.001 and 0.002, respectively, for all 120 different orders of training in these experiments.

We used FANTOM enhancers to define EP-pairs in this study. The number of FANTOM enhancers is small compared with the known and predicted enhancers in various studies (Ernst et al., 2012). However, FANTOM enhancers arguably represent the largest set of enhancers we have so far that are defined with the same criteria and supported by experiments. We further overlapped FANTOM enhancers with ChromHMM enhancers and H3K27ac ChIP-seq peaks to define active enhancers, which is likely to generate more reliable enhancers and more reliable training data. However, the choice of the FANTOM enhancers may have prevented us from testing EPIP more generally, since we only tested EPIP on EP-pairs based on FANTOM enhancers. When there is a larger and more reliable set of experimentally determined enhancers available in the future, it is necessary to test EPIP on the EP-pairs based on the new set of enhancers to make sure that it performs similarly.

We tried to train EPIP on EP-pairs from Rao et al. looplists, which generated suboptimal models due to the much smaller size of training data (Tables S12 and S13). Instead, we used the cutoffs 30 and 5 to define positive and negative EP-pairs. We selected this combination of cutoffs based on our testing with different cutoffs and our previous studies (Li et al., 2016; Zhao et al., 2016). Note that these EP-pairs defined by this combination of cutoffs are imperfect. First, available methods to analyze Hi-C contact matrices are still suboptimal (Forcato et al., 2017), which prevents from defining accurate interacting regions. Second, the interacting regions we used are either too strict (such as Rao et al. looplists) or containing false positives and/or negatives (such as those from the cutoff 30), which affects the quality of the obtained EP-pairs. Third, as mentioned above, the FANTOM enhancers only represent a portion of existing enhancers while the ChromHMM enhancers are not so reliable. We chose to use these enhancers together with the H3K27ac peaks to define active enhancers, which may miss true positive EP-pairs. Finally, a fixed cutoff of 30 does not consider the exponential decay of the number of supporting Hi-C reads with the increasing distance between enhancers and promoters, which may miss true positive EP-pairs as well.

Despite these limitations of the enhancers and EP-pairs, we believe that the majority of the positives and negatives in our training and test datasets are true positives and true negatives, respectively. This is because EPIP performed well on more strictly-defined EP-pairs based on interacting regions defined by other studies instead of the cutoffs (Table S7). Moreover, EPIP always had a high recall/sensitivity to predict the “true” positive EP-pairs when different cutoffs were used to define positive EP-pairs. Finally,

EPIP performed well when tested on the remaining 70% of untrained EP-pairs, suggesting that the positive EP-pairs indeed are different from the negatives (Table S6).

Although this combination of cutoffs 30 and 5 was good, it may be likely that we can do better with sample-specific cutoffs to define positives. We did increase the cutoff to 50, 100, and 150 in GM12878 to define positives. Our rationale was that the sequencing depth in GM12878 was higher, which may result in certain negative pairs with a large number of supporting Hi-C reads. However, it turned out that the trained model based on these EP-pairs (positives defined with the cutoff 100 in GM12878 and 30 in other samples, negatives defined with the cutoff 5 in all samples) did not perform better than the above-trained model based on the cutoffs of 30 and 5 (Tables S12 and S13).

Although EPIP has better performance compared with the state-of-the-art methods, there is still room for improvement. For instance, different experimental methods are available to identify EPIs, such as Hi-C, ChIA-PET, and 5C. We used Hi-C for extracting training data. It is worth studying how the performance of EPIP improves if we train EPIP with EPIs from other sources together with Hi-C. Moreover, we used chromatin loops extracted by Rao et al. to define significant interactions. Developing a method that is able to extract interactions from raw Hi-C data may help to improve the performance of EPIP. In addition, like all most all existing methods, EPIP considers one EP-pair at a time to predict interacting EP-pairs while considering multiple EP-pairs may help the discovery of true positive EP-pairs, as shown in a previous study (Zhao et al., 2016). In the future, we will work on these directions together with others to further improve the accuracy of the EPI prediction

## Funding

This work has been supported by the National Science Foundation [grants 1356524, 1661414 and 1149955] and the National Institute of Health [grant R15GM123407]. Funding for open access charge: The National Science Foundation grant 1149955.

## References

- Andersson,R., Gebhard,C., Miguel-Escalada,I., Hoof,I., Bornholdt,J., Boyd,M., Chen,Y., Zhao,X., Schmidl,C. and Suzuki,T. (2014) An atlas of active enhancers across human samples and tissues, *Nature*, **507**, 455-461.
- Cai,X., Hou,L., Su,N., Hu,H., Deng,M. and Li,X. (2010) Systematic identification of conserved motif modules in the human genome, *BMC genomics*, **11**, 567.
- Corradin,O., Saiakhova,A., Akhtar-Zaidi,B., Myeroff,L., Willis,J., Cowper-Sal,R., Lupien,M., Markowitz,S. and Scacheri,P.C. (2014) Combinatorial effects of multiple enhancer variants in linkage disequilibrium dictate levels of gene expression to confer susceptibility to common traits, *Genome research*, **24**, 1-13.
- De Laat,W. and Duboule,D. (2013) Topology of mammalian developmental enhancers and their regulatory landscapes, *Nature*, **502**, 499-506.
- Dekker,J., Rippe,K., Dekker,M. and Kleckner,N. (2002) Capturing chromosome conformation, *Science*, **295**, 1306-1311.
- Dunham,I., Kundaje,A., et al. (2012) An integrated encyclopaedia of DNA elements in the human genome, *Nature*, **489(7414)**, 57-74.
- Ernst,J. and Kellis,M. (2012) ChromHMM: automating chromatin-state discovery and characterization, *Nature methods*, **9**, 215-216.

- Ernst,J., Kheradpour,P., Mikkelsen,T.S., Shores,N., Ward,L.D., Epstein,C.B., Zhang,X., Wang,L., Issner,R. and Coyne,M. (2011) Mapping and analysis of chromatin state dynamics in nine human samples, *Nature*, **473**, 43-49.
- Forcato M, Nicoletti C, Pal K, Livi CM, Ferrari F, Bicciato S. (2017) Comparison of computational methods for Hi-C data analysis, *Nat Methods*, **14**, 679-685.
- Freund Y., Schapire R. E. (1997) A Decision-Theoretic Generalization of On-Line Learning and an Application to Boosting., *Journal of Computer and system sciences*, **55**, 119-139.
- Fullwood,M.J., Liu,M.H., Pan,Y.F., Liu,J., Xu,H., Mohamed,Y.B., Orlov,Y.L., Velkov,S., Ho,A. and Mei,P.H. (2009) An oestrogen-receptor- $\beta$ -bound human chromatin interactome, *Nature*, **462**, 58-64.
- Harrow,J., Frankish,A., Gonzalez,J.M., Tapanari,E., Diekhans,M., Kokocinski,F., Aken,B.L., Barrell,D., Zadissa,A. and Searle,S. (2012) GENCODE: the reference human genome annotation for The ENCODE Project, *Genome research*, **22**, 1760-1774.
- He,B., Chen,C., Teng,L. and Tan,K. (2014) Global view of enhancer-promoter interactome in human cells, *Proceedings of the National Academy of Sciences*, **111**, E2191-E2199.
- Hoffman,MM., Buske,OJ., Wang,J., Weng,Z., Bilmes,JA., Noble,WS. (2012) Unsupervised pattern discovery in human chromatin structure through genomic segmentation, *Nat Methods*, **9**(5), 473-476.
- Jin,F., Li,Y., Dixon,J.R., Selvaraj,S., Ye,Z., Lee,A.Y., Yen,C.A., Schmitt,A.D., Espinoza,C.A. and Ren,B. (2013) A high-resolution map of the three-dimensional chromatin interactome in human cells, *Nature*, **503**, 290-294.
- Li,G., Ruan,X., Auerbach,R.K., Sandhu,K.S., Zheng,M., Wang,P., Poh,H.M., Goh,Y., Lim,J. and Zhang,J. (2012) Extensive promoter-centered chromatin interactions provide a topological basis for transcription regulation, *Cell*, **148**, 84-98.
- Li,X., Zheng,Y., Hu,H. and Li,X. (2016) Integrative analyses shed new light on human ribosomal protein gene regulation, *Scientific reports*, **6**, 28619.
- Mora,A., Sandve,G.K., Gabrielsen,O.S. and Eskeland,R. (2015) In the loop: promoter-enhancer interactions and bioinformatics, *Briefings in bioinformatics*, **17**, 980-995.
- Pedregosa,F., Varoquaux,G., Gramfort,A., Michel,V., Thirion,B., Grisel,O., Blondel,M., Prettenhofer,P., Weiss,R. and Dubourg,V. (2011) Scikit-learn: Machine learning in Python, *Journal of Machine Learning Research*, **12**, 2825-2830.
- Polikar,R., Udpa,L., Udpa,S.S. and Honavar,V. (2000), Acoustics, Speech, and Signal Processing, 2000. ICASSP'00. Proceedings, 2000 *IEEE International Conference on. IEEE*, Vol. 6, pp. 3414-3417.
- Rao,S.S., Huntley,M.H., Durand,N.C., Stamenova,E.K., Bochkov,I.D., Robinson,J.T., Sanborn,A.L., Machol,I., Omer,A.D. and Lander,E.S. (2014) A 3D map of the human genome at kilobase resolution reveals principles of chromatin looping, *Cell*, **159**, 1665-1680.
- Roy,S., Siahpirani,A.F., Chasman,D., Knaack,S., Ay,F., Stewart,R., Wilson,M. and Sridharan,R. (2015) A predictive modeling approach for cell line-specific long-range regulatory interactions, *Nucleic acids research*, **43**, 8694-8712.
- Thurman,R.E., Rynes,E., Humbert,R., Vierstra,J., Maurano,M.T., Haugen,E., Sheffield,N.C., Stergachis,A.B., Wang,H. and Vernot,B. (2012) The accessible chromatin landscape of the human genome, *Nature*, **489**, 75-82.
- Whalen,S., Truty,R.M. and Pollard,K.S. (2016) Enhancer-promoter interactions are encoded by complex genomic signatures on looping chromatin, *Nature genetics*, **48**, 488-496.
- Zhao,C., Li,X. and Hu,H. (2016) PETModule: a motif module based approach for enhancer target gene prediction, *Scientific Reports*, **6**, 30043.
- Zheng,Y., Li,X. and Hu,H. (2014) Comprehensive discovery of DNA motifs in 349 human cells and tissues reveals new features of motifs, *Nucleic acids research*, **43**, 74-83.