

CNT 4714: Enterprise Computing

Spring 2012

Introduction to JavaServer Pages (JSP) – Part 3

Instructor : Dr. Mark Llewellyn
markl@cs.ucf.edu
HEC 236, 407-823-2790
<http://www.cs.ucf.edu/courses/cnt4714/spr2012>

Department of Electrical Engineering and Computer Science
Computer Science Division
University of Central Florida




A JSPs Conversion To A Servlet

- As shown in the diagram of the lifecycle of a JSP shown in part 2 (page 2), a JSP is converted into a servlet during execution.
- While the converted servlet looks very similar in nature to those we have already seen, there are some differences.
- Within Tomcat, the servlet version of the JSP is stored in the work directory (see part 2, page 12).
- The exact directory within the work directory depends in part on your Tomcat set-up and in part on your web-application structure. The next slide illustrates the location of the servlet files that were generated for the ComputeLoan.jsp and ComputeLoan2.jsp applications that appeared in part 2 of the notes on pages 7 and 13 respectively.



Servlet Versions of JSPs in Tomcat

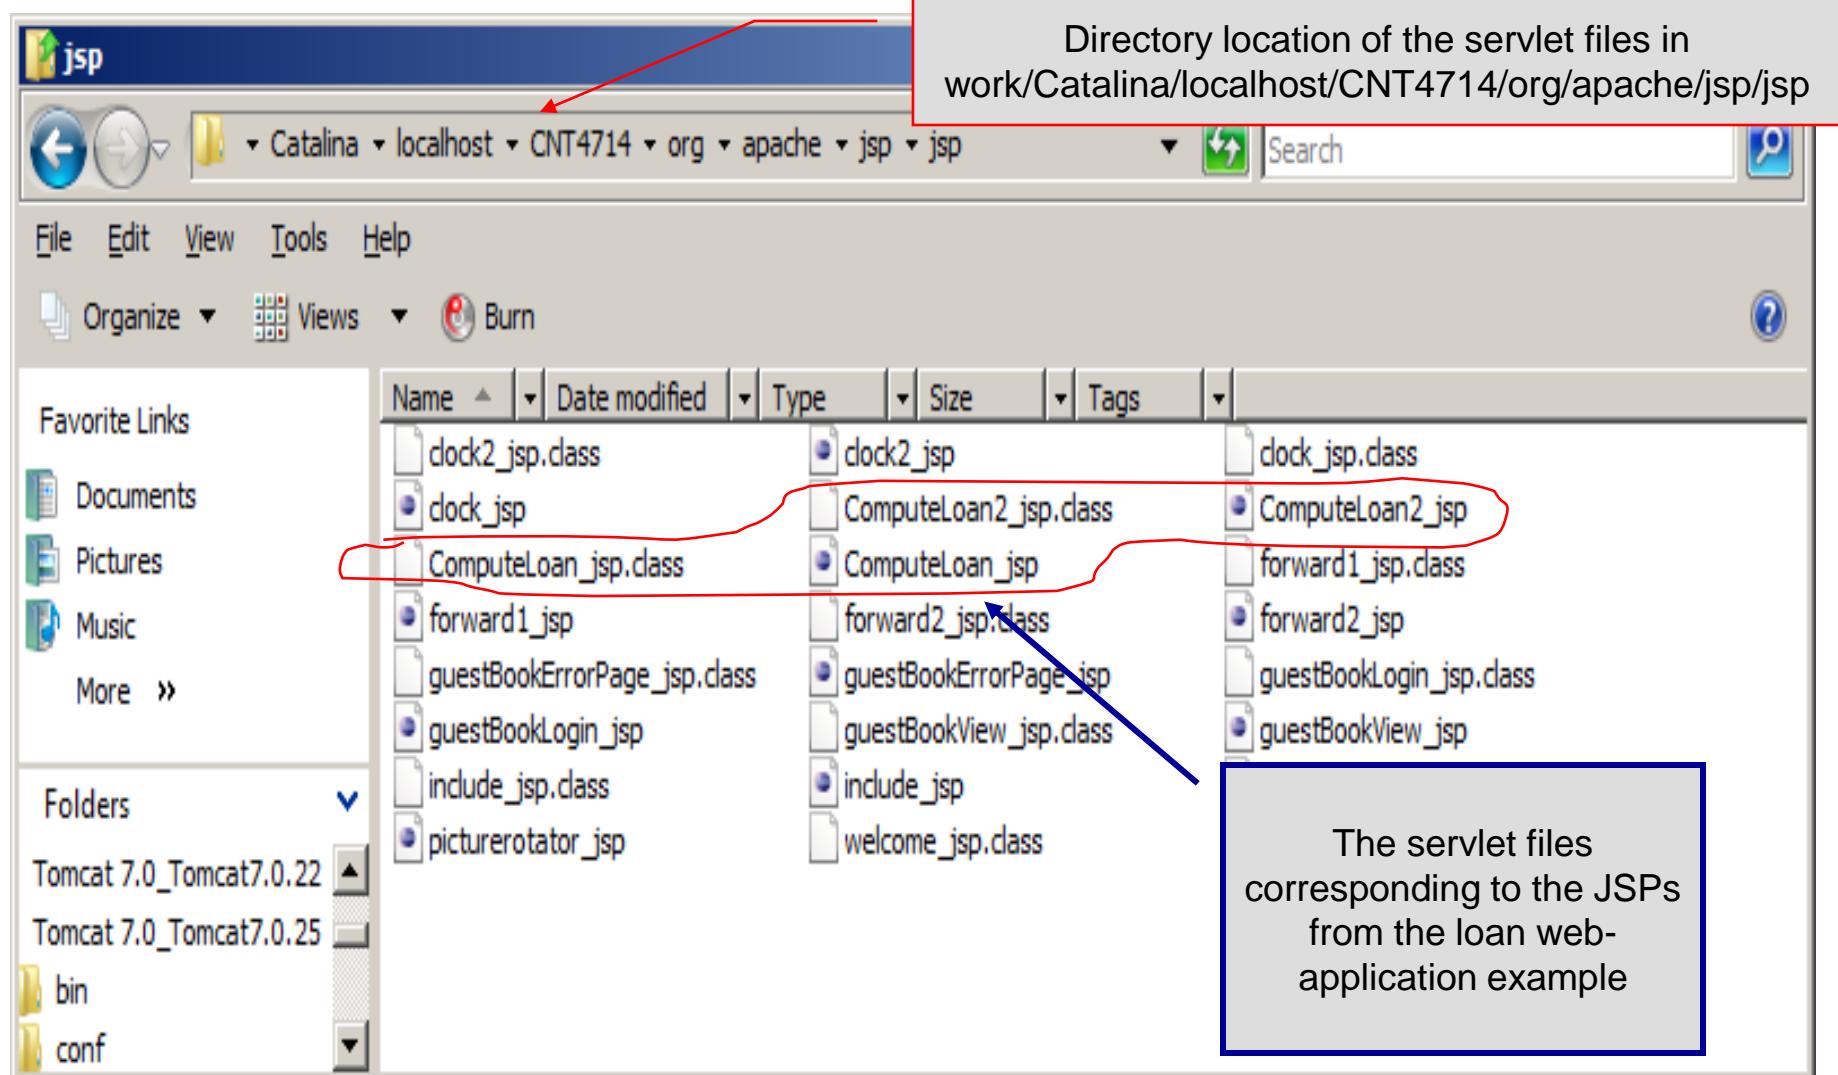

The Converted JSP - Servlet Version

```
package org.apache.jsp.jsp;  
  
import javax.servlet.*;  
import javax.servlet.http.*;  
import javax.servlet.jsp.*;  
  
public final class ComputeLoan_jsp extends org.apache.jasper.runtime.HttpJspBase  
    implements org.apache.jasper.runtime.JspSourceDependent {  
  
    private static java.util.Vector _jspx_dependants;  
  
    public java.util.List getDependants() {  
        return _jspx_dependants;  
    }  
  
    public void _jspService(HttpServletRequest request, HttpServletResponse response)  
        throws java.io.IOException, ServletException {  
  
        JspFactory _jspxFactory = null;  
        PageContext pageContext = null;  
        HttpSession session = null;  
        ServletContext application = null;  
        ServletConfig config = null;  
        JspWriter out = null;  
        Object page = this;
```

ComputeLoan

Note that this package is reflected in the location shown in the previous slide.



```

Object page = this;
JspWriter _jspx_out = null;
PageContext _jspx_page_context = null;

try {
    _jspxFactory = JspFactory.getDefaultFactory();
    response.setContentType("text/html");
    pageContext = _jspxFactory.getPageContext(this, request, response, null, true, 8192, true);
    _jspx_page_context = pageContext;
    application = pageContext.getServletContext();
    config = pageContext.getServletConfig();
    session = pageContext.getSession();
    out = pageContext.getOut();
    _jspx_out = out;

    out.write("<!-- ComputeLoan.jsp -->\r\n");
    out.write("<html>\r\n");
    out.write("<head>\r\n");
    out.write("<title>ComputeLoan</title>\r\n");
    out.write("</head><body bgcolor=white background=images/background.jpg lang=EN-US
link=blue vlink=blue\r\n");
    out.write("style='tab-interval:.5in'\r\n");
    double loanAmount = Double.parseDouble( request.getParameter("loanAmount"));
    double annualInterestRate = Double.parseDouble(request.getParameter("annualInterestRate"));
    double numberOfYears = Integer.parseInt(request.getParameter("numberOfYears"));
    double monthlyInterestRate = annualInterestRate / 1200;
}

```

Begin original HTML output
from the JSP.



```

        double monthlyPayment = loanAmount * monthlyInterestRate / (1 - 1 / Math.pow(1 +
monthlyInterestRate, numberOfYears * 12));
        double totalPayment = monthlyPayment * numberOfYears * 12;
        out.write("\r\n");    out.write("\r\n");
        out.write("<b><font size = 7> Loan Details </font><br><br>\r\n");
        out.write("<font size = 5>\r\n");
        out.write("Loan Amount: \r\n");    out.print( loanAmount );
        out.write("\r\n");    out.write("<br><br>\r\n");
        out.write("Annual Interest Rate: \r\n");    out.print( annualInterestRate );
        out.write("\r\n");    out.write("<br><br>\r\n");
        out.write("Number of Years: \r\n");    out.print( numberOfYears );
        out.write("\r\n");    out.write("<br><br>\r\n");    out.write("<b>\r\n");
        out.write("Monthly Payment:\r\n");    out.print( monthlyPayment );
        out.write("\r\n");    out.write("<br><br>\r\n");
        out.write("Total Payment:\r\n");    out.print( totalPayment );
        out.write("\r\n");    out.write("<br><br>\r\n");    out.write("</b>\r\n");    out.write("</body>\r\n");
        out.write("</html>");
    } catch (Throwable t) {
        if (!(t instanceof SkipPageException)){
            out = _jspx_out;
            if (out != null && out.getBufferSize() != 0)
                out.clearBuffer();
            if (_jspx_page_context != null) _jspx_page_context.handlePageException(t);
        }
    } finally {
        if (_jspxFactory != null) _jspxFactory.releasePageContext(_jspx_page_context);
    } } } }
```



The Converted JSP - Servlet Version

```
package org.apache.jsp.jsp;
```

ComputeLoan2

```
import javax.servlet.*;  
import javax.servlet.http.*;  
import javax.servlet.jsp.*;  
import code.Loan;
```

Import the Loan class in package code

```
public final class ComputeLoan2_jsp extends org.apache.jasper.runtime.HttpJspBase  
    implements org.apache.jasper.runtime.JspSourceDependent {
```

```
private static java.util.Vector _jspx_dependants;
```

```
public java.util.List getDependants() {  
    return _jspx_dependants;  
}
```

```
public void _jspService(HttpServletRequest request, HttpServletResponse response)  
    throws java.io.IOException, ServletException {
```

```
JspFactory _jspxFactory = null;  
PageContext pageContext = null;  
HttpSession session = null;  
ServletContext application = null;  
ServletConfig config = null;  
JspWriter out = null;
```



```

Object page = this;
JspWriter _jspx_out = null;
PageContext _jspx_page_context = null;

try {
    _jspxFactory = JspFactory.getDefaultFactory();
    response.setContentType("text/html");
    pageContext = _jspxFactory.getPageContext(this, request, response, null, true, 8192, true);
    _jspx_page_context = pageContext;
    application = pageContext.getServletContext();
    config = pageContext.getServletConfig();
    session = pageContext.getSession();
    out = pageContext.getOut();
    _jspx_out = out;

    out.write("<!-- ComputeLoan2.jsp -->\r\n");
    out.write("<html>\r\n");
    out.write("<head>\r\n");
    out.write("<title>ComputeLoan</title>\r\n");
    out.write("</head><body bgcolor=white background=images/background.jpg lang=EN-US
link=blue vlink=blue\r\n");
    out.write("style='tab-interval:.5in'\r\n");
    out.write("\r\n");
    out.write("\r\n");

    double loanAmount = Double.parseDouble( request.getParameter("loanAmount"));
    double annualInterestRate = Double.parseDouble(request.getParameter("annualInterestRate"));
    int numberOfYears = Integer.parseInt(request.getParameter("numberOfYears"));
}

```

Begin the HTML content from the original ComputeLoad.jsp file now constructed from within the servlet (i.e., Java).



```

Loan loan = new Loan (annualInterestRate, numberOfYears, loanAmount);

out.write("\r\n");    out.write("\r\n");
out.write("<b><font size = 7> Loan Details </font><br><br>\r\n");
out.write("<font size = 5>\r\n");    out.write("Loan Amount: \r\n");
out.print( loanAmount );
out.write("\r\n");    out.write("<br><br>\r\n");
out.write("Annual Interest Rate: \r\n");    out.print( annualInterestRate );
out.write("\r\n");    out.write("<br><br>\r\n");
out.write("Number of Years: \r\n");    out.print( numberOfYears );
out.write("\r\n");    out.write("<br><br>\r\n");    out.write("<b>\r\n");
out.write("Monthly Payment:\r\n");    out.print( loan.monthlyPayment() );
out.write("\r\n");    out.write("<br><br>\r\n");
out.write("Total Payment:\r\n");    out.print( loan.totalPayment() );
out.write("\r\n");    out.write("<br><br>\r\n");    out.write("</b>\r\n");    out.write("</body>\r\n");
out.write("</html>");
} catch (Throwable t) {
if (!(t instanceof SkipPageException)){
    out = _jspx_out;
    if (out != null && out.getBufferSize() != 0)
        out.clearBuffer();
    if (_jspx_page_context != null) _jspx_page_context.handlePageException(t);
}
} finally {
    if (_jspxFactory != null) _jspxFactory.releasePageContext(_jspx_page_context);
}
}

```



<jsp: setProperty> Action

- Action <jsp: setProperty> sets JavaBean property values and is most useful for mapping request parameter values to JavaBean properties.
- Request parameters can be used to set properties of primitive types boolean, byte, char, short, int, long, float and double as well as java.lang types String, Boolean, Byte, Character, Short, Integer, Long, Float, and Double.
- The table on the following page summarizes the attributes of this action.



<jsp: setProperty> Action

Attribute	Description
name	The ID of the JavaBean for which a property (or properties) will be set.
property	The name of the property to set. Specifying "*" for this attribute specifies that the JSP should match the request parameters to the properties of the bean. For each request parameter that matches (i.e., the name of the request parameter is identical to the bean's property name), the corresponding property in the bean is set to the value of the parameter. If the value of the request parameter is "", the property value in the bean remains unchanged.
param	If the request parameter names do not match bean property names, this attribute can be used to specify which request parameter should be used to obtain the value for a specific bean property. This attribute is optional. If this attribute is omitted, the request parameter names must match the bean property names.
value	The value to assign to a bean property. The value typically is the result of a JSP expression. This attribute is particularly useful for setting bean properties that cannot be set using request parameters. This attribute is optional. If this attribute is omitted, the JavaBean property must be of a type that can be set using request parameters.



JSP Directives

- Directives are messages to the JSP container that enable the programmer to specify page settings, such as, the error page to invoke if an error occurs (page directive), including content from other resources (include directive), and to specify custom-tag libraries for use in a JSP (taglib directive).
- Directives are delimited by <%@ and %> and are processed at translation time. As such, directives do not produce any immediate output, because they are processed before the JSP accepts any requests.
- For our purposes here, the most important of these is the page directive, which we will make use of in the final example JSP. Some of the attributes of the page directive are shown on the next page.



JSP Page Directive Attributes

Attribute	Description
import	Specifies a comma-separated list of fully qualified type names and/or packages that will be used in the current JSP.
errorPage	Any exceptions in the current page that are not caught are sent to the error page for processing. The error-page implicit object exception references the original exception.
extends	Specifies the class from which the translated JSP can inherit. This attribute must be a fully qualified class name.



<jsp: useBean> Action

- Action <jsp: useBean> enables a JSP to manipulate a Java object. This action creates a Java object or locates an existing object for use in the JSP.
- The table on the following page summarizes the attributes of this action.
- If attributes class and beanName are not specified, the JSP container attempts to locate an existing object of the type specified in attribute type.
- Like JSP implicit objects, objects specified with this action have scope – page, request, session, or application – which indicates where they can be used in a web application. (Recall that objects with page scope are only accessible by the page in which they are defined. For example, all JSPs that process a single request can access an object in request scope.)



<jsp: useBean> Action

Attribute	Description
id	The name used to manipulate the Java object with actions <jsp:setProperty> and <jsp:getProperty>. A variable of this name is also declared for use in JSP scripting elements. Case sensitive.
scope	The scope in which the Java object is accessible – page, request, session, or application. The default scope is page.
class	The fully qualified class name of the Java object.
beanName	The name of the JavaBean that can be used with method <code>instantiate</code> of class <code>java.beans.Beans</code> to load a JavaBean into memory.
type	The type of the JavaBean. This can be the same type as the class attribute, a superclass of that type, or an interface implemented by that type. The default value is the same as for attribute class. A <code>ClassCastException</code> occurs if the Java object is not of the type specified with attribute type.



A JSP Using <jsp: useBean> Action

- A common feature on many web sites is to place rotating advertisements on their webpages. Each visit to one of these pages results in a different advertisement being displayed in the user's web browser. Typically, when you click on the advertisement (or picture of a product) you are redirected to the website of the company that placed the advertisement or to the page that more completely describes the product.
- The next example illustrates a similar scenario, by rotating through a series of pictures (click the refresh button of your browser to simulate multiple logins or login from different browsers). In this example, I set it up to rotate through some pictures of some of my toys. If you click on a picture...you'll be redirected to the manufacturer's web page.



A JSP Using the <jsp: useBean> Action

```
// Rotator.java
// A JavaBean that rotates pictures.
package com.cnt4174.jsp.beans;

public class Rotator
{
    private String images[] = { "images/image1.jpg",
        "images/image2.jpg", "images/image3.jpg",
        "images/image4.jpg", "images/image5.jpg" };

    private String links[] = {
        "http://www.eddymerckx.be",
        "http://www.competitivedcyclist.com",
        "http://www.bianchi-usa.com",
        "http://www.colnago.it",
        "http://www.cometkartsales.com" };

    private int selectedIndex = 0;

    // returns image file name for current ad
    public String getImage()
    {
        return images[ selectedIndex ];
    } // end method getImage
```

```
//continue here -- returns the URL for corresponding Web
site
    public String getLink() {
        return links[ selectedIndex ];
    } // end method getLink

    // update selectedIndex so next calls to getImage and
    // getLink return a different picture
    public void nextPic()
    {
        selectedIndex = ( selectedIndex + 1 ) % images.length;
    } // end method nextPic
} // end class Rotator
```




```
<?xml version = "1.0"?>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN"
 "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">
<!-- picturerotator.jsp -->
<jsp:useBean id = "rotator" scope = "session"
 class = "com.cnt4714.jsp.beans.Rotator" />
<html xmlns = "http://www.w3.org/1999/xhtml">
  <head>
    <title>PictureRotator Example</title>
    <style type = "text/css">
      .big { font-family: helvetica, arial, sans-serif; font-weight: bold; font-size: 2em }
    </style>
    <%-- update picture --%>
    <% rotator.nextPic(); %>
  </head>
  <body>
    <p class = "big">PictureRotator Example</p>
    <p>
      <a href = "<jsp:getProperty name = "rotator"
         property = "link" />">
        <img src = "<jsp:getProperty name = "rotator"
              property = "image" />" alt = "picture" />
      </a>
    </p>
  </body>
</html>
```

picturerotator.jsp


<jsp: useBean> action specifying id, scope, and class




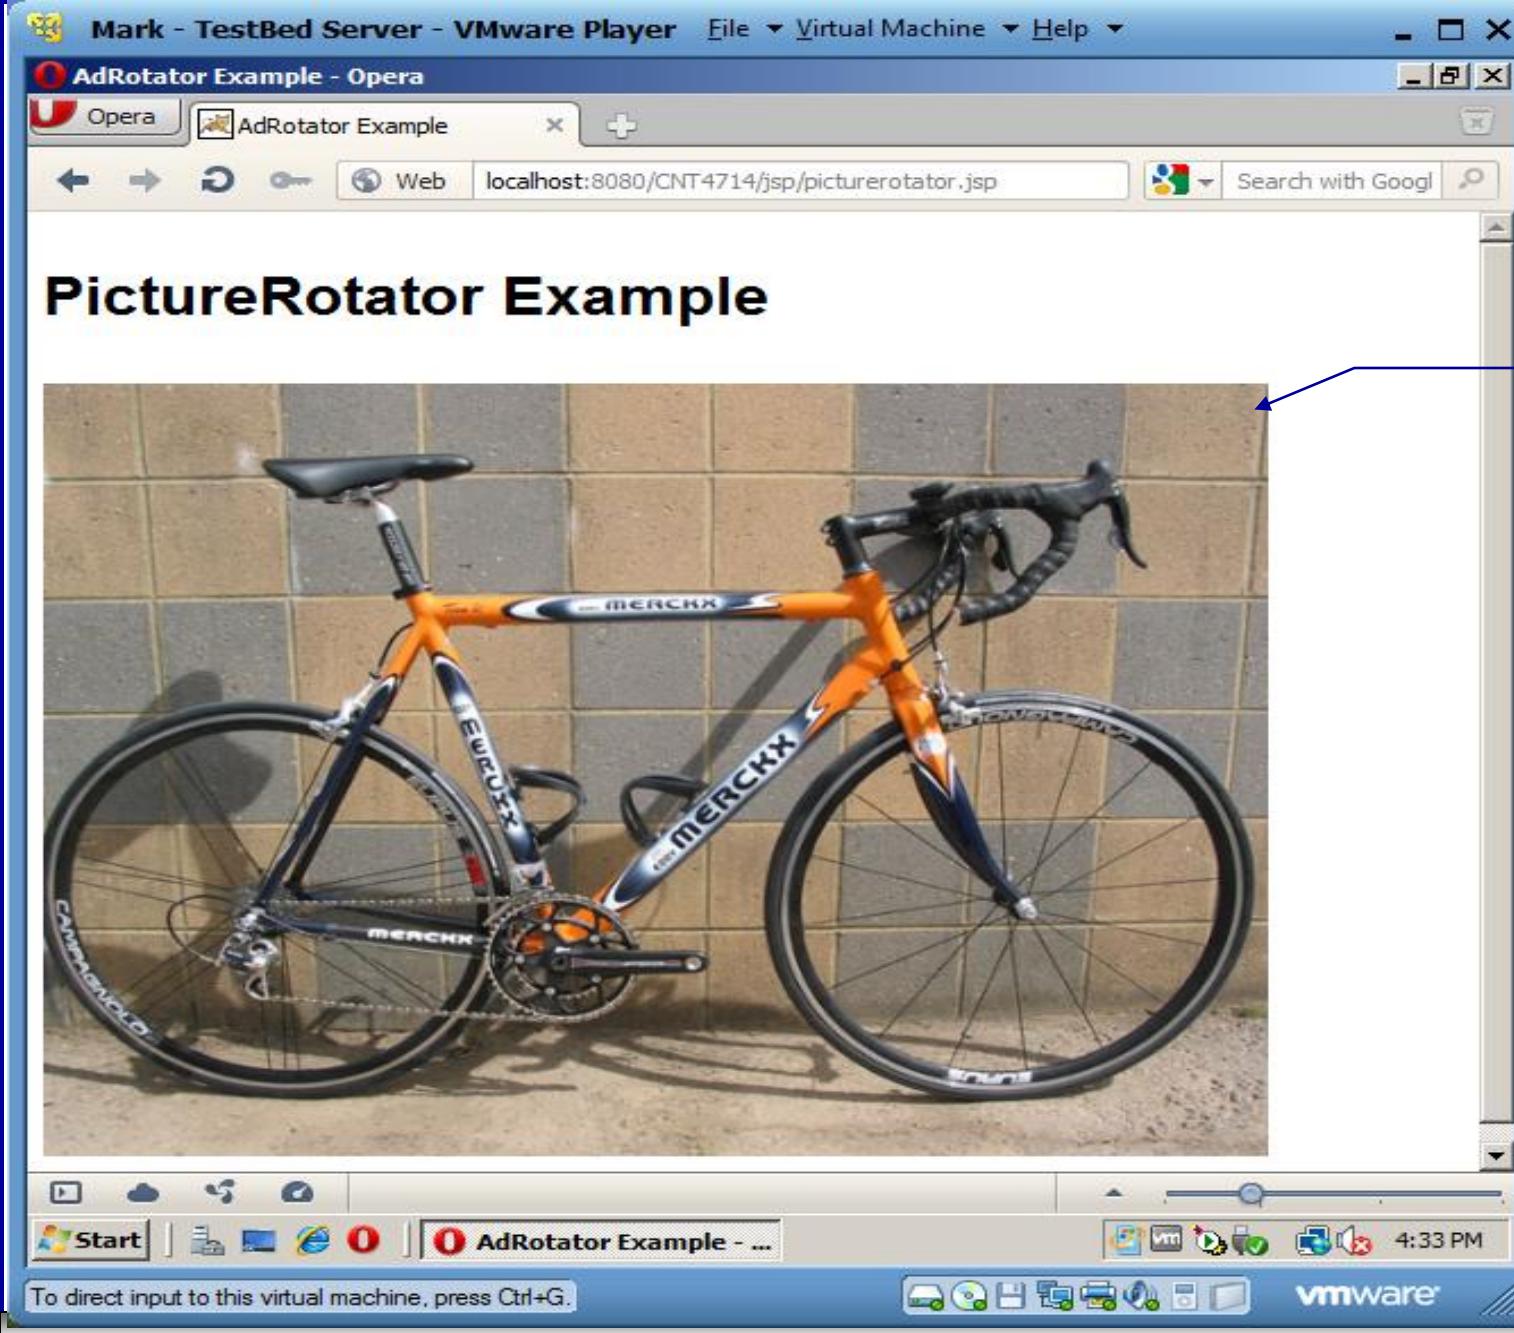


First image seen in
the rotation of five
images.



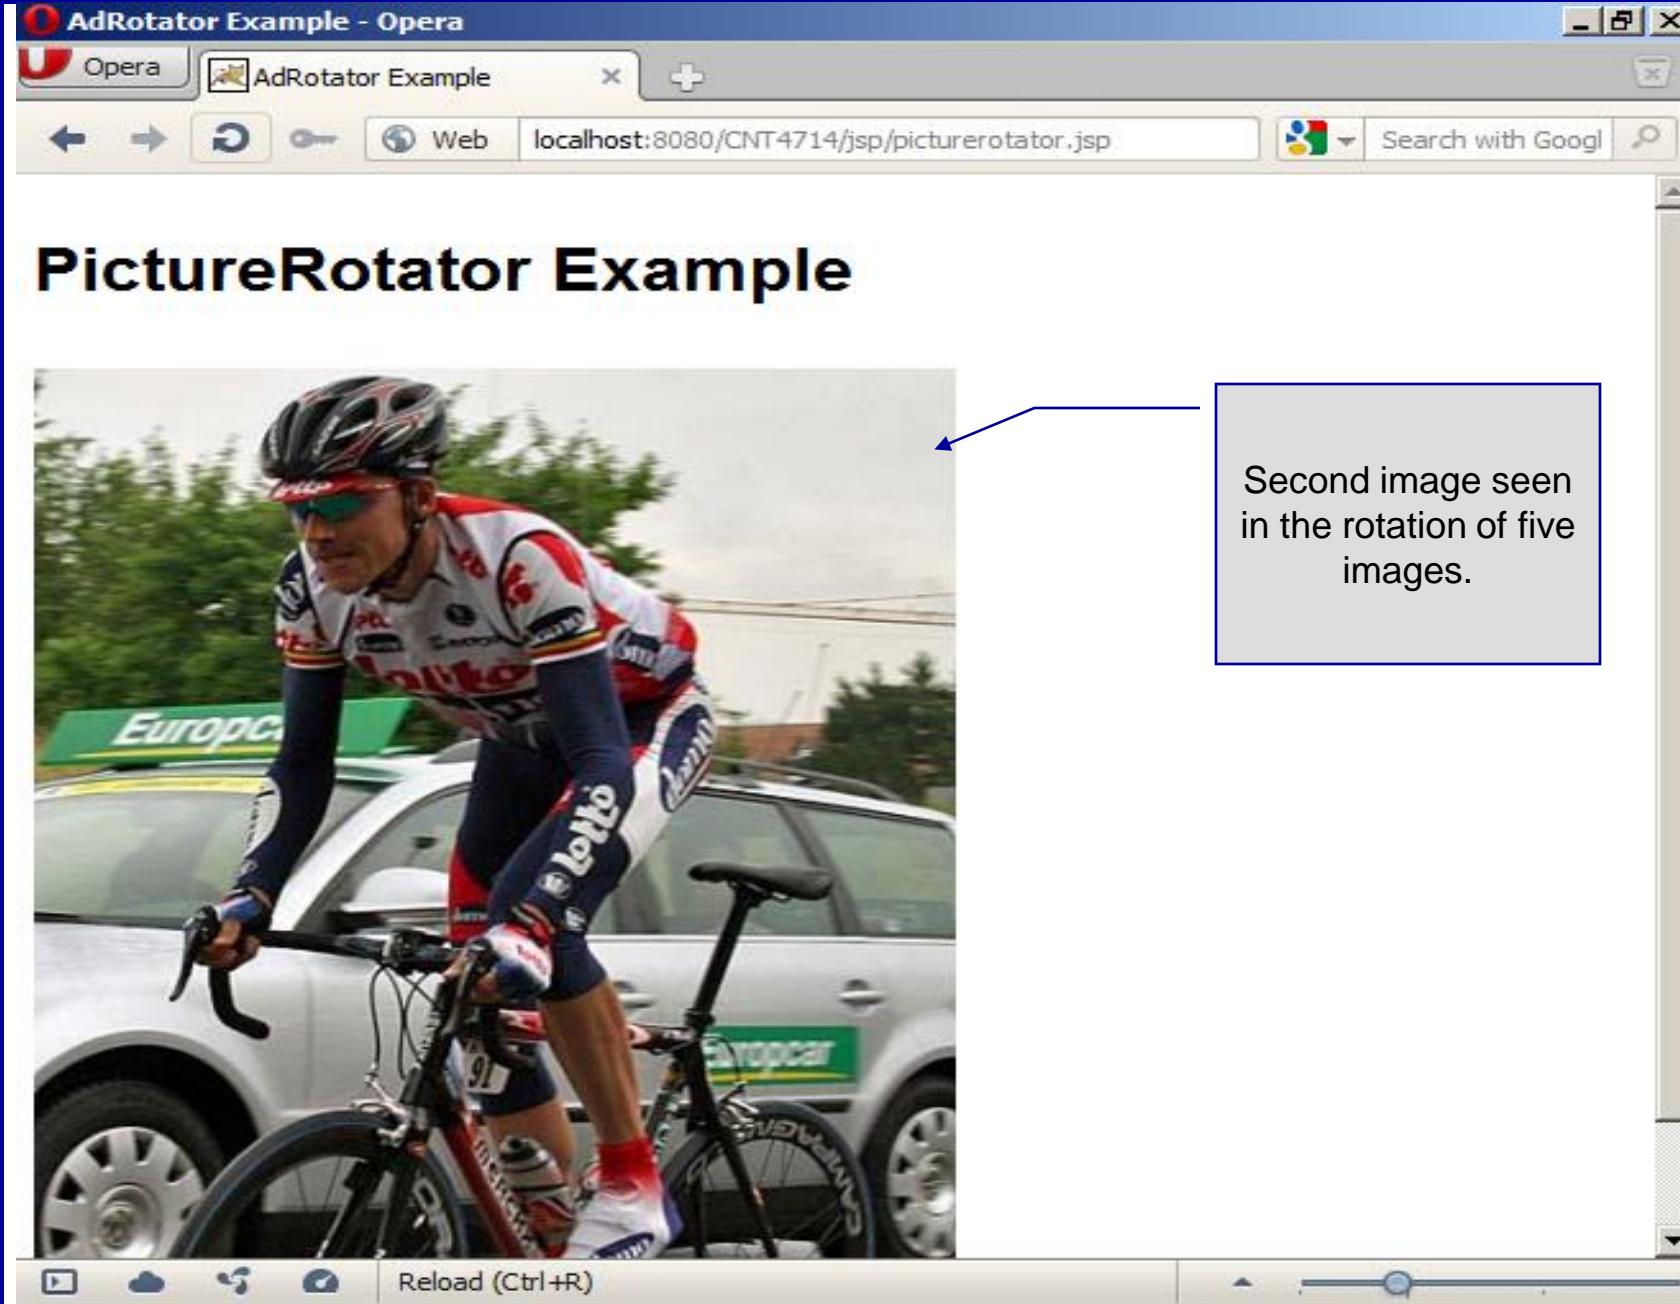

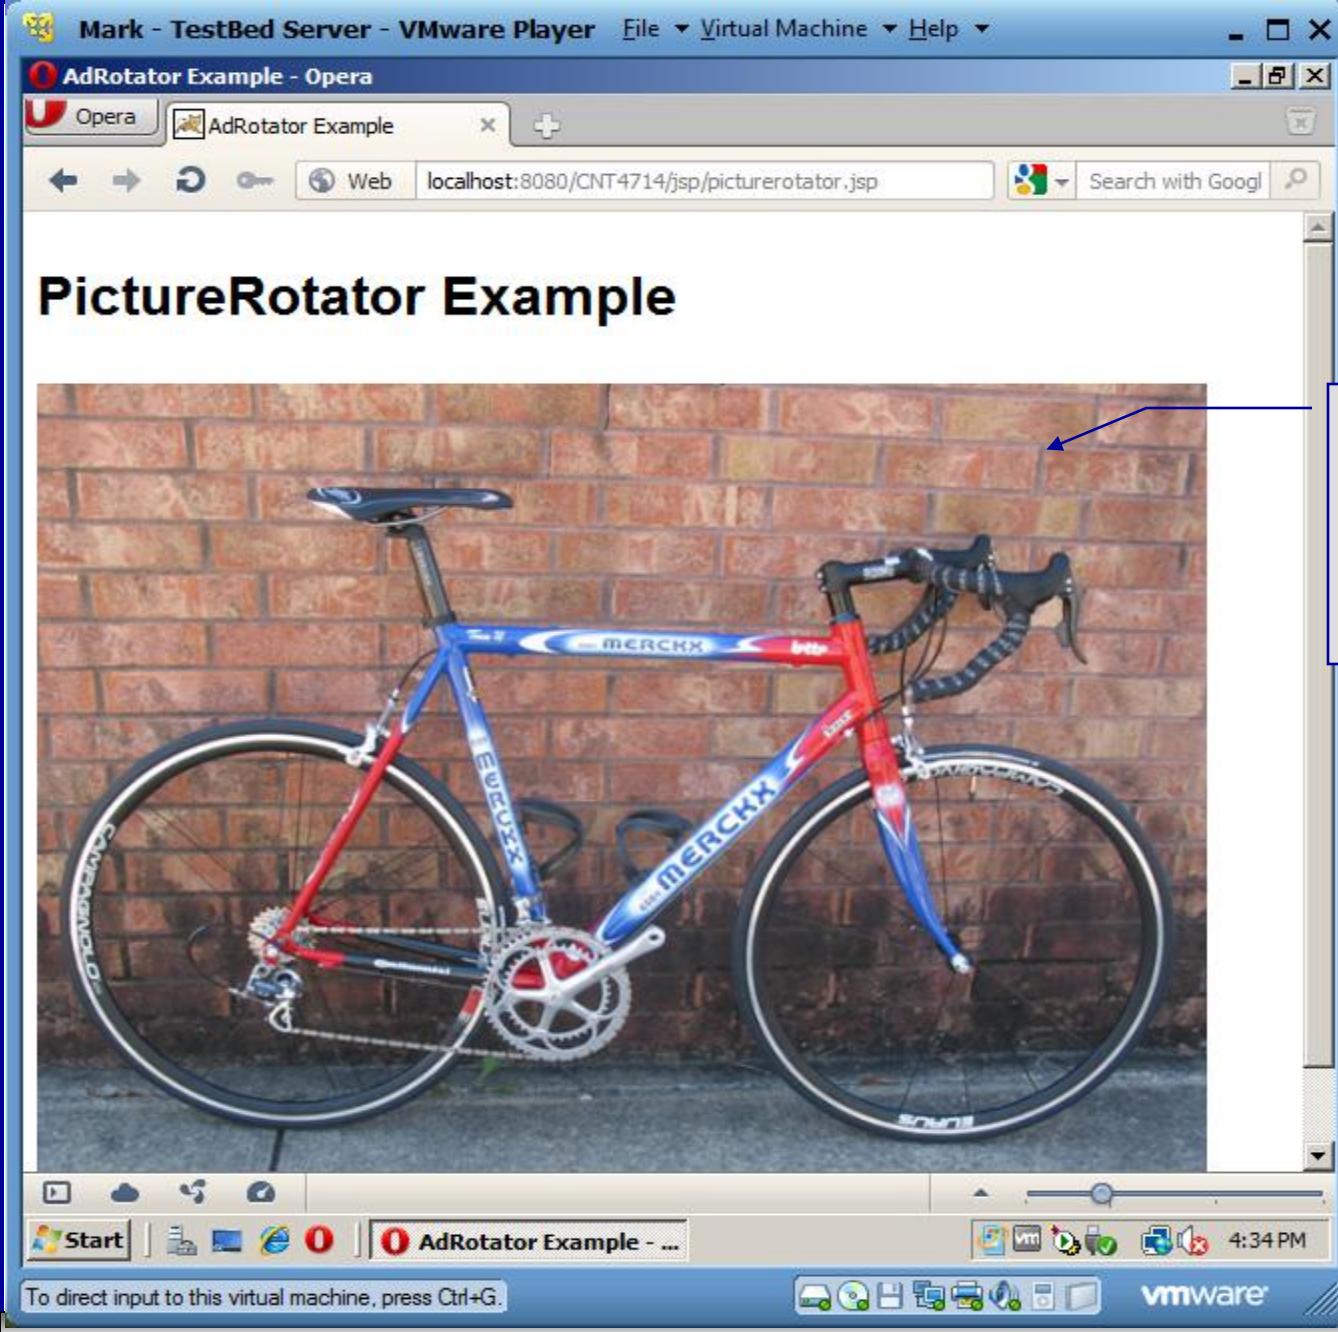

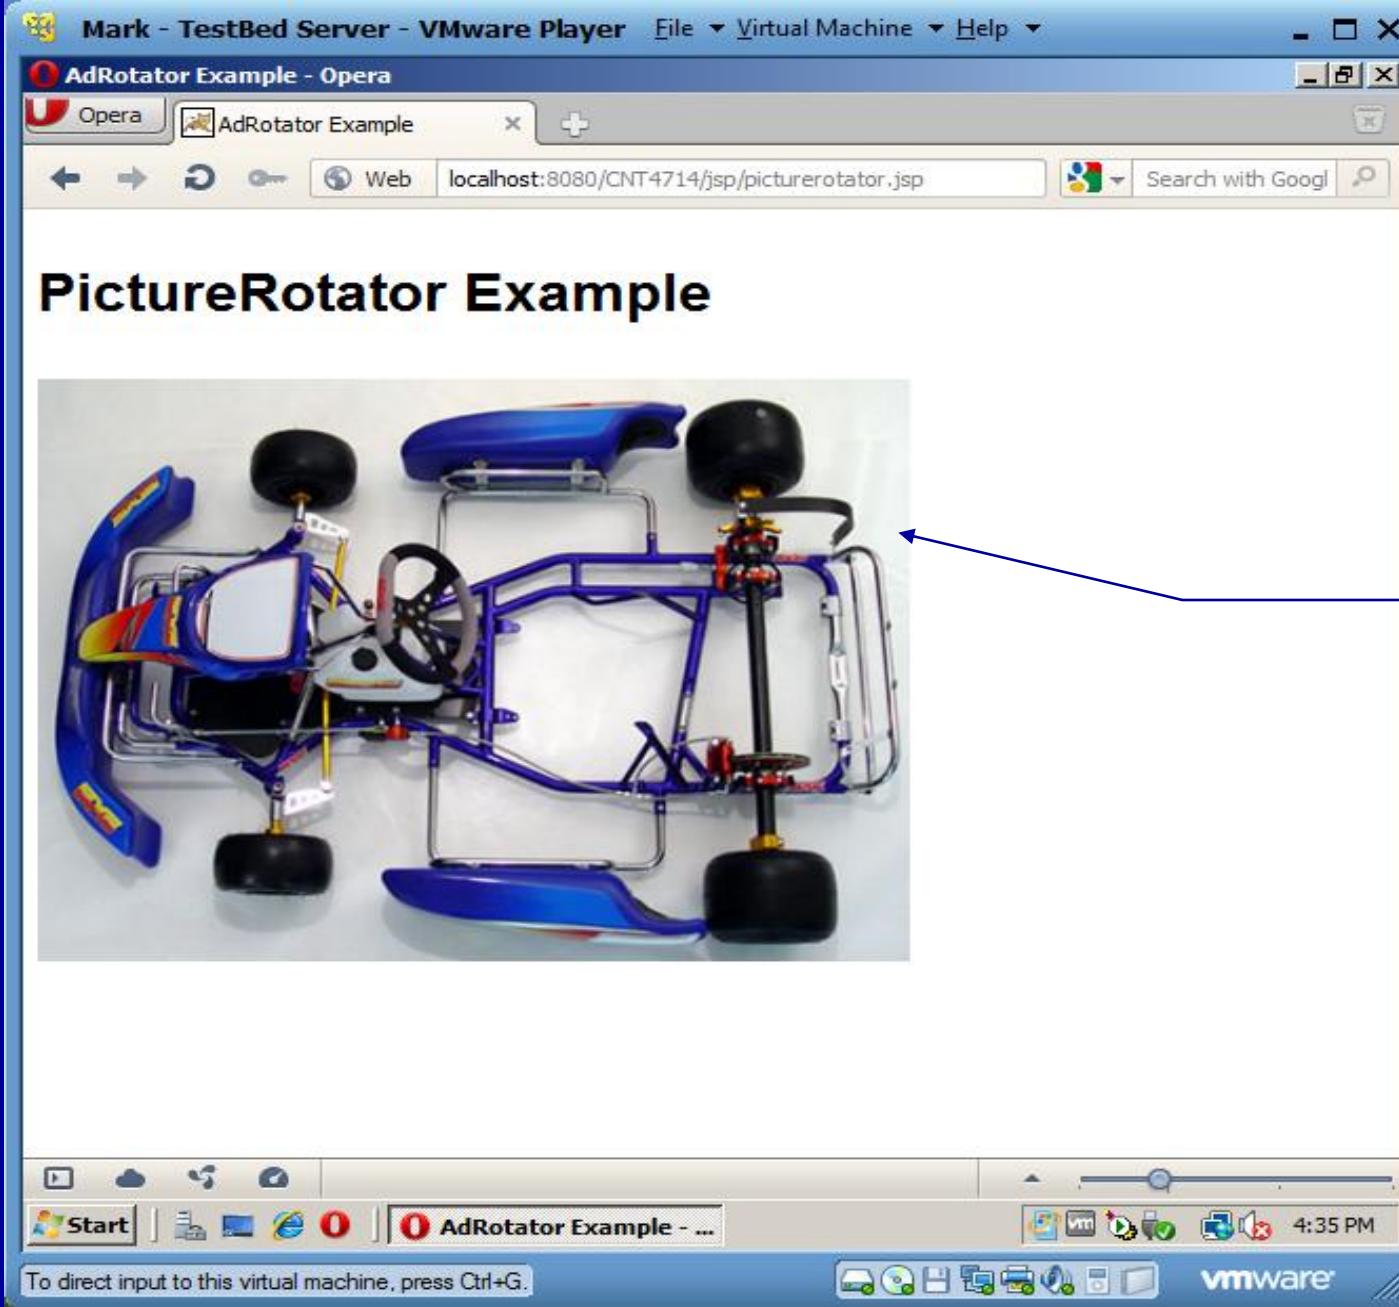

Comet Kart Sales - The Largest Kart Shop on the Net - Racing Karts, Go Kart, Go Karts, Go Karting, Go Kart, GoKart, Kart, Ka... [Close]

Opera Comet Kart Sales - The L... [Close]

Web www.cometkartsales.com Search with Google

Redirected to web site by clicking on the image

[ABOUT US](#) [FAQS](#) [NEWS](#) [CATALOG REQUEST](#) [EMAIL +/-](#) [LINKS](#) [DEALERS | CONTACT](#) [GO](#) [STORE](#) [PHOTO GALLERY](#)

COMET
Kart sales

THE LARGEST KART SHOP ON THE NET

Welcome to the World's Largest Online Karting Catalog!

We have thousands of karting's most popular products in stock! You order it, we ship it! Comet can supply you with everything from nuts and bolts to turnkey race winning capable karts and engines!

COMET NEWS

- [Arrow Racing Karts](#)
[Click here for details...](#)
- [CRG Racing Karts](#)
[Click here for details...](#)
- [Kosmic Racing Karts](#)
[Click here for details...](#)
- [Margay Racing Karts](#)
[Click here for details...](#)
- [Tony Racing Karts](#)
[Click here for details...](#)
- [Comet Racing Engines](#)
We Build Horsepower! [Click here for details...](#)
- [Patriot Two Cycle Engine Clutch](#)



To direct input to this virtual machine, press **Ctrl+G**.



More Details On Using Beans

- The Rotator bean has three elements: getImage, getLink, and nextPic.
 - Method getImage returns the image file name for the picture to be displayed.
 - Method getLink returns the hyperlink to the manufacturer/supplier of the “toy”.
 - Method nextPic updates the Rotator so that the next calls to getImage and getLink will return information for a different picture.
- Methods getImage and getLink each represent a read-only JavaBean property – image and link, respectively. These are read-only properties because no *set* methods are provided to change their values.
- Rotator keeps track of the current picture with its selectedIndex variable, which is updated by invoking method nextPic.



More Details On Using Beans (cont.)

- JavaBeans were originally intended to be manipulated visually in **visual development environments** (often called **builder tools** or **IDEs**).
- Builder tools that support beans provide programmers with tremendous flexibility by allowing for the reuse and integration of existing disparate components that, in many cases, were never intended to be used together.
- When used in an IDE, JavaBeans adhere to the following coding conventions:
 1. Implements the Serializable interface.
 2. Provides a public no-argument (default) constructor.
 3. Provides get and/or set methods for properties (which are normally implemented as fields.)



More Details On Using Beans (cont.)

- When used on the server side, such as within a JSP or a servlet, JavaBeans are less restricted.
 - Notice for example, that the Rotator bean does not implement the Serializable interface because there is no need to save and load the Rotator bean as a file.
- The JSP `picturerotator.jsp` (see page 6) obtains a reference to an instance of class `Rotator`. The `id` for the bean is `rotator`. The JSP uses this name to manipulate the bean. The scope of the object is `session`, so that every client will see the same sequence of pictures during their browsing sessions.



More Details On Using Beans (cont.)

- When `picturerotator.jsp` receives a request from a new client, the JSP container creates the bean and stores it in that client's session (an `HttpSession` object).
- In each request to this JSP, the `rotator` reference which is created is used to invoke the `Rotator` bean's `nextPic` method. Therefore, each request will receive the next picture selected by the `Rotator` bean.
- Notice the two `<jsp: getProperty>` actions in the `picturerotator.jsp` file. One of these obtains the `link` property value from the bean, the other obtains the `image` property value.
 - Action `<jsp: getProperty>` has two attributes: `name` and `property`, which specify the bean object to manipulate and the property to get.



More Details On Using Beans (cont.)

- Action <jsp: getProperty> has two attributes: name and property, which specify the bean object to manipulate and the property to get.
 - If the JavaBean object uses standard JavaBean naming conventions, the method used to obtain the link property value from the bean should be getLink.
 - Action <jsp: getProperty> invokes getLink on the bean referenced with rotator, converts the return value into a String and outputs the String as a part of the response to the client.



More Details On Using Beans (cont.)

- The link and image properties can also be obtained with JSP expressions.
 - The action <jsp: getProperty> (see page 6 for location, the line looks like: <a href = "<jsp:getProperty name = "rotator" property = "link" />">) could be replaced with the expression: <%= rotator.getLink() %>
 - Similarly, the action <jsp: getProperty> (see page 6 for location, the line looks like: <img src = "<jsp:getProperty name = "rotator" property = "image" />" alt = "picture" />) could be replaced with the expression:
<%= rotator.getImage() %>
- However, the benefit of using actions is that someone who is unfamiliar with Java can be told the name of a property and the name of a bean, and it is the action's responsibility to invoke the appropriate methods. The Java programmer's job is to create a bean that supports the capabilities required by the page designer.



Final JSP Example - GuestBook

- Our final JSP example will illustrate many of the techniques that we've covered in dealing with JDBC, servlets, and JSPs.
- This example constructs a simple MySQL database to maintain a guest book that includes a guest's first name, last name, and email address.
 - Once a guest enters their name into the guestbook, they will see a webpage containing all the guests in the guest book. Each email address is displayed as a hyperlink that makes it possible for guests to send email to another guest.
- This example illustrates the `<jsp: setProperty>` action, the JSP page directive, JSP error pages, and using JDBC from a JSP.



GuestBean.java

```
// GuestBean.java
// JavaBean to store data for a guest in the guest book.
package com.cnt4714.jsp.beans;

public class GuestBean
{
    private String firstName;
    private String lastName;
    private String email;

    // set the guest's first name
    public void setFirstName( String name )
    {
        firstName = name;
    } // end method setFirstName

    // get the guest's first name
    public String getFirstName()
    {
        return firstName;
    } // end method getFirstName
```

This JavaBean maintains information for one guest.



GuestBean.java (cont.)

```
// set the guest's last name
public void setLastName( String name )
{
    lastName = name;
} // end method setLastName

// get the guest's last name
public String getLastName()
{
    return lastName;
} // end method getLastName

// set the guest's email address
public void setEmail( String address )
{
    email = address;
} // end method setEmail

// get the guest's email address
public String getEmail()
{
    return email;
} // end method getEmail
} // end class GuestBean
```



GuestDataBean.java

```
// GuestDataBean.java  
// Class GuestDataBean makes a database connection and supports  
// inserting and retrieving data from the database.  
package com.cnt4714.jsp.beans;
```

```
import java.sql.SQLException;  
import javax.sql.rowset.CachedRowSet;  
import java.util.ArrayList;  
import com.sun.rowset.CachedRowSetImpl; // CachedRowSet implementation
```

```
public class GuestDataBean  
{  
    private CachedRowSet rowSet;  
  
    // construct TitlesBean object  
    public GuestDataBean() throws Exception  
    {  
        // load the MySQL driver  
        Class.forName( "com.mysql.jdbc.Driver" );  
  
        // specify properties of CachedRowSet  
        rowSet = new CachedRowSetImpl();  
        rowSet.setUrl( "jdbc:mysql://localhost:3309/guestbook" );  
        rowSet.setUsername( "root" );  
        rowSet.setPassword( "root" );
```

This JavaBean performs the database access on behalf of the guestBookLogin.jsp

This application uses the CachedRowSet data model rather than the TableSet from our earlier JDBC application example.

Load JDBC driver and connect to database

Note this will cause compilation errors in Eclipse. Change the default settings in Eclipse : Windows -> Preferences -> Java -> Compiler -> Errors/Warnings -> Deprecated and restricted API -> Forbidden reference (access rules): -> change from error to warning.



GuestDataBean.java (cont.)

```
// obtain list of titles
rowSet.setCommand(
    "SELECT firstName, lastName, email FROM guests" );
rowSet.execute();
} // end GuestDataBean constructor

// return an ArrayList of GuestBeans
public ArrayList< GuestBean > getGuestList() throws SQLException
{
    ArrayList< GuestBean > guestList = new ArrayList< GuestBean >();

    rowSet.beforeFirst(); // move cursor before the first row

    // get row data
    while ( rowSet.next() )
    {
        GuestBean guest = new GuestBean();

        guest.setFirstName( rowSet.getString( 1 ) );
        guest.setLastName( rowSet.getString( 2 ) );
        guest.setEmail( rowSet.getString( 3 ) );

        guestList.add( guest );
    } // end while
}
```



GuestDataBean.java

```
return guestList;
} // end method getGuestList

// insert a guest in guestbook database
public void addGuest( GuestBean guest ) throws SQLException
{
    rowSet.moveToInsertRow(); // move cursor to the insert row

    // update the three columns of the insert row
    rowSet.updateString( 1, guest.getFirstName() );
    rowSet.updateString( 2, guest.getLastName() );
    rowSet.updateString( 3, guest.getEmail() );
    rowSet.insertRow(); // insert row to rowSet
    rowSet.moveToCurrentRow(); // move cursor to the current row
    //rowSet.acceptChanges(); // force propagation of changes to database
} // end method addGuest
} // end class GuestDataBean
```

Note that the acceptChanges() method forces MySQL to perform a commit operation to make the changes permanent in the database. If your MySQL installation had autocommit set on (forcing automatic commits), you'll want to comment out this line, or in the reverse, if your MySQL has autocommit set off, you'll need to include this line of code.



GuestBookLogin.jsp

```
<?xml version = "1.0"?>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN"
 "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">

<!-- guestBookLogin.jsp -->

<%-- page settings --%>
<%@ page errorPage = "guestBookLoginPage.jsp" %>

<%-- beans used in this JSP --%>
<jsp:useBean id = "guest" scope = "page"
   class = "com.cnt4714.jsp.beans.GuestBean" />
<jsp:useBean id = "guestData" scope = "request"
   class = "com.cnt4714.jsp.beans.GuestDataBean" />

<html xmlns = "http://www.w3.org/1999/xhtml">
<head>
  <title>Guest Book Login</title>
  <style type = "text/css">
    body
    {
      font-family: tahoma, helvetica, arial, sans-serif;
    }
  </style>
</head>
<body>
```

GuestBookLogin.jsp is a modified version of our welcome1.jsp and welcome1 servlet that we've already seen. It displays a form that the guest uses to enter their information. When the form is submitted, GuestBookLogin.jsp is requested again so that it can ensure that all of the data is entered. If not, the form is regenerated until the guest enters all information. If all information is entered, then this JSP forwards the request to guestBookView.jsp to display the contents of the guest book.

All uncaught exceptions are forwarded to guestBookLoginPage.jsp for processing.



GuestBookLogin.jsp (cont.)

```
table, tr, td {  
    font-size: 1.4em;  
    border: 3px groove;  
    padding: 5px;  
    background-color: #dddddd;  
}  
</style>  
</head>  
<body>  
    <jsp:setProperty name = "guest" property = "*" />  
    <% // start scriptlet  
        if ( guest.getFirstName() == null ||  
            guest.getLastName() == null ||  
            guest.getEmail() == null )  
        {  
    %> <%-- end scriptlet to insert fixed template data --%>  
        <form method = "post" action = "guestBookLogin.jsp">  
            <p>Enter your first name, last name and email  
                address to register in our guest book.</p>  
            <table>  
                <tr>  
                    <td>First name</td>  
                    <td>  
                        <input type = "text" name = "firstName" />  
                    </td>  
                </tr>
```

<jsp: setProperty> action



GuestBookLogin.jsp (cont.)

```
<tr>
<td>Last name</td>
<td> <input type = "text" name = "lastName" /> </td>
</tr>
<tr>
<td>Email</td>
<td> <input type = "text" name = "email" /> </td>
</tr>
<tr>
<td colspan = "2"> <input type = "submit" value = "Submit" /> </td>
</tr>
</table>
</form>
<% // continue scriptlet
} // end if
else
{
    guestData.addGuest( guest );
%> <%-- end scriptlet to insert jsp:forward action --%>
    <%-- forward to display guest book contents --%>
    <jsp:forward page = "guestBookView.jsp" />
<% // continue scriptlet
} // end else
%> <%-- end scriptlet --%>
</body>
</html>
```

Once the guest has entered their information into the database, the guestBookView is generated via the `<jsp: forward>` action which invokes the guestBookView JSP.



GuestBookView.jsp

```
<?xml version = "1.0"?>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN"
 "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">

<!-- guestBookView.jsp -->

<%-- page settings --%>
<%@ page errorPage = "guestBookErrorPage.jsp" %> ←
<%@ page import = "java.util.*" %>
<%@ page import = "com.cnt4714.jsp.beans.*" %>

<%-- GuestDataBean to obtain guest list --%>
<jsp:useBean id = "guestData" scope = "request"
 class = "com.cnt4714.jsp.beans.GuestDataBean" />

<html xmlns = "http://www.w3.org/1999/xhtml">
 <head>
   <title>Guest List</title>
   <style type = "text/css">
     body
       {
         font-family: tahoma, helvetica, arial, sans-serif;
       }
 
```

These three page directives specify that the error page for this JSP is guestBookErrorPage.jsp, that classes from package java.util are used in this JSP, and classes from the package com.cnt4714.jsp.beans are also used.



GuestBookView.jsp (cont.)

```
table, tr, td, th
{
    text-align: center;
    font-size: 1.4em;
    border: 3px groove;
    padding: 5px;
    background-color: #dddddd;
}
</style>
</head>
<body>
    <p style = "font-size: 2em;">Guest List</p>
    <table>
        <thead>
            <tr>
                <th style = "width: 100px;">Last name</th>
                <th style = "width: 100px;">First name</th>
                <th style = "width: 200px;">Email</th>
            </tr>
        </thead>
        <tbody>
            <% // start scriptlet
List guestList = guestData.getGuestList();
Iterator guestListIterator = guestList.iterator();
GuestBean guest;
```



GuestBookView.jsp (cont.)

```
while ( guestListIterator.hasNext() )
{
    guest = ( GuestBean ) guestListIterator.next();
%> <%-- end scriptlet; insert fixed template data --%>
<tr>
    <td><%= guest.getLastName() %></td>
    <td><%= guest.getFirstName() %></td>
    <td>
        <a href = "mailto:<%= guest.getEmail() %>">
            <%= guest.getEmail() %></a>
        </td>
    </tr>
<% // continue scriptlet
    } // end while
%> <%-- end scriptlet --%>
</tbody>
</table>
</body>
</html>
```



guestBookErrorPage.jsp

```
<?xml version = "1.0"?>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN"
 "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd">

<!-- guestBookErrorPage.jsp -->

<%-- page settings --%>
<%@ page isErrorPage = "true" %>
<%@ page import = "java.util.*" %>
<%@ page import = "java.sql.*" %>

<html xmlns = "http://www.w3.org/1999/xhtml">
    <head>
        <title>Error!</title>
        <style type = "text/css">
            .bigRed { font-size: 2em; color: red; font-weight: bold; }
        </style>
    </head>
    <body>
        <p class = "bigRed">
            <% // scriptlet to determine exception type
                // and output beginning of error message
                if ( exception instanceof SQLException )
                {
            %>
```



guestBookErrorPage.jsp (cont.)

A SQLException

```
<%
} // end if
    else if ( exception instanceof ClassNotFoundException )
{
%>
A ClassNotFoundException
<%
} // end else if
else
{
%>
A general exception
<%
} // end else
%>
<%-- end scriptlet to insert fixed template data --%>
<%-- continue error message output --%>
    occurred while interacting with the guestbook database.
</p>
<p class = "bigRed"> The error message was:<br /> <%= exception.getMessage() %>
</p>
<p class = "bigRed">Please try again later</p>
</body>
</html>
```



Mark - TestBed Server - VMware Player File ▾ Virtual Machine ▾ Help ▾

MySQL Workbench

SQL Editor (Mark-Server1VM... X)

File Edit View Query Database Plugins Scripting Community Help ORACLE

Object Browser

SCHEMAS

- bikedb
- colorsurvey
- guestbook
 - Tables
 - guests
 - Columns
 - Indexes
 - Foreign Keys
 - Triggers
 - Views
 - Routines
 - mailinglist
 - prog3
 - project2
 - project4
 - test

SQL File 1* X

1 • describe guests

To run this example you will need to create the database named guestbook and the table named guests with the schema shown above.

The script named “guestbookscript.sql” is on the course code page for you to use.

Filter: Export: Autosize: □

	Field	Type	Null	Key	Default	Extra
▶	lastName	varchar(20)	YES		NULL	
▶	firstName	varchar(20)	YES		NULL	
▶	email	varchar(50)	NO	PRI		

Result 1 Read Only Snippets

Action Output

	Time	Action	Message	Duration / Fetch
✓	1 11:12:57	describe guests	3 row(s) returned	0.031 sec / 0.000 sec

Information

Start AdRotator Example - Op... CNT 4714 - Spring 2012 ... MySQL Workbench 11:13 AM

To direct input to this virtual machine, press Ctrl+G.

vmware

CNT 4714: JSPs – Part 3

Page 44

Dr. Mark Llewellyn ©

MySQL logo

Mark - TestBed Server - VMware Player File ▾ Virtual Machine ▾ Help ▾

Guest Book Login - Opera
Opera Guest Book Login

Web localhost:8080/CNT4714/jsp/guestBookLogin.jsp Search with Google

Welcome to the CNT 4714 JSP Driven Guest Book

Enter your first name, last name and email address to register in our guest book.

First name	<input type="text" value="Mark"/>
Last name	<input type="text" value="Llewellyn"/>
Email	<input type="text" value="markl@cs.ucf.edu"/>
<input type="button" value="Submit"/>	

Initial screen for client to enter information to be sent to the database.

Start beans MySQL Workbench 11:35 AM

To direct input to this virtual machine, press Ctrl+G.

vmware

CNT 4714: JSPs – Part 3 Page 45 Dr. Mark Llewellyn ©

Mark - TestBed Server - VMware Player File ▾ Virtual Machine ▾ Help ▾

Current Guest List - Opera
Opera Current Guest List × +

Web localhost:8080/CNT4714/jsp/guestBookLogin.jsp ★ Search with Google

Guest List

Last name	First name	Email
Llewellyn	Mark	markl@cs.ucf.edu

User's screen after they click the submit button after entering their information into the form.

Once they click the submit button the guestBookLogin JSP forwards to the GuestBookView JSP to display the contents of the guest book (the database) at that point in time.

To direct input to this virtual machine, press Ctrl+G.

12:46 PM



Mark - TestBed Server - VMware Player File ▾ Virtual Machine ▾ Help ▾

Current Guest List - Opera

Opera Current Guest List × +

Web localhost:8080/CNT4714/jsp/guestBookView.jsp Search with Google

Guest List

Last name	First name	Email
Thurau	Didi	didi@frankfurt.de
Swanepoel	Candice	hot.com
Llewellyn	Mark	markl@cs.ucf.edu
Fox	Megan	notInTransformers3.com
Panettiere	Hayden	saveTheCheerleader.com

After a number of people have entered information into the database.

To direct input to this virtual machine, press Ctrl+G.

Start beans MySQL Workbench vmware 11:39 AM

CNT 4714: JSPs – Part 3 Page 47 Dr. Mark Llewellyn ©

Mark - TestBed Server - VMware Player File ▾ Virtual Machine ▾ Help ▾

MySQL Workbench SQL Editor (Mark-Server1VM... X)

File Edit View Query Database Plugins Scripting Community Help

ORACLE

Object Browser

SCHEMAS

- bikedb
- colorsurvey
- guestbook
 - Tables
 - guests
 - Views
 - Routines
- mailinglist
- prog3
- project2
- project4
- test

SQL File 1* x guestbookscript

1 • select * from guests

Filter: Edit: Export: Autosize:

	lastName	firstName	email
Thurau	Didi	didi@frankfurt.de	
Swanepoel	Candice	hot.com	
Llewellyn	Mark	markl@cs.ucf.edu	
Fox	Megan	notInTransformers3.com	
Panettiere	Hayden	saveTheCheerleader....	
*	NULL	NULL	NULL

guests 2 Apply Cancel Snippets

Action Output

	Time	Action	Message	Duration / Fetch
6	11:36:38	select * from guests LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
7	11:39:30	select * from guests LIMIT 0, 1000	5 row(s) returned	0.000 sec / 0.000 sec

Information

Start Current Guest List - Opera beans MySQL Workbench 11:40 AM

To direct input to this virtual machine, press Ctrl+G.

vmware

CNT 4714: JSPs – Part 3

Page 48

Dr. Mark Llewellyn ©

MySQL logo

Causing An Error From GuestBookLogin JSP

The screenshot shows a web browser window titled "Guest Book Login - Opera". The address bar displays the URL <http://localhost:8080/CNT4714/jsp/guestBookLogin.jsp>. The main content is a guest book login form with the following fields:

First name	<input type="text" value="Eva"/>
Last name	<input type="text" value="Mendes"/>
Email	<input type="text" value="markl@cs.ucf.edu"/>
<input type="button" value="Submit"/>	

A blue arrow points from the text input field containing "markl@cs.ucf.edu" to a callout box on the right. The callout box contains the following text:

Email address is the primary key and this one will be a duplicate value when the user clicks the submit button. Next page illustrates the results.



Causing An Error From GuestBookLogin JSP (cont.)

The screenshot shows an Opera browser window with three tabs: 'manager', 'Downloads', and 'Error!'. The 'Error!' tab is active, displaying the URL <http://localhost:8080/CNT4714/jsp/guestBookLogin.jsp>. The main content area of the browser displays the following error message:

A SQLException occurred while interacting with the guestbook database.

**The error message was:
6conflicts while synchronizing**

Please try again later

An arrow points from the text '6conflicts while synchronizing' to a callout box containing the following explanatory text:

Error page was generated due to the duplicate key value.

