

Specializing Continuations

a Model for Dynamic Join Points

Christopher Dutchyn
University of Saskatchewan



actually: What is an Aspect?

- Give examples
 - Distribution / tracing / instrumentation / ...
- Give implementations
 - It's what AspectJ (and any number of others) do
- ... lead to poor insight regarding
 - *what aspects are good for*
 - *how to best use them*



The key is *Modularity*

- So the question is

What do aspects modularize?



The key is *Modularity*

- So the question is

What do aspects modularize?



In general: crosscutting concerns

- Static aspects
 - Open classes
- Composition filters
- Object graph traversal (*Demeter*)
- Dynamic join points, pointcuts, and advice
- **Space is too large for a coherent answer**



Modeling Dynamic Aspects

- Join points
 - “*principled points in the execution*”
- Pointcuts
 - “*a means of identifying join points*”
- Advice
 - “*a means of affecting the semantics at those join points*”



Two Interacting Abstractions: *Join point* and *Advice*

```
[p proc(x) (if (call = 0 x)
              (raise zero)
              1)]
```

```
(begin (call p 1)
       (call p 2))
```

```
[a advise (exec p v)
         (try (proceed v)
              (catch zero ...))]
```

**Join
point**

Advice



Third Abstraction: *Pointcut*

```
[p proc(x) (if (call = 0 x)
              (raise zero)
              1)]
```

```
(begin (call p 1)
       (call p 2))
```

Pointcut

```
[a advise (exec p v)
         (try (proceed v)
              (catch zero ...))]
```

**Join
point**

Advice



Interaction Between Pointcut and Advice

```
[p proc(x) (if (call = 0 x)
              (raise zero)
              1)]
```

```
(begin (call p 1)
       (call p 2))
```

Pointcut

```
[a advise (exec p v)
  try (proceed v)
  (catch zero ...)]
```

Join
point

Advice




Idea

- A model of
 - dynamic join points,
 - pointcuts,
 - and advice,based on a continuation-passing style interpreter,
- provides a fundamental account of these AOP mechanisms.



Without Continuations

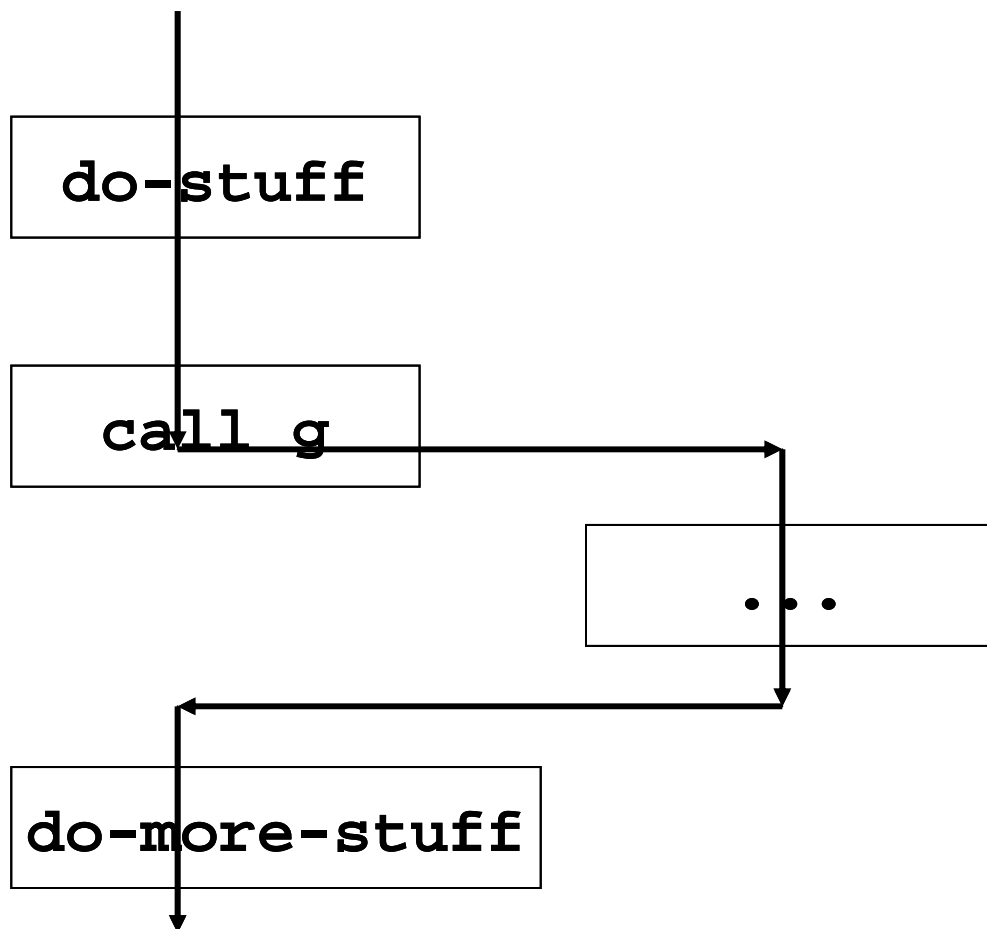


```
(define (f x)
  do-stuff
  (g x)
  do-more-stuff)
(define (g x) ...)
```



Continuations

[Strachey'67, Landin'68,...]

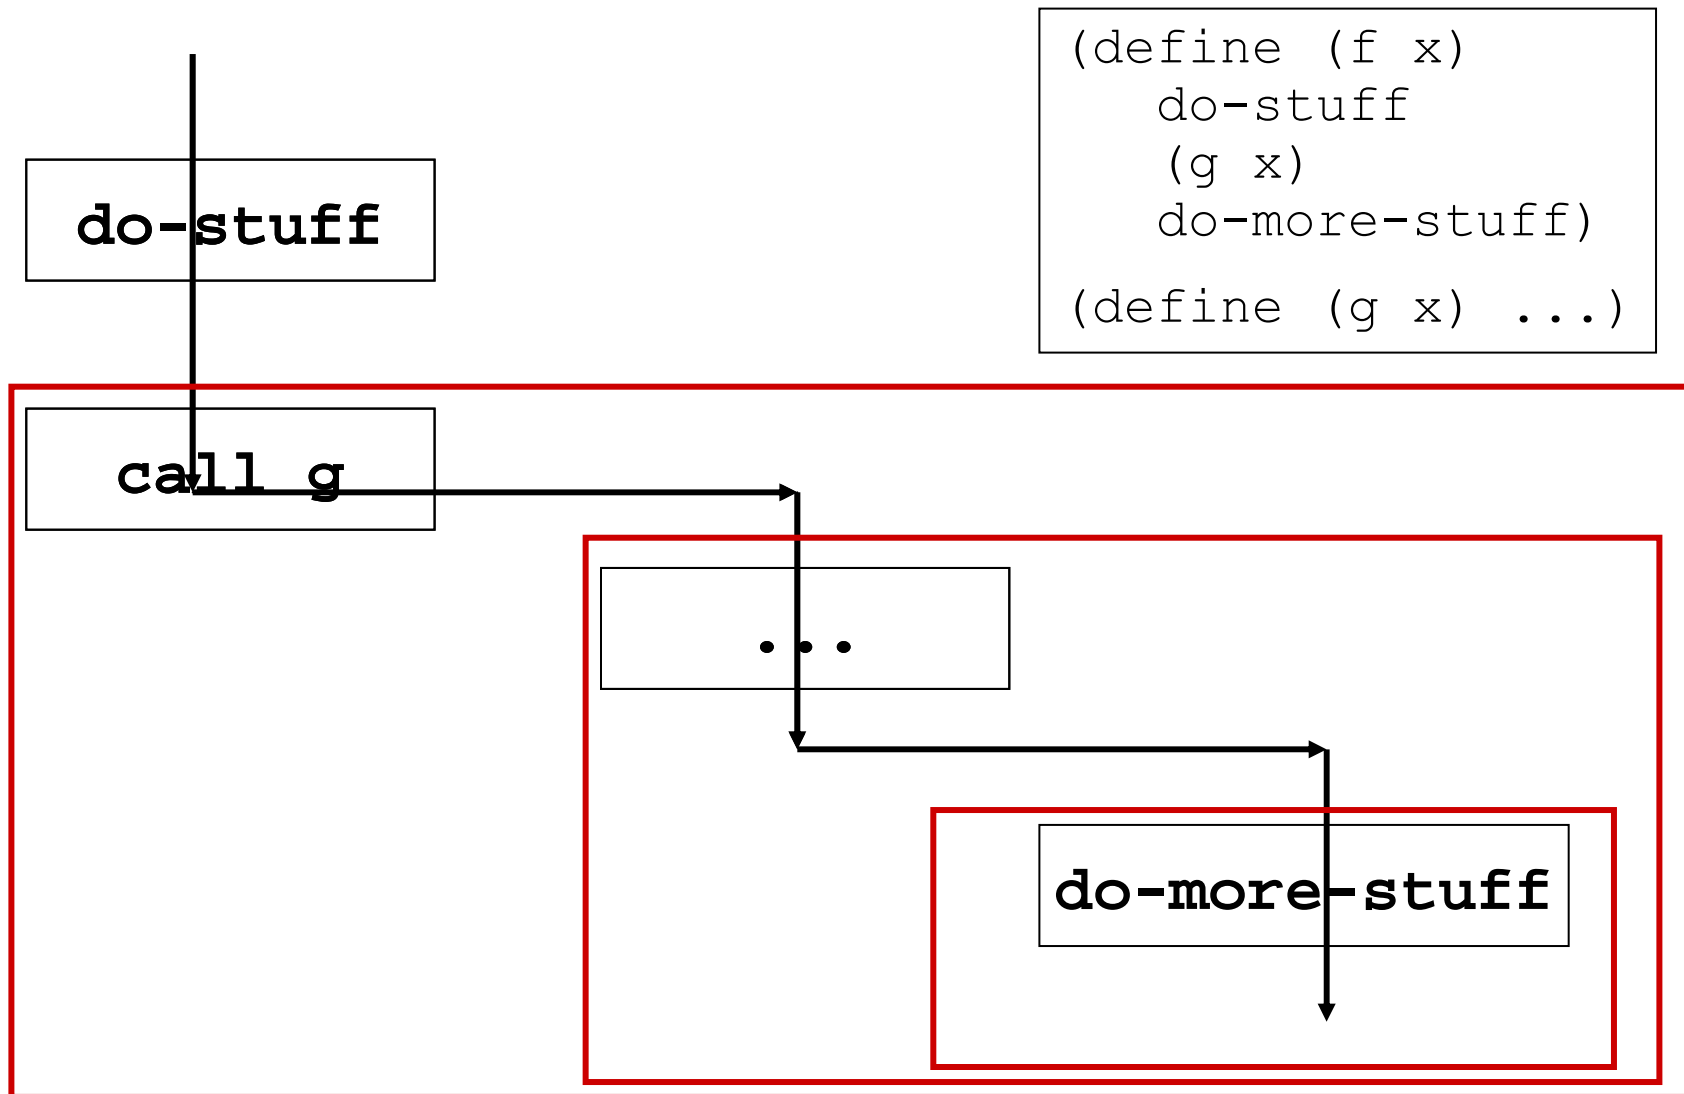

Model Development

- Begin with big-step semantics
 - definition of values, expressions
 - semantic definition of **eval**
 - Apply CPS transformation
 - yields continuations (as lambdas)
 - generates definition of **apply**
 - Defunctionalize
 - yields identifiable frames in continuation structure
- introduces auxiliary continuations
- yields frame structures
-



Defunctionalization [Reynolds '98, Ager+ '03]

- Procedures have structure
 - identifiers (argument names)
 - environment
 - expression (machine code)
- Continuations as escape procedures
 - have simple list/tree structure
 - fixed identifiers (next-continuation, argument)
 - predetermined environment
 - given semantics involving one operation



PROC Language

- Functions
 - 1st order, 2nd class
- Globals
- Standard syntax elements
 - If
 - Application
 - Primitives



Continuation Frames

Auxiliary

- facilitate eval regime
 - eager vs lazy
- **testF -- if**
- **randF -- args**
- **konsF -- args**
- **rhsF -- set**

Non-auxiliary

- Carry essential semantics of language
- **getF**
- **setF**
- **callF**
- **execF**



Insight ... Principle

Insight: frames align with dynamic join points

Dynamic Join Point	
Value Consumed	Frame Information
(loc i_global)	▶ (getF)
(loc i_global)	▶ (setF val)
(val*)	▶ (callF i_proc)
(proc i_proc)	▶ (execF val*)

Principle:

A dynamic join point is modeled as a state in the interpreter where values are applied to non-auxiliary continuation frames.



Pointcuts -- identify frames

- **callC**
 - convert a procedure name to a procedure value
 - NB: accepts an internal value: an identifier
 - then continue to execF
- **execC**
 - accept arguments and execute procedure
- **getC**
 - accept global location and provide its value
- **setC**
 - accept global location and update its value



Pointcuts - combinators

- **and**
- **or**
- **not**



Matching

- Take a pointcut, value and frame
- Capture
 - necessary context values
- Yields function to replace frame and value
 - Bind in a user-parameterized *reflective monad*
 - *Mendhekar and Friedman*



```

(define (match-pc c v f)
  ;: (pcut × val × frm) → match
  (cond ;...other cases omitted
    [(and (callC? c) (callF? f)
      (eq? (callC-pid c) (callF-id f)))
      (make-match (callC-ids c)
                  v
                  (lambda (nv)
                    (values nv f)))]
    [(and (execC? c) (execF? f)
      (eq? (lookup-proc (execC-pid c)) v))
      (make-match (execC-ids c)
                  (execF-args f)
                  (lambda (nv)
                    (values v (make-execF nv)))))]
  )

```



Wrinkle: `cfLowBelow` pointcut

- identifies join points based on control-flow context
- tail-call optimization discards context
- recovering context
 - 1) keep all of it
 - 2) preserve needed structure [CC'03]
 - dynamically threaded stack data structure
 - **or** state effect



cf lowabove pointcut

- Adds to ability to bound the context search from above
- **within**
 - Exclude subordinate procedure calls
- **enclosingexecution**
 - Stop at the next higher calling scope
- Not strictly necessary, but expressive



Weaving is dispatch

```
(define ((adv-step advs) f k) v)
  ::adv → (frm × cont) → !val
  (let loop ([advs advs])
    (cond [(null? advs) ((base-step f k) v)]
      [(match-pc (caar advs) v f) =>
        (lambda (m)
          (eval (cdar advs)
            (extend-env `(%proceed
                        %advs .
                        , (match-ids m))
                      ` (, (match-prcd m)
                        , (cdr advs) .
                        , (match-vals m))
                      empty-env)
            k)) ]
      [else (loop (cdr advs)) ]))
```



Model Accounts for Observation

- Our account requires a new join point
 - We needed a new continuation frame
 - `advF`
- Arises naturally in the model
 - Rather than adding (without explanation)
 - AspectJ
 - And others




Fundamental Construction

- continuations arise naturally in big-step to small-step translation
- frames arise mechanically in defunctionalization of continuations
- no new language construct required
 - no continuation marks [Dutchyn, Tucker, Krishnamurthi]
 - no context labels [Dantas, Walker, Washburn, Weirich]
 - no rewrite points [Aßmann, Ludwig]
 - no awkward thunks [Wand, Kiczales, Dutchyn]
 - no predicate dispatch [Orleans]



Dynamic Semantic Model

Abstraction	Model Element	Interaction
join point	frame activation	dispatch
advice	behaviour specification	dispatch
pointcut	frame identifier	table



- Distills other descriptions to essentials
 - continuation marks
 - context labels
 - thunks
- Key insight: dynamic join points, pointcuts and advice
 - provide mechanism to **modularize** and **specialize** control structure



Elegant, Evocative Model

- based on a fundamental language construct
- pointcuts align well with existing AOP languages
 - adds `cFlowabove` for simpler coding
 - explains provenience of `adviceexecution`
- clarifies relationship of DJP and reflection
- framework for understanding that dynamic aspects modularize control structure



Future Directions

- Object - Aspect Duality
 - Dynamic aspects modularize control (and associated operations)
 - Just as object modularize data (and associated operations)

Frame Activation	Pointcut	AspectJ
$(field_{location} i) \triangleright (getfield_{frame} o)$	getfield o.i	getfield o.i
$o \triangleright (setfield_{frame} field_{location} i)$	setfield o i	setfield o.i
$v* \triangleright (dispatch_{frame} o v*)$	dispatch o.i(...)	call o.i(...)
$(method_{location} i) \triangleright (exec_{frame} o v*)$	exec o.i(...)	exec o.i(...)
$v* \triangleright (allocate_{frame} i)$	alloc i(...)	init i(...)
$(class i) \triangleright (init_{frame} v*)$	init i(...)	preinitialize i(...)

Figure 51: Object-Oriented Dynamic Join Points

- Category theory?



Future Directions

- Reflective Monads
 - Within the continuation monad
 - identify and operate on the continuation and value
 - á la Mendhekar & Friedman and Filinski
 - Lost “chapter 3a” of my dissertation



Future Directions

- Typing Aspects -- *abstract control types*
 - Value typing (mundane PE) isn't enough
 - Must abstract the control restructuring too
 - Rinard et al., Katz et al., and others
- Second half of my dissertation
 - But, more sophisticated
 - Take polarized logic from Shan
 - And effect typing from many others



Future Directions

- **Static Aspects**
 - Introduce an account of phase separation
 - Elaboration vs. execution
 - Continuations in elaboration
 - = static join points?

- Masuhara and Kiczales (ECOOP 2003)



Discussion

